



Model Number


V19-G-BK5M-PUR-U-V19-G

Connection cable, M12 to M12, PUR cable 8-pin

Features

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Flame resistant cable
- Resistant to microbes and hydrolysis
- Halogen-free
- Degree of protection IP67 / IP68 / IP69K

Dimensions

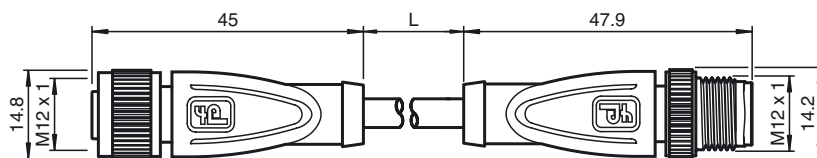

Technical data

General specifications

Number of pins	8
UL File Number	E231213

Electrical specifications

Operating voltage	U _B	max. 30 V AC/DC
Operating current	I _B	max. 2 A

Ambient conditions

Ambient temperature	Body: -40 ... 90 °C (-40 ... 194 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
Pollution Degree	3

Mechanical specifications

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67 / IP68 / IP69k
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	Diecast zinc
Core insulation	PP
Cable	fine-strand, flexible
Sheath diameter	Ø 6 mm
Bending radius	> 10 x cable diameter, moving > 8 x cable diameter, fixed
Color	black
Cores	8 x 0.25 mm ²
Conductor construction	14 x 0.15 mm Ø
Length	L 5 m
Flammability	
Contact material	HB
Housing	V-2
Cable	FT2


Compliance with standards and directives

Standard conformity	
Degree of protection	EN 60529:2000
Standards	IEC 61076-2-101:2008
Flammability	Grip: UL 94 Cable: UL 1581 Section 1100; IEC 60332-1-2:2004
Halogen-free	IEC 60754-1:1994

Approvals and certificates

UL approval	UL Recognized General purpose
-------------	-------------------------------

Electrical connection

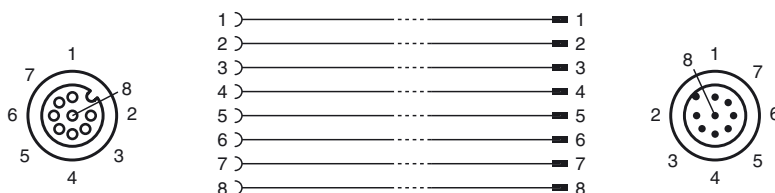

Release date: 2015-02-13 08:38 Date of issue: 2015-02-13 240775-0046_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com


Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com



Maximum permissible operating voltage ≤ 30 V

Maximum permissible ambient temperature ≤ 80 °C (≤ 176 °F)



Release date: 2015-02-13 08:38 Date of issue: 2015-02-13 240775-0046_eng.xml