


RoHS  
Compliant



## Features

- Ideal for printed circuit board
- Reliable low cost construction
- Plastic material
- High case dielectric strength of 1,500V<sub>RMS</sub>
- Surge overload rating to 200 amperes peak
- High temperature soldering guaranteed: 260°C/10 seconds / 0.375 inch, (9.5mm) lead lengths

## Mechanical Data

Case	: Molded plastic body
Terminals	: Plated leads solderable per MIL-STD-750, Method 2026
Weight	: 0.3 ounce, 8.0 grams
Mounting torque	: 5in. Maximum

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load, derate current by 20%






Characteristics	Symbol	Values	Units
Max. Recurrent Peak Reverse Voltage	$V_{RRM}$	400	V
Max. RMS Voltage	$V_{RMS}$	280	
Max. DC Blocking Voltage	$V_{DC}$	400	
Max. Average Forward Rectified Current at $T_c = 100^\circ\text{C}$	$I_{(AV)}$	10	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	$I_{FSM}$	220	
Maximum Instantaneous Forward Voltage at 5.0A at 10A	$V_F$	1.0 1.1	V
Maximum DC Reverse Current at $T_A = 25^\circ\text{C}$ at Rated DC Blocking Voltage at $T_A = 125^\circ\text{C}$	$I_R$	5.0 500	$\mu\text{A}$
Typical Junction Capacitance (Note 3)	$C_J$	221	pF
Typical Thermal Resistance Per Leg (Note 1) (Note 2)	$R_{\theta JA}$ $R_{\theta JC}$	21 2.0	$^\circ\text{C}/\text{W}$
Operating Temperature Range	$T_J$	-50 to +150	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$		

**Notes 1:** Units Mounted in Free Air No Heat Sink on PCB 0.5 × 0.5 inches (12mm × 12mm) Copper Pads, 0.375 inch (9.5mm) Lead Length.

**2:** Device Mounted on 4 x 6 x 0.25 inches Plate Heatsink


**3:** Measured at 1.0MHz and applied Reverse Voltage of 4.0V

## Ratings and Characteristic Curves

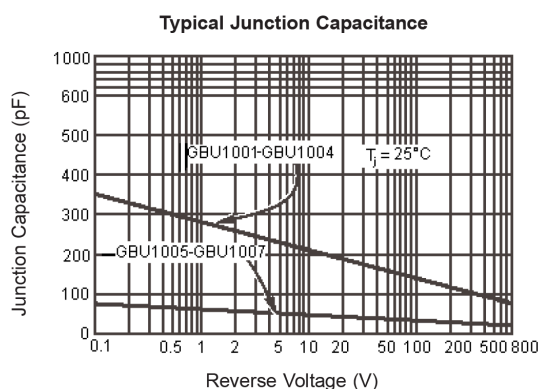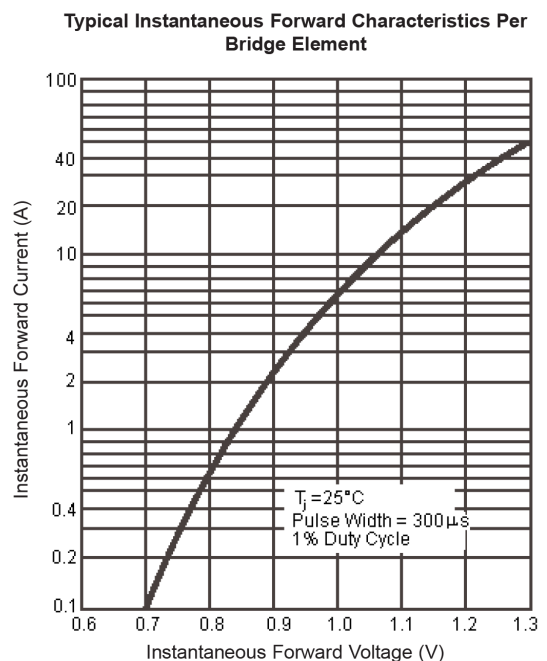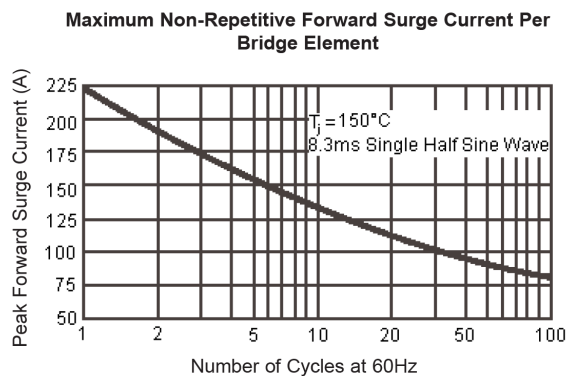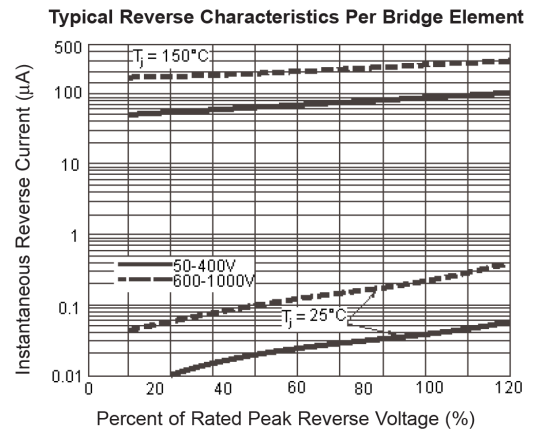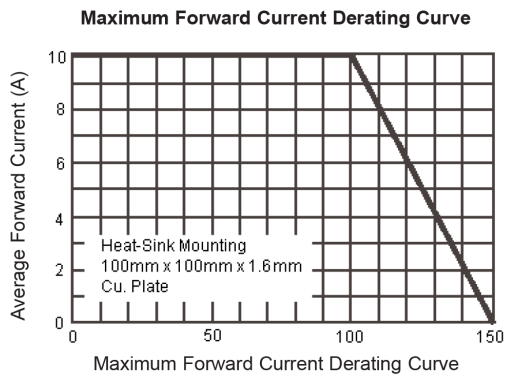

# Bridge Rectifier Diode

## Dimensions:

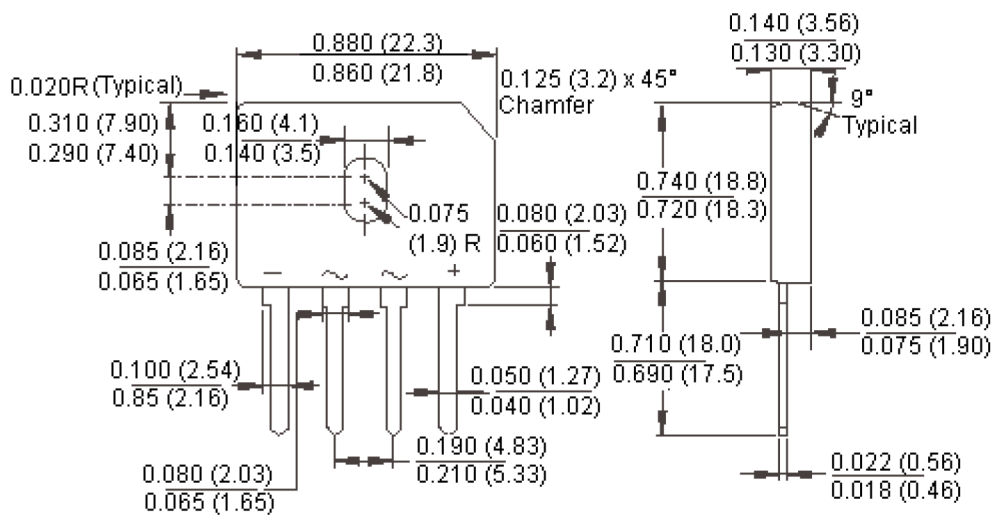

Dimensions : Inches (Millimetres)

## Part Number Table

Description	Part Number
Bridge Rectifier, 10A, 400V	GBU1004+

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.