


Electrical Fastening & ID Solutions Guide

UTILITY

CABLE MANAGEMENT

INFRASTRUCTURE

IDENTIFICATION

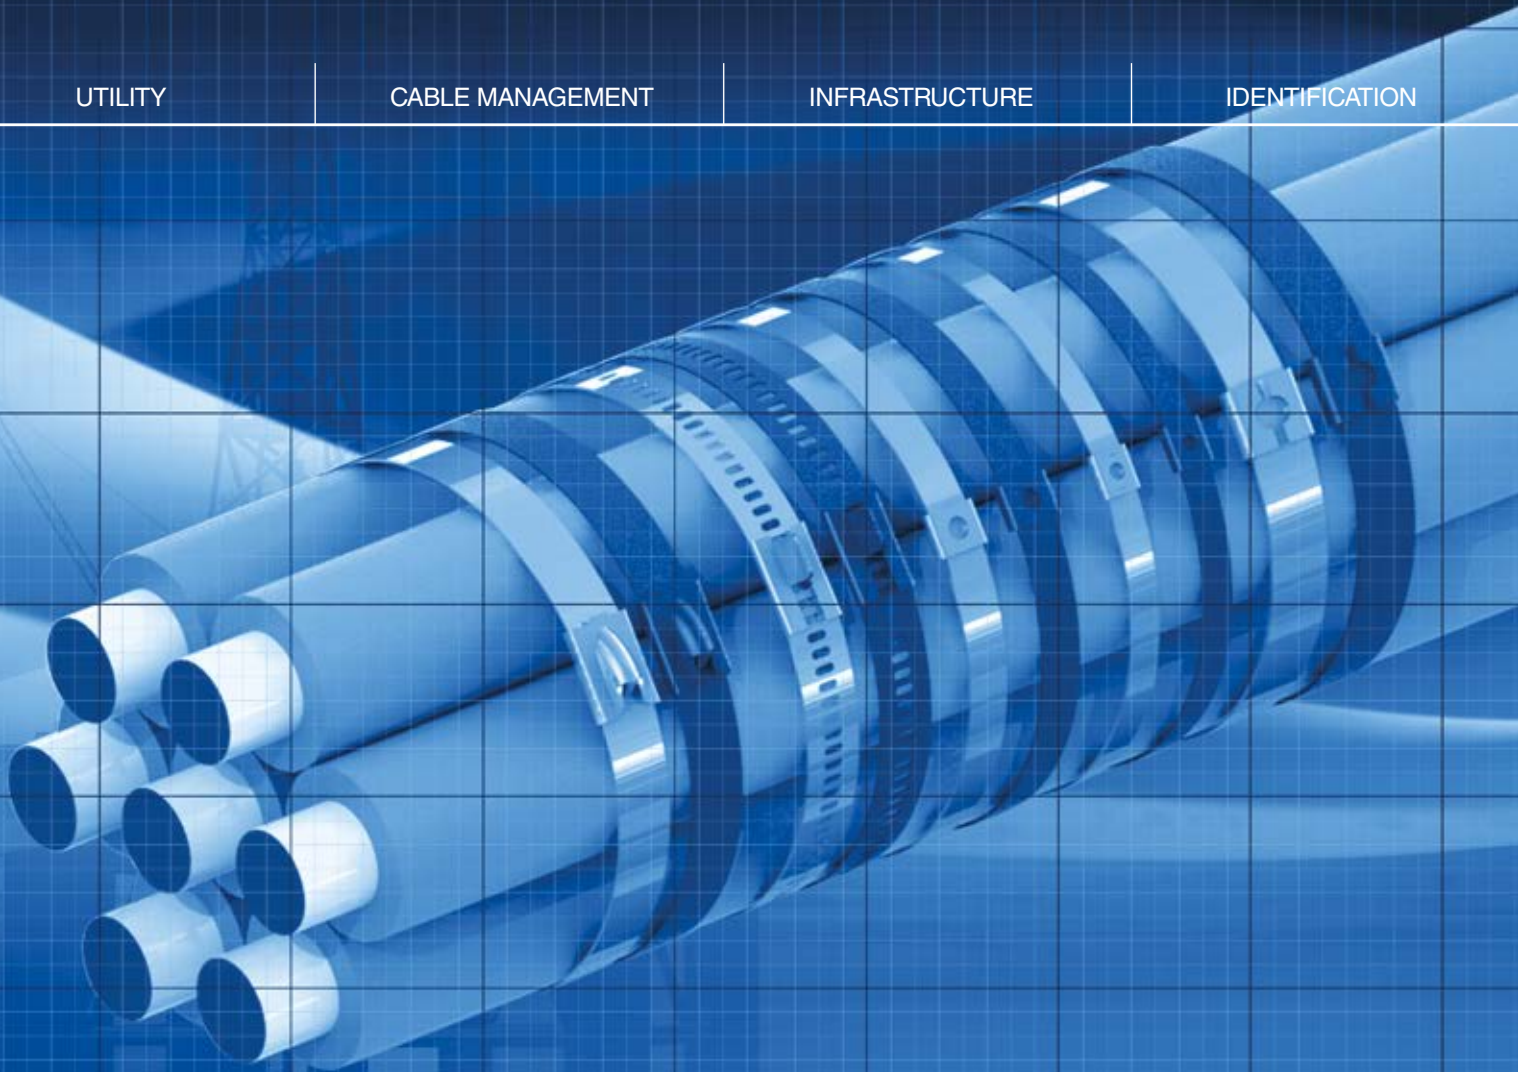

BAND-IT[®]
Engineered Fastening Solutions

BAND-IT® IDEX, Inc. is a high quality, innovative fastening solutions company providing service and value second to none!



Founded in Denver, Colorado in 1937, BAND-IT® is acknowledged as the world's leader in quality engineered band clamping systems. A unit of IDEX corporation, BAND-IT® has an international network of representatives and distributors, with manufacturing and distribution facilities serving users worldwide.

IDEX Core Values

- Our **CUSTOMER** is our priority.
- We **GROW** our enterprise and people.
- Our **INTEGRITY** is paramount.
- We strive for **EXCELLENCE**.
- We are passionate about **SUCCESS**.

Certificates

As demonstration of our ongoing commitment to excellence, quality and environmental management, BAND-IT® is proud to display the following certificates of compliance to the prestigious International Standards:

- ISO 9001
- ISO 14001
- TS16949

Since becoming ISO/TS certified, BAND-IT® continues to seek new and innovative ways to manufacture products through our continuous efforts of upgrading equipment, employee training and internal quality assurance in our quest to deliver the best products within the market place to our customers.

Patents

- 5,483,998 - Lip lock formation for Ultra-Lok®.
- 5,566,726 - Ultra-Lok® tension tool.
- 5,303,571 - Method of producing an improved one-piece band clamp.
- 5,452,523 - Measuring banding material in lengths.
- 5,850,674 - Smooth band clamp with movable ball locking element.
- 6,014,792 - Ultra-Lok® band clamp including separately attached buckle.
- 6,260,704 B - Band tote assembly.
- 6,481,467 - Pneumatic Automatic Air Tool S350.
- 7,650,680 - Improved dimple locking method for bundling objects.
- 7,484,274 - Free end band and seal.

Trademarks

BAND-IT®, BAND-IT Jr.®, Junior®, BAND-FAST®, COLOR-IT®, Tri-Lokt®, Thriftool®, Tie-Lok®, Tie-Lok Tool®, Band-Lok®, Self-Lok®, and Ultra-Lok® are registered trademarks owned by BAND-IT IDEX, Inc., a unit of IDEX Corporation.

World Headquarters

North American Operations
BAND-IT IDEX, Inc.
Western Hemisphere Sales and Marketing
Tel: (303) 320-4555
Toll Free : 800-525-0758
Fax: (303) 333-6549
Email:
info.BAND-IT@idexcorp.com
Website:
www.band-it-idex.com

European Operations

BAND-IT® Company Limited
Tel: (44) 1246-477333
UK Sales Tel:
(44) 1246-479479
European Sales Tel:
(44) 1246-479480
Fax (44) 1246-476324
Sales Email:
BIU.UKSales@idexcorp.com
Email:
EUROPEinfo.BAND-IT@idexcorp.com
Website:
www.band-it-idex.eu

Singapore Sales Office

Tel: (65) 6764-4020
Fax: (65) 6265-8902
Email:
PACIFICRIMinfo.BAND-IT@idexcorp.com
Website:
www.band-it.com.sg

Latin American Sales Office

Tel: (52) 55 5825-8502
Fax: (52) 55 5825-8502
Email:
LAinfo.BAND-IT@idexcorp.com

Japan Sales Office

Tel: (81) 90 2917 8463
Email:
BJD.Japaninfo.BAND-IT@idexcorp.com

China Shanghai Sales Office

Tel: (86) 21 5241-5599
Fax: (86) 21 5241-8338
Email:
Chinainfo.BAND-IT@idexcorp.com
Website
www.band-it.com.cn



BAND-IT® Certifications and Approvals



DNV GL

DNV GL is one of the world's leading classification and certification bodies operating in the Maritime, Oil & Gas & Energy industries.



American Bureau of Shipping (ABS)

A classification sign and construction of new vessels and the integrity of existing vessels and marine structures.



Lloyd's Register Group

A maritime classification society and independent risk management organization providing risk assessment and mitigation services and management systems certification. Historically, as Lloyd's Register of Shipping, it was a specifically maritime organization.



Russian Maritime Register of Shipping (RS)

The activities of Russian Maritime Register of Shipping (RS) are aimed at providing the safety of navigation, safety of life at sea, security of ships, safe carriage of cargo, environmental safety of ships, prevention of pollution from ships, performance of authorizations issued by Administrations and customers.

RS develops and continually improves the RS rules and guidelines in compliance with requirements of the international standards to ensure the safety at sea and pollution prevention.

The RS task is both to maintain its own quality management system at the highest possible level and to promote also implementation of high technical standards in design of ships, shipbuilding and shipping industry using its unique experience in ensuring maritime safety.



Underwriters Laboratories (UL)

An independent product safety certification organization that develops standards and test procedures for products, materials, components, assemblies, tools and equipment, chiefly dealing with product safety.

Aramco 9COM

BAND-IT® is registered as an Aramco 9COM manufacturer.



British Standards Institution (BSI)

The BSI is the business standards company that helps organizations all over the world make excellence a habit. We have many varied partners. These include international standards bodies, such as ISO, external consultants who help our clients and professional affiliations.



ISO TS 16949

ISO/TS 16949 is designed to address quality management in the automotive supply chain. It is based on the eight quality management principles: customer focus, leadership, involvement of people, process approach, system approach to management, continual improvement, fact-based decision making, and mutually beneficial supplier relationships. In addition, ISO/TS 16949 focuses on customer specific requirements.

ISO 14001

The ISO 14000 environmental management standards exist to help organizations (a) minimize how their operations (processes, etc.) negatively affect the environment (i.e. cause adverse changes to air, water, or land); (b) comply with applicable laws, regulations, and other environmentally oriented requirements, and (c) continually improve in the above.

ISO 9001

The ISO 9000 family of standards relate to quality management systems and are designed to help organizations ensure they meet the needs of customers and other stakeholders. The standards are published by ISO, the International Organization for Standardization and available through National standards bodies. ISO 9000 deals with the fundamentals of quality management systems, including the eight management principles on which the family of standards is based. ISO 9001 deals with the requirements that organizations wishing to meet the standard have to fulfill.



CE

CE marking is a mandatory conformity mark for products placed on the market in the European Economic Area (EEA). With the CE marking on a product the manufacturer ensures that the product conforms with the essential requirements of the applicable EC directives. The letters "CE" stand for "Conformité Européenne" ("European Conformity").



United States Coast Guard

United States Coast Guard type approval is the primary process for equipment and materials to receive Coast Guard approval. For equipment or materials to receive Type Approval, they must be demonstrated to comply with the relevant requirements in the regulations, successfully complete the specified tests, and be enrolled in a quality control or follow up program as required.



GOST-R approval

GOST (Russian: ROCT) refers to a set of technical standards maintained by the Euro-Asian Council for Standardization, Metrology and Certification (EASC), a regional standards organization operating under the auspices of the Commonwealth of Independent States (CIS)

Contents

PAGE

6-7	Band & Buckle – 201, AA and 316
8	Valustrap / Valustrap Plus / Valuclip
9	Ultra-Lok Clamping System
10	PPA Coated / Uncoated 316 Band & Clips
11	All Purpose Band
12	BAND-FAST® Clamps – PPA Coated
13	BAND-FAST® Clamps – Uncoated
14	Stainless Steel Cable Ties
15	BAND-IT® Ties PPA Coated / Uncoated
16	Multi-Lok
17	Ball-Lok
18	Selectively Coated Ball-Lok
19	Tie-Lok
20	Stainless Steel Embossing Systems
21-22	Easy-Read Identification / ID Kit
23	ID Tags & Systems
24-25	Mounting Brack-Its™
26-28	Hand Tools
29	Power Tools
30-31	Index





Definitions

Corrosion Resistance – The ability of a material to withstand degradation in specific environments.

Clamping Force (Retained Force) – The amount of force applied to an object by an installed clamp or tie. The clamping force maintains the assembly integrity and hardware placement.

Ultimate Strength – The maximum tensile or clamping force that a band clamp or tie will withstand prior to breaking.

Yield Strength – The point at which the material begins to stretch as a result of stress being applied. Loading beyond this point will result in deformation.

Loop Tensile Strength – The amount of force, applied radially, an installed clamp/tie will withstand prior to failure.

Epoxy – A powder coating material with a good level of corrosion and chemical resistance.

Nylon 11 – Non-toxic polymer cable tie coating resistant to stress, cracking, abrasion, impact, high corrosion resistance, excellent chemical resistance to various acids and alkine materials (chemical resistance information can be provided). When subjected to fire, this coating is self extinguishing, produces low amounts of smoke, and is halogen free.

PPA 571 – (Performance Polymer Alloy) A non-toxic polymer coating resistant to stress cracking, abrasion, impact, high corrosion resistance, excellent chemical resistance to various acids and alkaline materials (chemical resistance information can be provided). When subjected to fire, this coating is free from halogen, phthalates, isocyanates and heavy metals and produces low amounts of smoke.

Application Tool – Tools to install band clamps and tie products consistently.

Stainless Steel grades:

Type 201 Stainless Steel (EN 1.4372)

Type 201 is an austenitic chromium-nickel-manganese steel, with excellent tensile properties. It offers good resistance to oxidation and many mild to moderate corrosive agents. Type 201 is used where greatest strength is required. It is the BAND-IT material most commonly used.

Type 304 Stainless Steel (EN 1.4301)

Type 304 is an all purpose austenitic, low carbon 18-8 chromium-nickel stainless steel. It has good corrosion resistance and weldability. Type 304 is the most widely used stainless steel. It is found in chemical and food processing equipment, hospital and paper mill equipment, heat exchangers, etc.

Type 316 Stainless Steel (EN 1.4401)

Type 316 is an austenitic chromium-nickel stainless and heat resisting steel with superior corrosion resistance. It is extensively used in marine atmospheres and environments where it is subjected to various chemicals, salts, acids, and high temperatures. Type 316 has superior creep strengths at elevated temperatures.

Austenitic Stainless Steel

Austenitic stainless steels are chromium-nickel-iron (series 300) or chromium-nickel-manganese-iron (series 200) alloys. Austenitic stainless steels are non-magnetic in the annealed condition but, depending on the composition (mainly the nickel and manganese content), they become slightly magnetic when cold worked. Austenitic stainless steel cannot be hardened by heat treating but only by cold working. They are the most popular grades of stainless steel due to their excellent formability and corrosion resistance.



BAND & BUCKLE PRODUCTS



201 or 316 Stainless Steel Band

- Band & Buckle can be quickly formed to suit virtually any diameter.
- 201 SS, bright annealed finish sets the standard with a combination of high strength and quality appearance.
- 201 SS offers good resistance to oxidation and many moderate corrosive agents.
- 316 SS version offers extra corrosion resistance against salt mist and many chemicals
- Easy Scale – Patented imprint on the band to enable precise use of band without waste.
- Dispensers – durable plastic dispensers available with centre turn facility and pocket for buckles.

BAND-IT® Band 201 & 316 Stainless Steel • With Easy-Scale 100 Ft. per roll (30.5m)

PART NUMBER 201 SS	PART NUMBER 316 SS	WIDTH		THICKNESS		WEIGHT	
		IN.	MM	IN.	MM	LBS	KGS
C202	—	1/4	6.35	0.020	0.51	1.7	0.8
C203	C403	3/8	9.53	0.025	0.63	3.2	1.5
C204	C404	1/2	12.70	0.029	0.72	5.1	2.3
C205	C405	5/8	15.88	0.029	0.72	6.4	2.9
C206	C406	3/4	19.05	0.029	0.72	7.7	3.5

Available in mill coil lengths. All sizes in standard cardboard packaging. All sizes except C202 available in plastic dispensers (see table below).



C001 / C003 / C400 / J020 / J075

See pages 26-29 for full details on TOOLS and their specifications.



BAND-IT® Buckles 201 Stainless Steel • Pack Qty – 100

PART NUMBER	WIDTH		WEIGHT	
	IN.	MM	LBS	KGS
C252*	1/4	6.35	0.3	0.1
C253	3/8	9.53	0.8	0.4
C254	1/2	12.70	2.1	1.0
C255	5/8	15.88	2.4	1.1
C256	3/4	19.05	3.7	1.7



* Free-End Clip design (1/4", 6.35mm only)

BAND-IT® Buckles 316 Stainless Steel • Pack Qty – 100

PART NUMBER	WIDTH		WEIGHT	
	IN.	MM	LBS	KGS
C453	3/8	9.53	0.8	0.4
C454	1/2	12.70	2.1	1.0
C455	5/8	15.88	2.4	1.1
C456	3/4	19.05	3.7	1.7



BAND-IT® Band Dispensers 201 & 316 Stainless Steel

100 Ft. per roll (30.5m) • Plastic Dispenser complete with band

PART NUMBER 201 SS	PART NUMBER 316 SS	WIDTH		DESCRIPTION	THICKNESS		WEIGHT	
		IN.	MM		IN.	MM	LBS	KGS
C203Y	C403Y	3/8	9.53	Band + Yellow Dispenser	0.025	0.63	3.62	1.6
C204B	C404B	1/2	12.70	Band + Blue Dispenser	0.029	0.72	5.56	2.5
C205G	C405G	5/8	15.88	Band + Green Dispenser	0.029	0.72	6.85	3.1
C206R	C406R	3/4	19.05	Band + Red Dispenser	0.029	0.72	8.16	3.7

1/4" (6.35mm) band not available in dispenser





Any Austenitic Stainless Steel Band

- 200-300 series stainless steel strapping
- Offers good resistance to oxidation and many moderate corrosive agents.
- Easy Scale – Patented imprint on the band to enable precise use of band without waste.
- Dispensers – Handy plastic dispensers available with centre turn facility and pocket for buckles.



C001 / C003 / C400 / J020 / J075

See pages 26-29 for full details on TOOLS and their specifications.



BAND-IT® Band Austenitic Stainless Steel • With Easy-Scale 100 Ft. per roll (30.5m)

PART NUMBER	WIDTH		THICKNESS		WEIGHT	
	IN.	MM	IN.	MM	LBS	KGS
C923	3/8	9.53	0.024	0.60	3.2	1.5
C924	1/2	12.70	0.029	0.72	4.8	2.2
C925	5/8	15.88	0.029	0.72	6.2	2.8
C926	3/4	19.05	0.029	0.72	7.5	3.4

Available in mill coil lengths. All sizes in standard cardboard packaging.
All sizes available in plastic dispenser see table below.

BAND-IT® Buckles Austenitic Stainless Steel • Pack Qty – 100

PART NUMBER	WIDTH		WEIGHT	
	IN.	MM	LBS	KGS
C953	3/8	9.53	0.8	0.4
C954	1/2	12.70	2.1	1.0
C955	5/8	15.88	2.4	1.1
C956	3/4	19.05	3.7	1.7



BAND-IT® Band Dispensers Austenitic Stainless Steel 100 Ft. per roll (30.5m) • Plastic Dispenser complete with band

PART NUMBER	WIDTH		DESCRIPTION	THICKNESS		WEIGHT	
	IN.	MM		IN.	MM	LBS	KGS
C923Y	3/8	9.53	Band + Yellow Dispenser	0.024	0.60	3.2	1.5
C924B	1/2	12.70	Band + Blue Dispenser	0.029	0.72	5.0	2.3
C925G	5/8	15.88	Band + Green Dispenser	0.029	0.72	6.4	2.9
C926R	3/4	19.05	Band + Red Dispenser	0.029	0.72	7.7	3.5



VALUSTRAP™ – Any Austenitic Stainless Steel Band



- A non-magnetic 200-300 AA grade stainless steel strapping
- Used for securing light weight signs, pipe insulation, cable bundling, and a variety of other lightweight fastening applications
- Good corrosion resistance



C001 / C075 / C400

See pages 26-29 for full details on TOOLS and their specifications.

Valustrap™

Austenitic Stainless Steel • Thickness 0.015" (0.38mm)

100Ft. Roll (30.5M)					300Ft. Roll (91.5M)		
PART NUMBER	WIDTH		WEIGHT		PART NUMBER	WEIGHT	
	IN.	MM	LBS	KGS		LBS	KGS
C133	3/8	9.53	2.2	1.0	C123	5.7	2.6
C134	1/2	12.70	2.9	1.3	C124	7.7	3.5
C135	5/8	15.88	3.6	1.7	C125	9.7	4.4
C136	3/4	19.05	4.4	2.0	C126	11.7	5.3

Available in mill coil lengths. All sizes in standard cardboard packaging

Valustrap™ Plus 100Ft. Roll (30.5M)

Austenitic Stainless Steel • Thickness 0.020" (0.51mm)

PART NUMBER	WIDTH		WEIGHT	
	IN.	MM	LBS	KGS
C191	3/8	9.53	2.9	1.3
C181	1/2	12.70	3.8	1.7
C171	5/8	15.88	5.6	2.5
C161	3/4	19.05	5.7	2.6

Available in mill coil lengths

304 Stainless Steel Band 200Ft. Roll (61M)

304 Stainless Steel • Thickness 0.015" (0.38mm)

PART NUMBER	WIDTH		WEIGHT	
	IN.	MM	LBS	KGS
C903	3/8	9.53	4.4	2.0
C904	1/2	12.70	5.8	2.6
C905	5/8	15.88	7.3	3.2
C906	3/4	19.05	8.8	3.9

Available in mill coil lengths



Valuclips™ Pack Qty – 100 • Austenitic Stainless Steel

PART NUMBER	WIDTH		WEIGHT	
	IN.	MM	LBS	KGS
C153	3/8	9.53	0.6	0.3
C154	1/2	12.70	1.1	0.5
C155	5/8	15.88	1.2	0.5
C156	3/4	19.05	2.1	0.9



Valuclip™

Ultra-Lok® Clamping System




Ultra-Lok® Free
End Clamps and
Buckles

The stronger and faster alternative to band and buckle

Designed for quick installation, tightest clamping force and gap-free inside diameter. The strongest band clamping system available.

- Smooth inside diameter designed to eliminate leak paths
- Single or double wrapped 1/4 hardened 201SS for superior clamping strength
- Locks under full tension (no slip-back) maximizing clamping force
- Applied four times faster than band and buckle
- Consistent and repeatable tensioning
- Buckle is thicker and 2-3 times stronger than other clamps
- Buckle hood protects lock from snags
- Ideal for field repairs / heavy duty bundling / attachment of Brack-Its and equipment to poles, etc



UL4000 / UL9010

See pages 26-29 for full details on TOOLS and their specifications.

Ultra-Lok® Free End Clamps

Type 201 1/4 hardened stainless steel band • Thickness 0.030" (0.76mm)

PART NUMBER	CLAMP DIAMETER				BAND WIDTH		LENGTH		WIDTH		PACKAGE QTY
	SINGLE WRAP		DOUBLE WRAP								
	In	mm	In	mm	In	mm	In	mm	Lbs	Kg	
UL2030	8.0	203.2	3.8	96.5	3/4	19.05	30	762	5.25	2.39	25
UL2042	11.8	299.7	5.7	144.8	3/4	19.05	42	1067	7.00	3.18	25
UL2060	17.5	444.5	8.6	218.4	3/4	19.05	60	1524	10.25	4.66	25
UL2084	25.2	640.1	12.4	315.0	3/4	19.05	84	2134	14.75	6.70	25
UL2120	36.6	929.6	18.2	462.3	3/4	19.05	120	3048	20.50	9.32	25
UL1018	3.0	76.2	–	–	1/2	12.70	18	457	2.00	0.91	50
UL1024	5.0	127.0	–	–	1/2	12.70	24	610	2.75	1.25	50
UL1028	6.0	152.4	3.0	76.2	1/2	12.70	28	711	3.25	1.48	50
UL1032	7.0	177.8	3.5	88.9	1/2	12.70	32	813	3.50	1.59	50
UL1036	8.0	203.2	4.0	101.6	1/2	12.70	36	914	4.00	1.82	50
UL1046	11.0	279.4	5.5	139.7	1/2	12.70	46	1168	5.90	2.70	25
UL1056	14.0	355.6	7.0	177.8	1/2	12.70	56	1422	7.10	3.20	25
UL1070	18.0	457.2	9.0	228.6	1/2	12.70	70	1778	8.50	3.90	25
UL1086	22.0	558.8	11.0	279.4	1/2	12.70	86	2184	10.20	4.60	25
UL1096	25.0	635.0	12.5	317.5	1/2	12.70	96	2438	11.20	5.10	25
UL1106	28.0	711.2	14.0	355.6	1/2	12.70	106	2692	12.70	5.80	25
UL1116	31.0	787.4	15.5	393.7	1/2	12.70	116	2946	13.30	6.00	25

* 1/2" Bands will require MO9387 shear plate fitted to UL9010 and UL4000 tools

Ultra-Lok® Free End Buckles

201 Stainless Steel • Pack Qty – 100

PART NUMBER	WIDTH		WEIGHT	
	IN.	MM	LBS	KGS
UB254	1/2	12.70	2.4	1.1
UB256	3/4	19.05	3.7	1.7

Coated and Uncoated Stainless Steel Band & Clips



BAND-IT® PPA Coated and Uncoated Stainless Steel Band.

- Recommended in applications where vibration is a concern
- 316SS band available with Performance Polymer Alloy PPA 571 coating that protects against effects of vibration and contact of dissimilar metals
- Resistant to chemicals, salt spray and UV light
- Apply using BAND-IT® AE Series 316 Stainless Steel Clips and the C075 Bantam Tool
- Available in coils or pre-cut lengths with clip encapsulated at end (see pages 12-13 – BAND-FAST™ clamps)
- 201 grade stainless steel also available



Coated C075 / C400

Uncoated C001 / C075 / C400

See pages 26-29 for full details on TOOLS and their specifications.

PPA Coated 316 and 201 Stainless Steel Band

PPA 571 Coated • Pack Qty – 1

PART NUMBER 316 SS	PART NUMBER 201 SS	WIDTH		LENGTH		WEIGHT	
		IN.	MM	FT	M	LBS	KGS
AE432	–	1/4	6.35	82.5	25	2.0	0.9
AE433	AE933	3/8	9.53	82.5	25	2.6	1.2
AE434	AE934	1/2	12.70	82.5	25	3.5	1.6
AE435	AE935	5/8	15.88	82.5	25	4.4	2.0
AE436	AE936	3/4	19.05	82.5	25	5.3	2.4

Approximate thickness = 0.048" (1.22mm), when coated
Steel thickness before coating = 0.015" (0.38mm)



Uncoated 316 Stainless Steel Band

Pack Qty – 1 • Thickness = 0.015" (0.38mm)

PART NUMBER	WIDTH		LENGTH		WEIGHT	
	IN.	MM	FT	M	LBS	KGS
AE442	1/4	6.35	82.5	25	2.0	0.9
AE443	3/8	9.53	82.5	25	2.6	1.2
AE444	1/2	12.70	82.5	25	3.5	1.6
AE445	5/8	15.88	82.5	25	4.4	2.0
AE446	3/4	19.05	82.5	25	5.3	2.4

Available in mill coil lengths. All sizes in standard cardboard packaging

Clips Uncoated Type 316 Stainless Steel • Pack Qty – 100

PART NUMBER	WIDTH		WEIGHT	
	IN.	MM	LBS	KGS
AE452	1/4	6.35	0.3	0.1
AE453	3/8	9.53	0.6	0.3
AE454	1/2	12.70	1.0	0.4
AE455	5/8	15.88	1.1	0.5
AE456	3/4	19.05	1.3	0.6

Coated clips are available – prices on request



All Purpose Band



- Standard black coating
Other colours are available on request

BAND-IT® All Purpose Band offers versatility within varying temperatures and applications.

All Purpose Band is ideal for bending and forming around virtually any section or shape. Resistant to physical abrasion, UV light and corrosive environments for many applications where plastic cable ties are simply inadequate or even dangerous.

- 316 Stainless steel or galvanised carbon steel
- Pre-punched holes make fastening quick and easy
- Easy to form around any section
- Flame retardant Low Smoke PPA coating
- Thick coating – kind to hands / cable
- Halogen free
- Simple fastening with nuts, bolts, screws
- Three widths available

BAND-IT® All Purpose Band Pack Qty – 1 Roll

PART NUMBER	MATERIAL	WIDTH		THICKNESS*		DIAMETER OF HOLE		PACKAGE WEIGHT		ROLL LENGTH
		IN	MM	IN	MM	IN	MM	LBS	KGS	M
AE405	316 SS U	1/2	12	0.030	0.76	3/16	5	3.1	1.4	10
AE406	316 SS U	3/4	17	0.030	0.76	9/32	7	5.3	2.4	10
AE407	316 SS U	1	26	0.030	0.76	5/16	8	7.3	3.3	10
AE425	316 SS U	1/2	12	0.030	0.76	3/16	5	3.1	1.4	25
AE426	316 SS U	3/4	17	0.030	0.76	9/32	7	5.3	2.4	25
AE427	316 SS U	1	26	0.030	0.76	5/16	8	7.3	3.3	25
AE465	316 SS C	1/2	12	0.050	1.3	3/16	5	3.1	1.4	10
AE466	316 SS C	3/4	17	0.050	1.3	9/32	7	5.3	2.4	10
AE467	316 SS C	1	26	0.050	1.3	5/16	8	7.3	3.3	10
AE475	316 SS C	1/2	12	0.050	1.3	3/16	5	3.1	1.4	25
AE476	316 SS C	3/4	17	0.050	1.3	9/32	7	5.3	2.4	25
AE477	316 SS C	1	26	0.050	1.3	5/16	8	7.3	3.3	25
AE505	GCS U	1/2	12	0.030	0.76	3/16	5	1.2	0.6	10
AE506	GCS U	3/4	17	0.030	0.76	9/32	7	2.0	0.9	10
AE507	GCS U	1	26	0.030	0.76	5/16	8	4.0	1.8	10
AE565	GCS C	1/2	12	0.050	1.3	3/16	5	1.2	0.6	10
AE566	GCS C	3/4	17	0.050	1.3	9/32	7	2.0	0.9	10
AE567	GCS C	1	26	0.050	1.3	5/16	8	4.0	1.8	10
AE575	GCS C	1/2	12	0.050	1.3	3/16	5	3.1	1.4	25
AE576	GCS C	3/4	17	0.050	1.3	9/32	7	5.3	2.4	25
AE577	GCS C	1	26	0.050	1.3	5/16	8	7.3	3.3	25

*Material thickness includes PPA 571 coating – Base material thickness is 0.030"

C = COATED U = UNCOATED



CE



DNV-GL

BAND-FAST® Clamps

The low cost alternative to cable cleats



Introducing PPA Coated & Uncoated BAND-FAST® Clamps with captive clip from BAND-IT®

BENEFITS OF BAND-FAST® CLAMPS OVER CABLE CLEATS

- Up to 75% lower material cost
- Up to 3x faster to install – reduced labour costs
- Lower profile
- No additional fixings required
- Large diameter adjustment – reduced inventory
- Significant reduction in weight
- Easier handling & logistics



PPA Coated BAND-FAST® Clamps



PART NUMBER	WIDTH	BAND REF/MATERIAL	LENGTH (MM)	CLIP REF/MATERIAL	SINGLE WRAP OR DOUBLE WRAP	*MAX CABLE OD (Single cable config.)	*MAX CABLE OD (Trefoil cable config.)	*MAX CABLE OD (Quadrafoil cable config.)	PACK QTY PIECE	WEIGHT PER PIECE (KG)	**PASSED IEC61914:2015 Short circuit test in trefoil up to (KA PEAK)
LFAC-F1015M030-A900	15.88mm (5/8")	AE435 316 SS	300mm	AE455 316 SS	Single	40mm	13mm	12mm	100	0.025	50.8kA
LFAC-F1015M040-A900			400mm			75mm	28mm	25mm	100	0.030	
LFAC-F1015M050-A900			500mm			100mm	43mm	37mm	100	0.038	
LFAC-F1015M060-A900			600mm			130mm	57mm	50mm	100	0.045	
LFAC-F1015M070-A900			700mm			160mm	70mm	60mm	100	0.052	
LFCC-F1015M040-A900			LE155 316 SS	Double	400mm	40mm	13mm	12mm	100	0.030	76.3kA
LFCC-F1015M050-A900					500mm	55mm	21mm	18mm	100	0.038	
LFCC-F1015M060-A900					600mm	70mm	28mm	25mm	100	0.045	
LFCC-F1015M070-A900					700mm	85mm	35mm	31mm	100	0.052	
LFCC-F1015M080-A900					800mm	100mm	42mm	37mm	100	0.060	
LFCC-F1015M100-A900					1000mm	130mm	57mm	50mm	100	0.075	
LFCC-F1015M120-A900	1200mm	160mm			70mm	60mm	100	0.090			

*Note: Maximum cable OD are for a guide only.



C075

See pages 26-29 for full details on TOOLS and their specifications.



PPA coated band



BAND-FAST® Clamps

The low cost alternative to cable cleats



Independently tested to the latest Cable Cleat Standard IEC61914:2015 for resistance to electromechanical force.

Test reports available on request.

Other features of BAND-FAST® Clamps

- Low profile finish
- 316 grade stainless (0.38mm band thickness)
- PPA 571 coating (0.4mm coating thickness)
- Zero Halogen, low smoke & fume
- DNV and GL type approved materials
- Standard width 5/8" (15.88mm) – other widths available
- Standard colour black (other colours available upon request)
- Captive sealing clip
- Fully rounded edges / Round profile on end of band
- Improved health & safety during installation
- Reduced inventory – one size fits all
- No accessories required (fixing, liners, packers, studding, etc)
- Accommodates variations in cable diameter
- Reduced environmental impact during manufacture / transportation / decommissioning

Uncoated BAND-FAST® Clamps

installed with additional cushion sleeve



PART NUMBER	WIDTH	BAND REF/MATERIAL	LENGTH (MM)	BUCKLE REF/MATERIAL	SINGLE WRAP OR DOUBLE WRAP	*MAX CABLE OD (Single cable config.)	*MAX CABLE OD (Trefoil cable config.)	*MAX CABLE OD (Quadrafoil cable config.)	PACK QTY PIECE	WEIGHT PER PIECE (KG)	**PASSED IEC61914:2015 Short circuit test in trefoil up to (KA PEAK)
LFEC-F1030M050	15.88mm (5/8")	C405 316 SS	500mm	C455 316 SS	Double	55mm	21mm	18mm	100	0.062	112kA
LFEC-F1030M060			600mm			70mm	28mm	25mm	100	0.070	
LFEC-F1030M070			700mm			85mm	35mm	31mm	100	0.078	
LFEC-F1030M080			800mm			100mm	42mm	37mm	100	0.086	
LFEC-F1030M100			1000mm			130mm	57mm	50mm	100	0.103	
LFEC-F1030M120			1200mm			160mm	70mm	60mm	100	0.120	
LFEC-F1230M050	19.1mm (3/4")	C406 316 SS	500mm	C456 316 SS	Double	55mm	21mm	18mm	100	0.078	120kA
LFEC-F1230M060			600mm			70mm	28mm	25mm	100	0.088	
LFEC-F1230M070			700mm			85mm	35mm	31mm	100	0.098	
LFEC-F1230M080			800mm			100mm	42mm	37mm	100	0.108	
LFEC-F1230M100			1000mm			130mm	57mm	50mm	100	0.128	
LFEC-F1230M120			1200mm			160mm	70mm	60mm	100	0.150	

*Note: Maximum cable OD are for a guide only.



C001

See pages 26-29 for full details on TOOLS and their specifications.



Stainless Steel Cable Ties



Whether it is an offshore platform, ship, refinery, tunnel, bridge, power station or public building, BAND-IT® has the stainless steel cable tie to suit your application.

Quick reference of product features

	TIE-LOK®	BALL-LOK (Uncoated)	BALL-LOK (Coated)	BALL-LOK (Selectively coated)	MULTI-LOK (Uncoated)	MULTI-LOK (Coated)	BAND-IT® CABLE TIE (Uncoated)	BAND-IT® CABLE TIE (Coated)	BAND-FAST™ CLAMP
Available widths	4.5mm 6.35mm	4.6mm 7.9mm	4.6mm 7.9mm	4.6mm 7.9mm	7mm 12mm	7mm 12mm	6.35mm 9.53mm	6.35mm 9.53mm	9.53mm 12.7mm 15.88mm 19.05mm
304s/s (for general corrosion resistance)	●	●							●
316s/s (for superior corrosion resistance)	●	●	●	●	●	●	●	●	●
Uncoated	●	●			●		●		●
Epoxy Coated			●						
Nylon 11 Coated				●		●		○	
PPA 571 Coated								●	●
Black colour			●	●		●		●	●
Other colours available						○		○	○
Self Locking		●	●	●	●	●			
Releasable / reusable							●	●	
See page number...	18	16	16	17	15	15	14	14	11

● Standard

○ Contact BAND-IT for info



BAND-IT® Ties Coated & Uncoated



- Reusable tie
- Available in 6.35mm or 9.53mm widths
- 316 grade stainless steel
- Low Smoke, Zero Halogen PPA coated for superior corrosion resistance
- Thick coating protects cables & hands
- Fast, easy application
- Vibration proof
- Colours available upon request and are subject to a MOQ



AE200 / AE201 / C075 / or by hand

See pages 26-29 for full details on TOOLS and their specifications.

PPA571 coated 316 Stainless Steel BAND-IT® Tie

PART NUMBER	MATERIAL	WIDTH		LENGTH		PACKAGE WEIGHT		MAX DIAMETER SINGLE WRAP		MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
		IN	MM	IN	MM	LBS	KG	IN	MM		
AE111	316 SS	1/4	6.4	6	152	1.4	0.6	1.5	38	75/300**	100/Bag
AE112	316 SS	1/4	6.4	9	229	1.8	0.8	2.5	63	75/300**	100/Bag
AE113	316 SS	1/4	6.4	12	305	2.1	1.0	3.4	86	75/300**	100/Bag
AE114	316 SS	1/4	6.4	18	457	3.0	1.4	5.4	137	75/300**	100/Bag
AE115	316 SS	1/4	6.4	24	610	3.7	1.7	7.3	185	75/300**	100/Bag
AE311	316 SS	3/8	9.6	6	152	1.8	0.8	1.5	38	100/500**	100/Bag
AE312	316 SS	3/8	9.6	9	229	2.5	1.1	2.5	63	100/500**	100/Bag
AE313	316 SS	3/8	9.6	12	305	3.1	1.4	3.4	86	100/500**	100/Bag
AE314	316 SS	3/8	9.6	18	457	4.4	2.2	5.4	137	100/500**	100/Bag
AE315	316 SS	3/8	9.6	24	610	6.6	3.0	7.3	185	100/500**	100/Bag
AE316	316 SS	3/8	9.6	30	762	7.0	3.2	9.1	231	100/500**	100/Bag
AE317	316 SS	3/8	9.6	36	914	8.3	3.8	11.0	280	100/500**	100/Bag

**Single / Double Wrapped • Material thickness 0.045" (1.1mm) includes coating



DNV-GL



Uncoated 316 Stainless Steel BAND-IT® Tie

PART NUMBER	MATERIAL	WIDTH		LENGTH		PACKAGE WEIGHT		MAX DIAMETER SINGLE WRAP		MINIMUM LOOP TENSILE STRENGTH (LBS)	PACKAGE QUANTITY
		IN	MM	IN	MM	LBS	KGS	IN	MM		
AE101	316 SS	1/4	6.35	6	152	1.4	0.6	1.5	38	75/300**	100/Bag
AE102	316 SS	1/4	6.35	9	229	1.8	0.8	2.5	63	75/300**	100/Bag
AE103	316 SS	1/4	6.35	12	305	2.1	1.0	3.4	86	75/300**	100/Bag
AE104	316 SS	1/4	6.35	18	457	3.0	1.4	5.4	137	75/300**	100/Bag
AE105	316 SS	1/4	6.35	24	610	3.7	1.7	7.3	185	75/300**	100/Bag
AE301	316 SS	3/8	9.53	6	152	1.8	0.8	1.5	38	100/500**	100/Bag
AE302	316 SS	3/8	9.53	9	229	2.5	1.1	2.5	63	100/500**	100/Bag
AE303	316 SS	3/8	9.53	12	305	3.1	1.4	3.4	86	100/500**	100/Bag
AE304	316 SS	3/8	9.53	18	457	4.4	2.0	5.4	137	100/500**	100/Bag
AE305	316 SS	3/8	9.53	24	610	6.6	3.0	7.3	185	100/500**	100/Bag
AE306	316 SS	3/8	9.53	30	762	7.0	3.2	9.1	231	100/500**	100/Bag
AE307	316 SS	3/8	9.53	36	914	8.3	3.8	11.0	280	100/500**	100/Bag

**Single / Double Wrapped



Multi-Lok Ties



A high strength, vibration resistant tie. This product is a perfect choice for harsh duty or marine environments.

- Self-locking ties
- 316 stainless steel
- Uncoated or nylon coated versions available
- Two widths – 7mm and 12mm
- Install by hand or with a variety of tools
- Unique high strength multiple locking system
- Vibration proof



M503 / KE922 / AE200 / AE201

See pages 26-29 for full details on TOOLS and their specifications.



Multi-Lok Ties – Coated

PART NUMBER	MATERIAL	WIDTH		LENGTH		PACKAGED WEIGHT		MAX. DIAMETER SINGLE WRAP		MIN. LOOP TENSILE STRENGTH (LBS)	PACKAGE QTY
		IN	MM	IN	MM	LBS	KGS	IN	MM		
AE611	316 SS	0.276	7.0	6.0	150	0.7	0.3	1.3	33	250	100/Bag
AE612	316 SS	0.276	7.0	9.0	225	0.9	0.5	2.2	57	250	100/Bag
AE613	316 SS	0.276	7.0	12.0	300	1.3	0.6	3.2	81	250	100/Bag
AE614	316 SS	0.276	7.0	18.0	450	1.8	0.8	5.1	129	250	100/Bag
AE615	316 SS	0.276	7.0	24.0	610	2.6	1.2	7.1	180	250	100/Bag
AE711	316 SS	0.472	12.0	6.0	150	1.1	0.5	1.3	33	415	100/Bag
AE712	316 SS	0.472	12.0	9.0	225	1.7	0.8	2.2	57	415	100/Bag
AE713	316 SS	0.472	12.0	12.0	300	2.2	1.0	3.2	81	415	100/Bag
AE714	316 SS	0.472	12.0	18.0	450	3.0	1.4	5.1	129	415	100/Bag
AE715	316 SS	0.472	12.0	24.0	610	4.3	2.0	7.1	180	415	100/Bag



Multi-Lok Ties – Uncoated

PART NUMBER	MATERIAL	WIDTH		LENGTH		PACKAGED WEIGHT		MAX. DIAMETER SINGLE WRAP		MIN. LOOP TENSILE STRENGTH (LBS)	PACKAGE QTY
		IN	MM	IN	MM	LBS	KGS	IN	MM		
AE601	316 SS	0.276	7.0	6.0	150	0.7	0.3	1.3	33	250	100/Bag
AE602	316 SS	0.276	7.0	9.0	225	0.9	0.5	2.2	57	250	100/Bag
AE603	316 SS	0.276	7.0	12.0	300	1.3	0.6	3.2	81	250	100/Bag
AE604	316 SS	0.276	7.0	18.0	450	1.8	0.8	5.1	129	250	100/Bag
AE605	316 SS	0.276	7.0	24.0	610	2.6	1.2	7.1	180	250	100/Bag
AE701	316 SS	0.472	12.0	6.0	150	1.1	0.5	1.3	33	415	100/Bag
AE702	316 SS	0.472	12.0	9.0	225	1.7	0.8	2.2	57	415	100/Bag
AE703	316 SS	0.472	12.0	12.0	300	2.2	1.0	3.2	81	415	100/Bag
AE704	316 SS	0.472	12.0	18.0	450	3.0	1.4	5.1	129	415	100/Bag
AE705	316 SS	0.472	12.0	24.0	610	4.3	2.0	7.1	180	415	100/Bag



Ball-Lok Ties



Quick and easy to apply, Ball-Lok ties offer a versatile and economical solution for most environments.

- BAND-IT Ball-Lok Ties installs with tools to ensure uniform tension and clean tail cut-off for safe handling. Its self locking design allows for fast installation and comes in two widths - 0.18" (4.6mm) and 0.31" (7.9mm)
- Available in Type 304 and Type 316 stainless steels to provide good to excellent corrosion resistance in a wide variety of environments
- Uncoated or coated with black, halogen free epoxy
- Loop tensile strengths range from 150 to 300 pounds

Ball-Lok Ties 304 and 316 Stainless Steel • Pack Qty – 100 (bag)


PART NUMBER 304 SS	PART NUMBER 316 SS	MAX BUNDLE DIAMETER		APPROXIMATE LENGTH		APPROXIMATE WIDTH		APPROXIMATE WEIGHT		MINIMUM LOOP TENSILE STRENGTH	
		IN	MM	IN	MM	IN	MM	LBS	KGS	LBS	N
KE1118	KE0118	1.2	30	5.9	150	0.18	4.6	0.42	0.19	200	890
KE1128	KE0128	2.0	50	7.9	201	0.18	4.6	0.57	0.26	200	890
KE1138	KE0138	2.7	69	10.2	259	0.18	4.6	0.70	0.32	200	890
KE1148	KE0148	4.0	102	14.2	360	0.18	4.6	0.92	0.42	200	890
KE1158	KE0158	6.0	152	20.4	520	0.18	4.6	1.32	0.60	200	890
KE1168	KE0168	8.0	203	26.8	679	0.18	4.6	1.76	0.80	200	890
KE1178	KE0178	10.0	254	33.0	838	0.18	4.6	2.07	0.94	200	890
KE1188	KE0188	12.0	305	42.0	1067	0.18	4.6	2.38	1.08	200	890
KE1328	KE0328	2.0	50	7.9	201	0.31	7.9	0.99	0.45	300	1335
KE1338	KE0338	2.7	69	10.2	259	0.31	7.9	1.32	0.60	300	1335
KE1348	KE0348	4.0	102	14.2	360	0.31	7.9	1.67	0.76	300	1335
KE1358	KE0358	6.0	152	20.4	520	0.31	7.9	2.23	1.04	300	1335
KE1368	KE0368	8.0	203	26.8	679	0.31	7.9	2.86	1.30	300	1335
KE1378	KE0378	10.0	254	33.0	838	0.31	7.9	3.52	1.60	300	1335
KE1388	KE0388	12.0	305	42.0	1067	0.31	7.9	4.62	2.10	300	1335
-	● KE0218	1.2	30	5.9	150	0.18	4.6	0.46	0.21	150	668
-	● KE0228	2.0	50	7.9	201	0.18	4.6	0.62	0.28	150	668
-	● KE0238	2.7	69	10.2	259	0.18	4.6	0.75	0.34	150	668
-	● KE0248	4.0	102	14.2	360	0.18	4.6	1.01	0.46	150	668
-	● KE0258	6.0	152	20.4	520	0.18	4.6	1.41	0.64	150	668
-	● KE0268	8.0	203	26.8	679	0.18	4.6	1.80	0.82	150	668
-	● KE0278	10.0	254	33.0	838	0.18	4.6	2.33	1.06	150	668
-	● KE0428	2.0	50	7.9	201	0.31	7.9	1.16	0.53	175	780
-	● KE0438	2.7	69	10.2	259	0.31	7.9	1.50	0.68	175	780
-	● KE0448	4.0	102	14.2	360	0.31	7.9	1.78	0.81	175	780
-	● KE0458	6.0	152	20.4	520	0.31	7.9	2.46	1.12	175	780
-	● KE0468	8.0	203	26.8	679	0.31	7.9	3.17	1.44	175	780
-	● KE0478	10.0	254	33.0	838	0.31	7.9	3.83	1.74	175	780

● COATED ○ UNCOATED



KE922 / K502 / or by hand

See pages 26-29 for full details on TOOLS and their specifications.



304

316



DNV-GL



DNV-GL



Selectively Coated Ball-Lok Ties



Manufactured in the UK from 316 SS, the selectively coated Ball-Lok ties offer the same benefits as the full coated version but is ideal where Nylon 11 coating is required.

- Self locking operation for fast, easy application
- Two widths – 4.6mm & 7.9mm
- 316 Stainless steel with Nylon 11 coating
- Corrosion, UV and weather resistant
- Smooth inside diameter
- Zero halogen, low smoke



K502 / KE922

See pages 26-29 for full details on TOOLS and their specifications.



316 Stainless Steel Selectively Coated Ball-Lok Ties Pack Qty – 100 (bag)

PART NUMBER	MAX. BUNDLE DIAMETER		APPROX LENGTH		APPROX WIDTH		APPROX WEIGHT PER 100		MIN. LOOP TENSILE STRENGTH	
	INCH	MM	INCH	MM	INCH	MM	LBS	KGS	LBS	N
KE0618	1.2	30	5.9	150	0.18	4.6	0.55	0.25	100	445
KE0628	2.0	50	7.9	201			0.62	0.28		
KE0638	2.7	69	10.2	259			0.75	0.34		
KE0648	4.0	102	14.2	360			1.01	0.46		
KE0658	6.0	152	20.4	520			1.41	0.64		
KE0668	8.0	203	26.8	679			1.80	0.82		
KE0678	10.0	254	33.0	838			2.33	1.06		
KE0818	1.2	30	5.9	150	0.31	7.9	1.02	0.46	120	534
KE0828	2.0	50	7.9	201			1.16	0.53		
KE0838	2.7	69	10.2	259			1.50	0.68		
KE0848	4.0	102	14.2	360			1.78	0.81		
KE0858	6.0	152	20.4	520			2.46	1.12		
KE0868	8.0	203	26.8	679			3.17	1.44		
KE0878	10.0	254	33.0	838			3.83	1.74		



Tie-Lok® Ties



BAND-IT® Tie-Lok® ties offer a unique, dimple lock with a smooth ID and a low profile.

This clamp provides fast, consistent and reliable clamping tension. Used in many industries such as automotive, cable bundling and identification.

- Locks under full tension – no slip-back
- Low profile buckle
- A strong patented dimple lock
- Available in 6.35mm or 4.5mm widths
- Available in 304 or 316 grade stainless steel options
- Great for cable bundling or ID attachment



A920 (Tie-Lok) / A910 (Mini Tie-Lok) / A940 (Ultra Lok)

See pages 26-29 for full details on TOOLS and their specifications.

Tie-Lok® Ties

PART NUMBER	MATERIAL	WIDTH		LENGTH		PACKAGE WEIGHT		MAX DIAMETER SINGLE WRAP		MINIMUM LOOP TENSILE STRENGTH	PACKAGE QTY
		IN	MM	IN	MM	LBS	KG	IN	MM	LBS	BAGS
AS211	304 SS	0.25	6.4	10	254	1.2	0.6	2	51	250	100
AS212	304 SS	0.25	6.4	16.5	419	1.8	0.9	4	101	250	100
AS213	304 SS	0.25	6.4	22.5	572	2.6	1.2	6	152	250	100
AS214	304 SS	0.25	6.4	29	737	3.3	1.5	8	203	250	100
AS215	304 SS	0.25	6.4	35	889	3.9	1.8	10	254	250	100
AS411	316 SS	0.25	6.4	10	254	1.2	0.6	2	21	250	100
AS412	316 SS	0.25	6.4	16.5	419	1.8	0.9	4	101	250	100
AS413	316 SS	0.25	6.4	22.5	572	2.6	1.2	6	152	250	100
AS414	316 SS	0.25	6.4	29	737	3.3	1.5	8	203	250	100
AS415	316 SS	0.25	6.4	35	889	3.9	1.8	10	254	250	100



DNV-GL



Mini Tie-Lok® Ties

PART NUMBER	MATERIAL	WIDTH		LENGTH		PACKAGE WEIGHT		MAX DIAMETER SINGLE WRAP		MINIMUM LOOP TENSILE STRENGTH	PACKAGE QTY
		IN	MM	IN	MM	LBS	KGS	IN	MM	LBS	BAGS
AS221	304 SS	0.177	4.5	7	165	0.7	0.38	1	21	100	100
AS222	304 SS	0.177	4.5	10	254	0.9	0.38	2	51	100	100
AS223	304 SS	0.177	4.5	16	419	1.4	0.38	4	102	100	100
AS224	304 SS	0.177	4.5	22.5	572	1.9	0.38	6	152	100	100
AS225	304 SS	0.177	4.5	29	737	2.4	0.38	8	203	100	100
AS421	316 SS	0.177	4.5	7	165	0.7	0.38	1	25	100	100
AS422	316 SS	0.177	4.5	10	254	0.9	0.38	2	51	100	100
AS423	316 SS	0.177	4.5	16	419	1.4	0.38	4	102	100	100
AS424	316 SS	0.177	4.5	22.5	572	1.9	0.38	6	152	100	100
AS425	316 SS	0.177	4.5	29	737	2.4	0.38	8	203	100	100



DNV-GL



Stainless Steel Embossing Systems



Stainless Steel Tape Embossing System

With the portable tape embossing tool and a roll of 304 stainless steel tape, you can quickly and easily produce I.D. tags with 3/16" letter size which can be attached with your choice of BAND-IT® ties. Can be used to produce imprinted or embossed tags.

Replacement Rolls: ID405 – 1/2" X 21' – 1 pack.



Stainless Steel Embossing System

Pack Qty – 1

PART NUMBER	DESCRIPTION	WEIGHT	
		LBS	KGS
ID400	Stainless Steel Tape Embossing Tool (includes two rolls of SS tape ID405)	2.6	1.2
ID405	304 SS Tape Roll for Embossing Tool, 1/2" x 21' x 0.005"	0.4	0.2



ID400



ID405


Customised Embossed Tags

PART NUMBER	WIDTH		NO. OF CHARACTERS
	IN	MM	
AE487	0.38	10	1-10
AE488	0.38	10	11-20
AE489	0.38	10	21-30
AE480	0.38	10	Blank

- 10mm wide x 0.25mm thick 316 stainless steel
- Pre-embossed with 6mm high text to customer requirements
- Low cost and quick to install
- Blank version (100mm) also available (AE480)



AE480 (100mm blank)

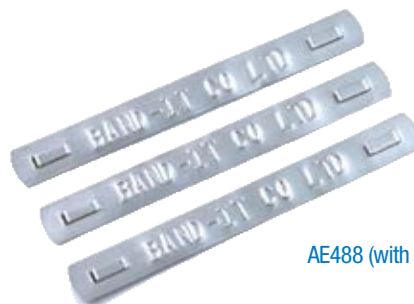

AE488 (with 14 character)



Easy Read Identification

EASY-Read Characters


PART NUMBER	DESCRIPTION	PACKAGE WEIGHT	
		LBS	KGS
AE010	EASY A	0.31	0.14
AE011	EASY B		
AE012	EASY C		
AE013	EASY D		
AE014	EASY E		
AE015	EASY F		
AE016	EASY G		
AE017	EASY H		
AE018	EASY I, 1		
AE019	EASY J		
AE020	EASY K		
AE021	EASY L, 7		
AE022	EASY M, W		
AE023	EASY N		
AE024	EASY O		
AE025	EASY P		
AE026	EASY Q		
AE027	EASY R		
AE028	EASY S		
AE029	EASY T		
AE030	EASY U		
AE031	EASY V		
AE032	EASY X		
AE033	EASY Y		
AE034	EASY Z.		
AE037	EASY 2		
AE038	EASY 3		
AE039	EASY 4		
AE040	EASY 5		
AE041	EASY 6, 9		
AE042	EASY 8		
AE035	EASY Minus/Hyphen		
AE036	EASY Blank		
AE046	EASY Plus +		
AE047	EASY Earth ±		
AE048	EASY Sine ~		
AE049	EASY Slash /		

A complete range of individual letters, numbers and symbols that clearly identifies in any environment.

- BAND-IT EASY READ letters, numbers and symbols made from type 316SS
- EASY READ characters slide onto carriers/strips or any 3/8" wide tie/band
- Easy to read in dim light and inaccessible places
- Slide directly onto cable ties to create a self-contained wrap tag
- Characters sold individually in bags of 100 pieces



AE060 Easy-Read Kit



Easy Read Kit

PART NUMBER	DESCRIPTION	WEIGHT	
		LBS	KGS
AE060	Kit contains 100 of each character/carrier/strip	23.8	10.8

Easy Read Identification

Carriers & Strips Pack Qty – 100 • 316 grade SS

PART NUMBER	DESCRIPTION	WIDTH		LENGTH		WEIGHT	
		IN	MM	IN	MM	LBS	KGS
AE043	EASY CARRIER 6	0.38	10	3.6	93	0.8	0.4
AE044	EASY CARRIER 10	0.38	10	5.1	131	1.3	0.6
AE045	EASY CARRIER 16	0.38	10	7.3	188	1.5	0.7
AE050	EASY STRIP BLACK	0.38	10	4.2	108	1.0	0.5
AE051	EASY STRIP BLACK	0.38	10	5.7	146	1.4	0.6
AE052	EASY STRIP BLACK	0.38	10	8.0	203	1.9	0.9

EASY CARRIERS are coated in black Nylon 11 as standard.
 EASY STRIPS are coated in black PPA571 as standard.



An assortment of blank ID tags to use with the ID Tagging System. Also, includes various Tie-Lok® ties and Tie-Lok® tool for tag fastening.

- Package Weight: 22.7 Lbs (10.3 Kg)
- Kit Contains: 1 x A9207, 2 x ID100, 1 x ID101, 1 x ID102, 1 x AS211, 2 x AS212, 1 x AS213.

ID3009 ID Kit

PART NUMBER	DESCRIPTION	WEIGHT	
		LBS	KGS
ID300	Handy Kit contains one Tie-Lok Tool plus:	22.7	10.3
ID100	200 pcs. I.D. Tags ¾" x 2" (19.05 x 51mm)		
ID101	100 pcs. I.D. Tags 1½" x 2½" (38.1 x 63mm)		
ID102	100 pcs. I.D. Tags ¾" x 3½" (19.05 x 89mm)		
AS211	100 pcs. Tie-Loks ¼" x 10" (6.35 x 254mm)		
AS212	200 pcs. Tie-Loks ¼" x 16.5" (6.35 x 419mm)		
AS213	100 pcs. Tie-Loks ¼" x 22.5" (6.35 x 572mm)		



ID300 ID Kit



ID Tags & Systems

A range of ID tag systems manufactured from corrosion resistant 304 and 316 grade stainless steels.

All BAND-IT® products are de-burred to eliminate sharp edges and damage to cables, etc.

ID Tags Pack Qty – 100

PART NUMBER 304SS	PART NUMBER 316SS	THICKNESS		WIDTH		LENGTH		PACKAGE WEIGHT	
		IN	MM	IN	MM	IN	MM	LBS	KGS
ID100	ID440	0.010	0.254	0.75	19.05	2.0	51	0.5	0.22
ID101	ID441	0.015	0.381	1.50	38.10	2.5	63	1.2	0.55
ID102	ID442	0.015	0.381	0.75	19.05	3.5	89	0.8	0.36

Print your own tags on 304 or 316 stainless steel and apply with Tie-Lok® Ties. Tag imprinter is available with a choice of character sizes. Imprinter with character wheel weighs 29.5 Lbs (13.4 Kg).

- 3 tag sizes available
- 304 and 316 grade stainless steel available
- Supplied blank for customers to engrave/imprint
- Custom embossing service available – contact BAND-IT®



- Use to imprint ID tags with single or multiple lines of text
- Bench mounted manual imprinter
- Character sizes 1.59mm, 2.38mm, 3.18mm, 4.76mm or 6.35mm available

ID Tag Imprinter Tool

PART NUMBER	TOOL SUPPLIED WITH	WEIGHT	
		LBS	KGS
ID200	3/32" character wheel (2.38mm)	29.5	13.4
ID202	1/16" character wheel (1.59mm)	29.5	13.4
ID203	1/8" character wheel (3.18mm)	29.5	13.4
ID204	3/16" character wheel (4.76mm)	29.5	13.4
ID205	1/4" character wheel (6.35mm)	29.5	13.4



Optional Letter Dial Kits

PART NUMBER	TOOL SUPPLIED WITH	WEIGHT	
		LBS	KGS
ID281	1/16" character wheel (1.59mm)	2.09	0.95
ID282	1/8" character wheel (3.18mm)	2.09	0.95
ID283	3/16" character wheel (4.76mm)	2.09	0.95
ID284	1/4" character wheel (6.35mm)	2.09	0.95
ID290	3/32" character wheel (2.38mm)	2.09	0.95



ID285 ID Guide Accessory

Fixture that enables imprinting on Stainless Steel Bands up to 3/4" x 0.030" • Weight: 0.5 Lbs (0.2 Kg)



Mounting Brack-Its™



Mounting Hardware

Used to mount traffic signs, security devices and enclosures.

- 201 grade stainless steel for superior strength
- Withstands stress and wind vibration with specially designed reinforcement ribs
- Convenient attachment methods
- Hex head bolts with metal & fibre washer, no nuts required
- Applied with BAND-IT® banding products or Ultra-Lok™ free end clamps



C001 / C075 / C400 / UL4000 / UL9010

See pages 26-29 for full details on TOOLS and their specifications.

1 Bolt Straight Leg Brack-It

Thickness 0.070"(1.8mm) • Pack Qty – 50

PART NUMBER	DESCRIPTION	WEIGHT	
		LBS	KGS
D001	Stainless Steel with S.S. Bolt, Washer and Fibre washer	7.3	3.3
D004	Stainless Steel, no bolt or washer	5.9	2.7

For band widths up to 3/4" (19.05mm)



D001

1 Bolt Flared Leg Brack-It

Thickness 0.070"(1.8mm) • Pack Qty – 50

PART NUMBER	DESCRIPTION	WEIGHT	
		LBS	KGS
D021	Stainless Steel with S.S. Bolt, and Washer	7.6	3.5
D022	Stainless Steel, no bolt or washer	6.0	2.7

For band widths up to 3/4" (19.05mm)



D021

2 Bolt Brack-It Thickness 0.070"(1.8mm) • Pack Qty – 50

PART NUMBER	DESCRIPTION	WEIGHT	
		LBS	KGS
D008	Stainless Steel with S.S. Bolt, Washer and Fibre washer	9.6	4.4
D009	Stainless Steel, no bolt or washer	7.1	3.2

For band widths up to 3/4" (19.05mm)



D008

Bolts and Washers for Brack-It Pack Qty – 50

PART NUMBER	DESCRIPTION	WEIGHT	
		LBS	KGS
D002	S.S. Bolts for Stainless Brack-its M8 x 20 Long Hex Head	1.25	0.57
D003	Fibre washers	0.06	0.03



D003

D002

Mini Brack-Its Stainless Steel Pack Qty – 50

PART NUMBER	DESCRIPTION	WEIGHT	
		LBS	KGS
D310	Flared Leg with SS Bolt, Fibre Washer, 1/2" (12.7mm) Slot	3.2	1.5
D315	Straight Leg with SS Bolt, Fibre Washer, 1/2" (12.7mm) Slot	3.3	1.5
D302	Replacement Bolts - SS Bolt M8 x 12 Hex head	0.75	0.34

For band widths up to 1/2" (12.7mm)



D315

D310



Mounting Brack-Its™

Y Brack-Its

Bracket width 1.5" (38mm) • Pack Qty – 50

PART NUMBER	LENGTH		HOLE DIA.		HOLE CENTRES		BAND WIDTH	
	IN	MM	IN	MM	IN	MM	IN	MM
DE096	2	51	0.311	7.9	0.75	19	0.75	19.05
DE097	4	102	0.311	7.9	1.48	37.5	0.75	19.05



DE096 / DE097

Valmount Brack-Its

Pack Qty – 50

PART NUMBER	LENGTH		HOLE DIA.		HOLE CENTRES		BAND WIDTH	
	IN	MM	IN	MM	IN	MM	IN	MM
D025	5.6	142	0.375	9	1.5	38	0.75	19.05
D026	3.6	91	0.375	9	1.5	38	0.75	19.05



D025 / D026

Super Valmount Brack-Its

Pack Qty – 50

PART NUMBER	LENGTH		HOLE DIA.		HOLE CENTRES		BAND WIDTH	
	IN	MM	IN	MM	IN	MM	IN	MM
MR190	7.9	200	0.375	9	1.5	38	0.75	19.05



MR190

Nameplate Brack-Its

Pack Qty – 50

PART NUMBER	LENGTH		HOLE DIA.		HOLE CENTRES		BAND WIDTH	
	IN	MM	IN	MM	IN	MM	IN	MM
DE0209	1.6	42	0.2	5	1.5	38	0.5	12.7



DE0209

Hand Tools

AE201 Tensioning Hook



Use with BAND-IT® Ties / Multi-Lok Ties to tension cable ties.

AE200 Cable Tie Tensioner



Use with BAND-IT® Ties / Multi-Lok Ties to tension cable ties.

A910 Mini Tie-Lok II Tool



For applying 4.5mm wide smooth ID Mini Tie-Lok® ties for cable bundling and identification tagging. Forms unique dimple lock with a strong locking force and cuts off the excess band flush with top of buckle so the completed lock is smooth and not sharp.

- Forms dimple lock with a loop tensile strength in excess of 100 pounds (445N)
- Adjustable controlled tension with repeatable results
- Easy to use, lightweight, compact design

A920 Tie-Lok® II Tool



Applies 6.35mm wide smooth ID Tie-Lok® ties used in cable bundling and identification tagging. Locks tie with the patented Tie-Lok® and cuts off excess band flush with top of buckle so the completed lock is smooth and not sharp.

- Forms dimple lock with a loop tensile strength in excess of 250 pounds (890N)
- Adjustable controlled tension with repeatable results
- Easy to use, lightweight, compact design

A940 ULTRA-LOK® Tool



Applies 6.35mm wide Smooth ID Tie-Lok® ties. Locks tie with patented Ultra-Lok® cut-off for increased loop tensile strength in excess of 400Lbs (1776N).



C001 BAND-IT® Tool



For use on band widths of 3/16" to 3/4". Comes with a spin handle retaining ring to keep parts intact.

- Able to tension over 2,400 Lbs of force and cuts off the tail of the clamp being formed
- Used to apply BAND-IT® Uncoated Stainless Steel Band
- Drop forged tool with built in cutter
- Spring loaded gripper lever improves ease of use
- Blue epoxy powder coated finish resists corrosive elements

C075 Bantam Tool



BAND-IT® Bantam tool is a compact, lightweight, ratchet action tool with built in cutter.

- 3 way handle adjusts for one or two-handed tensioning
- Zinc plated for corrosion resistance
- Useful in tight areas with minimal access
- Designed for easy loading and removing of material
- Use with coated and uncoated BAND-IT® ties, Coated Band, Coated BAND-FAST® or Valustrap up to 19mm wide

C400 Ratchet Tool



Heavy duty tensioner for 3/8" to 3/4" stainless steel in thickness up to 0.030". Highly portable, fast, reliable ratchet type tool. For sign hanging, insulation work and other banding applications.

- Tensions and cuts off the tail of the clamp being formed
- Used to apply BAND-IT® Stainless steel bands
- Designed for easy loading and removing of material
- Tool for use with medium strength applications

Hand Tools

J075 Thriftool®



Use with 1/2" wrench to tension. Uncoated band up to 3/8" wide. Does not contain a built in cutter.

J020 Pok-It II Tool



Lightweight pocket sized ratchet tool. Use to tension uncoated band up to 3/8" wide. Incorporates cutter lever.

K502 Ball-Lok Tool



Install Ball-Lok stainless steel ties (up to 7.9mm wide) quickly and easily with the lightweight, portable Ball-Lok tool with adjustable tension, side loading and automatic tail cut-off.

KE922 Tensioning Tool



Tensions and cuts off Ball-Lok and Multi-Lok ties up to 12mm wide regardless of material or coating. Incorporates a manual cut off lever.

M503 Multi-Lok Hand Tool



Quickly, easily and consistently applies any size Multi-Lok ties. Simply adjust the Multi-Lok tool for the desired tension, side load the tie into the tool and squeeze the handle. When the proper tension is reached, the Multi-Lok tool automatically cuts the tail off close to the buckle.

Power Tools

UL4000 Cordless Tool



- Fully portable battery operation
- Adjustable speed and torque
- Consistent application tensioning
- Applies both widths of Ultra-Lok Free-End Clamp*
- One person operation
- Weight 3.88 Lbs (8.56 Kgs)

UL9010 Electric Tool



- Adjustable speed and torque
- Consistent application tensioning
- Applies both widths of Ultra-Lok Free-End Clamp*
- No roll-up of hose required
- One person operation
- Weight 4.3 Lbs (9.48 Kgs)

*1/2" Ultra-Lok clamps require M09387 shear plate fitted to tool

Tool weights

PART NUMBER	DESCRIPTION	TOOL WEIGHT		PACKAGE WEIGHT	
		Kgs	Lbs	Kgs	Lbs
AE201	Tensioning hook	0.02	0.04	0.02	0.04
AE200	Cable tie tensioner	0.26	0.57	0.32	0.71
A910	Mini Tie-Lok II tool	0.54	1.19	0.58	1.28
A920	Tie-Lok II tool	0.54	1.19	0.58	1.28
A940	Ultra-Lok tool	0.54	1.19	0.58	1.28
C001	Band-it tool	1.86	4.10	2.02	4.45
C075	Bantam tool	1.04	2.29	1.18	2.60
C400	Ratchet tool	1.44	3.18	1.52	3.35
J057	Thrifttool	0.26	0.57	0.26	0.57
J020	Pok-It II tool	0.4	0.88	0.48	1.06
K502	Ball-Lok tool	0.54	1.19	0.58	1.28
KE922	Tensioning tool	0.56	1.23	0.64	1.41
M503	Multi-Lok hand tool	0.54	1.19	0.58	1.28
UL4000	Cordless tool	3.88	8.56	10.04	22.14
UL9010	Electric Tool	4.3	9.48	6.02	13.27

Index

Part Number	Page						
A910	26	AE051	22	AE456	10	AE935	10
A920	26	AE052	22	AE465	12	AE936	10
A940	26	AE060	21	AE466	12	AS211	19
AE010	21	AE101	15	AE467	12	AS212	19
AE011	21	AE102	15	AE475	12	AS213	19
AE012	21	AE103	15	AE476	12	AS214	19
AE013	21	AE104	15	AE477	12	AS215	19
AE014	21	AE105	15	AE480	19	AS221	19
AE015	21	AE111	15	AE487	19	AS225	19
AE016	21	AE112	15	AE488	19	AS411	19
AE017	21	AE113	15	AE489	19	AS412	19
AE018	21	AE114	15	AE505	11	AS413	19
AE019	21	AE115	15	AE506	11	AS414	19
AE020	21	AE200	26	AE507	11	AS415	19
AE021	21	AE201	26	AE565	11	AS421	19
AE022	21	AE301	15	AE566	11	AS425	19
AE023	21	AE302	15	AE567	11	C001	27
AE024	21	AE303	15	AE575	11	C075	27
AE025	21	AE304	15	AE576	11	C123	8
AE026	21	AE305	15	AE577	11	C124	8
AE027	21	AE306	15	AE601	16	C125	8
AE028	21	AE307	15	AE602	16	C126	8
AE029	21	AE311	15	AE603	16	C133	8
AE030	21	AE312	15	AE604	16	C134	8
AE031	21	AE313	15	AE605	16	C135	8
AE032	21	AE314	15	AE611	16	C136	8
AE033	21	AE315	15	AE612	16	C153	8
AE034	21	AE316	15	AE613	16	C154	8
AE035	21	AE317	15	AE614	16	C155	8
AE036	21	AE405	11	AE615	16	C156	8
AE037	21	AE406	11	AE701	16	C161	8
AE038	21	AE407	11	AE702	16	C171	8
AE039	21	AE425	11	AE703	16	C181	8
AE040	21	AE426	11	AE704	16	C191	8
AE041	21	AE427	11	AE705	16	C202	6
AE042	21	AE432	10	AE711	16	C203	6
AE043	22	AE433	10	AE712	16	C203Y	6
AE044	22	AE434	10	AE713	16	C204	6
AE045	22	AE435	10	AE714	16	C204B	6
AE046	21	AE436	10	AE715	16	C205	6
AE047	21	AE452	10	AE933	10	C205G	6
AE048	21	AE453	10	AE933	10	C206	6
AE049	21	AE454	10	AE934	10	C206R	6
AE050	22	AE455	10	AE934	10	C252	6



Part Number	Page						
C253	6	ID102	22	KE0438	17	LFEC-F1015M070-A900	12
C254	6	ID1029	21	KE0448	17	LFEC-F1015M080-A900	12
C255	6	ID2006	22	KE0458	17	LFEC-F1015M100-A900	12
C256	6	ID2026	22	KE0468	17	LFEC-F1030M050	13
C400	27	ID2036	22	KE0478	17	LFEC-F1030M060	13
C403	6	ID2046	22	KE0618	18	LFEC-F1030M070	13
C403Y	6	ID2056	22	KE0628	18	LFEC-F1030M080	13
C404	6	ID2816	22	KE0638	18	LFEC-F1030M100	13
C404B	6	ID2826	22	KE0648	18	LFEC-F1030M120	13
C405	6	ID2836	22	KE0658	18	LFEC-F1230M050	13
C405G	6	ID2846	22	KE0668	18	LFEC-F1230M060	13
C406	6	ID2859	22	KE0678	18	LFEC-F1230M070	13
C406R	6	ID2906	22	KE0818	18	LFEC-F1230M080	13
C453	6	ID3009	21	KE0828	18	LFEC-F1230M100	13
C454	6	ID4002	19	KE0838	18	LFEC-F1230M120	13
C455	6	ID4059	19	KE0848	18	M503	28
C456	6	ID440	22	KE0858	18	MR190	25
C923	7	ID441	22	KE0868	18	UB254	9
C923Y	7	ID442	22	KE0878	18	UB256	9
C924	7	J020	28	KE1118	17	UL1018	9
C924B	7	J075	28	KE1128	17	UL1024	9
C925	7	K502	28	KE1138	17	UL1028	9
C925G	7	KE0118	17	KE1148	17	UL1032	9
C926	7	KE0128	17	KE1158	17	UL1036	9
C926R	7	KE0138	17	KE1168	17	UL1046	9
C953	7	KE0148	17	KE1178	17	UL1056	9
C954	7	KE0158	17	KE1188	17	UL1070	9
C955	7	KE0168	17	KE1328	17	UL1086	9
C956	7	KE0178	17	KE1338	17	UL1096	9
D001	24	KE0188	17	KE1348	17	UL1106	9
D002	24	KE0218	17	KE1358	17	UL1116	9
D003	24	KE0238	17	KE1368	17	UL2030	9
D004	24	KE0248	17	KE1378	17	UL2042	9
D021	24	KE0258	17	KE1388	17	UL2060	9
D022	24	KE0268	17	KE922	28	UL2084	9
D302	24	KE0278	17	LFAC-F1015M030-A900	12	UL2120	9
D310	24	KE0328	17	LFAC-F1015M040-A900	12	UL4000	29
D315	24	KE0338	17	LFAC-F1015M050-A900	12	UL9010	29
DE0209	25	KE0348	17	LFAC-F1015M060-A900	12		
DE096	25	KE0358	17	LFAC-F1015M070-A900	12		
DE097	25	KE0368	17	LFEC-F1015M030-A900	12		
ID100	22	KE0378	17	LFEC-F1015M040-A900	12		
ID101	22	KE0388	17	LFEC-F1015M050-A900	12		
ID1019	21	KE0428	17	LFEC-F1015M060-A900	12		

BAND-IT[®]

***More Clamps
More Markets
More Solutions!***

*Aerospace
Automotive
Cable TV
Coal & Power
Construction
Electrical
General Fastening
Government
Oil & Gas
Marine
Military
Mining
Municipal
Petrochemical
Pole & Signal Mounting
Ship Building
Solar
Sub Sea
Telecommunications
Traffic
Transportation
Utility*



Distributed by:

IDEX

©2017 BAND-IT—IDEX
ALL RIGHTS RESERVED
B81UK 07/2017

www.band-it-idex.eu