

RA FAMILY

Industry-Leading Arm® Cortex®-M Family,
Delivering the Ultimate Promise of Security,
Connectivity and Intelligent IoT



INTRODUCING THE RA FAMILY

Delivering the Ultimate Promise of IoT with Software Flexibility



CONTENT

RA Family Overview	04
Target Applications	05
RA2 Series	06
RA4 Series	07
RA6 Series	08
Functional Safety, IEC 60730, and Security	09
Flexible Software Package	10
Development Environment	11
Development Boards	12
RA Partners	13
RA Family Selection Guide	14



Strong Security

- Secure Crypto Engine (SCE) IP
- An extra level of embedded hardware security providing tamper detection and resistance to side-channel attacks
- Integrated Arm® v8-M TrustZone®



Arm Core

- Based on Arm's next-generation Cortex-M23/M33 processor cores and Cortex-M4 core



Flexible Software Solution

- Supported by an open and flexible ecosystem concept, the Flexible Software Package (FSP)
- Can be replaced and expanded by any other RTOS or middleware



Best-in-Class Peripheral IP

- Excellent HMI capacitive touch technology
- The industry's highest code flash memory capacity
- Wide range of connectivity solutions

What is the Renesas RA Family?

The flexible Renesas Advanced (RA) 32-bit MCUs are industry leading 32-bit MCUs with the Arm® Cortex®-M33, -M23 and -M4 processor cores and PSA Certified™ assurance. RA delivers key advantages compared to competitive Arm Cortex-M MCUs by providing stronger embedded security, superior CoreMark® performance, and ultra-low power operation. PSA Certified provides customers the confidence and assurance to quickly deploy secure IoT endpoint and edge devices, and smart factory equipment for Industry 4.0.

- Renesas Advanced: Innovative market-leading products based on Arm Cortex-M cores
- Ultimate promise of IoT security by further enhancing Renesas' popular Secure Crypto Engine (SCE) IP
- Best-in-class peripheral IP provided by Renesas
- Easy development of IoT edge applications using the new Flexible Software Package



Over
240MHz

High performance
using Arm® Cortex®-M Cores

Up to
2MB

High Flash memory integration

Security

Renesas' leading security IP
with options based on TrustZone

USB
CAN-FD
Ethernet

Broad connectivity

Scalable

16pin-176pin packages
48MHz-240MHz performance
Feature and pin compatible

RA Family Overview


The Renesas RA Family lineup can be separated into four product series. Each of these series has a unique feature set, making it ideal for various applications and market needs.

The RA8 Series is the top-end product series, aiming for the highest integration and the highest performance. We position this category with over 240MHz single or dual core, with largest Flash and RAM integration to suit applications where performance really matters most.

The RA6 Series offers the widest integration of communication interfaces, with integrated Ethernet and TFT display drivers. Memory densities range from 256KB Flash to 2MB Flash. The RA6 Series offers up to 240MHz performance running on the Cortex-M4 or Cortex-M33 core with TrustZone. The RA6 Series supports full security integration, making these devices widely desired for security applications.

The RA4 Series bridges the needs of reasonably low power with the demand for connectivity. It offers up to 1MB Flash and a wide range of communication interfaces. The utilized core is the Cortex-M4 or Cortex-M33 with TrustZone and additional security IP integration. Memory densities range from 256KB Flash up to 1MB Flash. These devices provide a CPU frequency of up to 100MHz.

On the lower end is the RA2 Series, where the low power requirements of an application matter most for these device definitions. To achieve the best performance, special power-down modes are provided, making these devices well suited for battery-powered applications. The RA2 Series provides memory densities of up to 256KB embedded Flash and a wide single voltage supply range of 1.6 to 5.5V. These devices use the Cortex-M23 core at up to 48MHz.

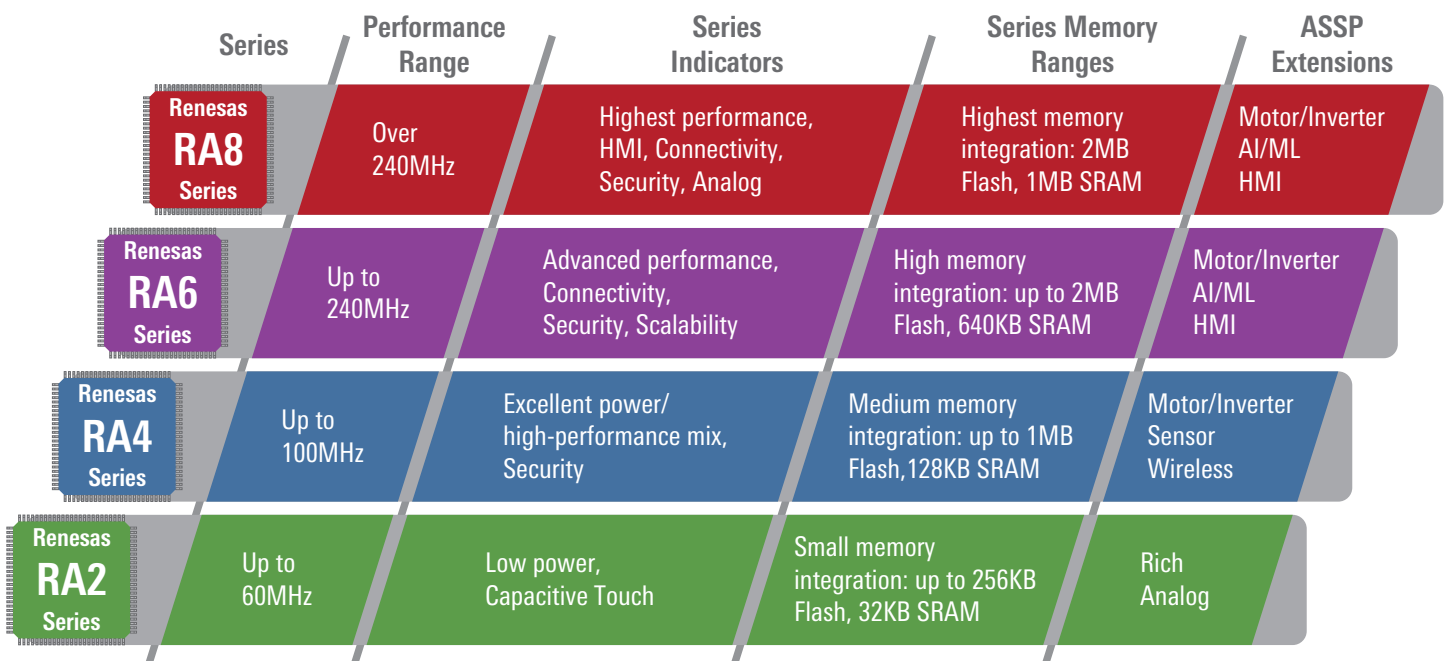

Target Applications and Markets































The Renesas RA Family targets various application fields. Due to its scalability, the RA Family offers parts which cover many different applications and customer needs.

The feature set of the Renesas RA Family is well suited for industrial applications due to its long product life with the 105° Celsius support. With dedicated analog feature integration like ADC, PGA, and comparators, combined with powerful and flexible timers, the RA Family is an ideal fit for motor control applications.

Features like connectivity peripherals, hardware-accelerated cryptography, and scalability make the whole RA Family a perfect fit for a customer within the Connectivity as well as the Building Automation application area.

Customers with Electricity Metering applications will like the scalability and long product life of the RA Family, in addition to the on-chip Secure Crypto Engine.


The integrated Capacitive Touch interface, combined with the scalability of the RA Family, make the RA Family an ideal fit for white goods applications, enabling innovative HMI designs.

	Best Suitable Product Series	Application Examples
Industrial Automation 	  	<ul style="list-style-type: none"> Robotics Door Openers AC Drive AC Servo UPS Functional Safety
Building Automation 	  	<ul style="list-style-type: none"> Fire Panels HVAC Boiler Control Vending Machines Motion Detection Monitoring Systems
Metering 	 	<ul style="list-style-type: none"> Electricity Meters Automated Meter Reading Network Cards Flow Meters Power Meters
Home Appliance 	 	<ul style="list-style-type: none"> HVAC Air Cleaners Coffee Machines Vacuum Cleaners Cleaning Robots White Goods
Connectivity 	 	<ul style="list-style-type: none"> ASi5 / IO-Link Gateways Communication Gateways Data Concentrators Wired Ethernet Fleet Tracking
Security 	 	<ul style="list-style-type: none"> Fire Detectors Burglar Detection Panel Control Door Openers Monitoring Systems Access Control
Motor Control 		<ul style="list-style-type: none"> Brushless DC Motors Induction Motors Stepper Motors Magnetic Encoders Optical Encoders Hall Sensors
Low Power 	 	<ul style="list-style-type: none"> IO-Link Sensors Heat Cost Allocators Portable Audio Devices Smoke Detectors IoT Sensing Nodes Wearable Devices
HMI 	 	<ul style="list-style-type: none"> Voice Recognition Capacitive Touch Panels Printers Vending Machines Home Appliances Medical Equipment
Wireless 		<ul style="list-style-type: none"> Wearable Devices Healthcare Panel Control Gateway Units Door Openers Smart Home

RA2 Series

The RA2 Series is the RA Family's entry-level 32-bit MCU, offering excellent cost, performance, and ultra-low power consumption. It delivers up to 48MHz of CPU performance using an Arm® Cortex®-M23 core with up to 256KB of embedded flash memory and a wide single voltage supply range from 1.6V to 5.5V. With cutting-edge peripherals like high accuracy analog and capacitive touch sensing, the RA2 Series is ideal for system control or user interface applications such as healthcare devices, home appliances, office equipment, and measuring equipment.

RA2 Series Product Groups

Series	Group	Features
	RA2L1	48MHz, Cortex-M23, up to 256KB Flash, 32KB RAM, 48-100 pins, CAN, 32ch Capacitive Touch, Security
	RA2E1	48MHz, Cortex-M23, up to 128KB Flash, 16KB RAM, 25-64 pins, 30ch Capacitive Touch, Security
	RA2E2	48MHz, Cortex-M23, up to 64KB Flash, 8KB RAM, 16-24 pins, I3C interface, Small packages, Security, Ta 125°C
	RA2A1	48MHz, Cortex-M23, 256KB Flash, 32KB RAM, 32-64 pins, USB, CAN, 24-bit Sigma Delta ADC, 16-bit ADC, Security


RA2 Series Benefits

- Large product lineup is starting with 16 pin up to 100 pin and Flash memory size starting from 16KB up to 256KB, including some very small package options, including QFN, LGA, BGA and smallest WLCSP
- Best-in class Active/Standby power consumption for Arm® Cortex®-M23 microcontroller
- On-chip analog components include a high accuracy 16-bit ADC, 24-bit sigma-delta ADC, fast response 12-bit DAC, rail-to-rail low-offset operational amplifiers, and high-speed/low-power comparators
- Reduced cost with on-chip peripheral functions, including high precision (1.0%) high-speed oscillator, temperature sensor, multiple power supply interface ports, analog elements and background operation data flash supporting 1 million erase/program cycles
- Enhanced capacitive touch sensing unit (CTS) with high sensitivity and high noise immunity that realizes intuitive, high-quality HMI designs
- Various communication interfaces such as USB, CAN and I3C, which support IoT applications

RA4 Series

The RA4 Series bridges the need for reasonable low power with the demand for connectivity and performance. These MCUs deliver up to 100MHz of CPU performance using an Arm® Cortex®-M33 core or M4 core with up to 1MB of embedded flash memory. The series offers a wide set of peripherals, including USB, CAN, ADC, Bluetooth Low Energy 5.0, capacitive touch, segment LCD controller, and additional security IP integration, making it suitable for IoT, industrial equipment, home appliances, office equipment, healthcare products, and meters.

RA4 Series Product Groups

Series	Group	Features
	RA4M1	48MHz, Cortex-M4, 256KB Flash, 32KB RAM, 40-100 pins, USB, CAN, Security
	RA4M2	100MHz, Cortex-M33, up to 512KB Flash, 128KB RAM, 48-100 pins, USB, CAN, Advanced Security with TrustZone
	RA4M3	100MHz, Cortex-M33, up to 1MB Flash, 128KB RAM, 64-144 pins, USB, CAN, Advanced Security with TrustZone
	RA4E1	100MHz, Cortex-M33, up to 512KB Flash, 128KB RAM, 48-64 pins, USB, CAN, TrustZone
	RA4W1	48MHz, Cortex-M4, 512KB Flash, 96KB RAM, QFN56, Bluetooth 5.0, USB, CAN, Security

RA4 Series Benefits

- Secure element functionality providing better performance, unlimited secure key storage, key management, and lower BOM cost
- High-performance and low power at the same time with 81µA/MHz while running the CoreMark® algorithm from flash at 100MHz
- High-integration up to 1MB code flash memory with background operation and flash block SWAP operation for flexible and memory optimized firmware updates, 8KB data flash memory, and 128KB SRAM with Parity/ECC
- Rich connectivity with Bluetooth 5.0, USB 2.0 Full-Speed, CAN, SDHI, QSPI, and advanced analog

RA6 Series

The RA6 Series offers the widest integration of communication interfaces as well as the best performance level. These MCUs aim for up to 240MHz of CPU performance using an Arm® Cortex®-M4 or M33 core and a memory range from 256KB to 2MB Flash. The series offers Ethernet, USB Full Speed and High Speed, QSPI, OctaSPI, CAN/CAN FD, and TFT display driver integration. The embedded Secure Crypto Engine is full of features you can leverage in your higher-level solutions with secure element services. The RA6 Series addresses a broad range of applications for IoT endpoints such as white goods, meters, and other industrial and consumer applications.

RA6 Series Product Groups

Series	Group	Features
	RA6M1	120MHz, Cortex-M4, 512KB Flash, 256KB RAM, 64-100 pins, USB, CAN, Security
	RA6M2	120MHz, Cortex-M4, up to 1MB Flash, 384KB RAM, 100-145 pins, USB, CAN, Ethernet, Security
	RA6M3	120MHz, Cortex-M4, up to 2MB Flash, 640KB RAM, 100-176 pins, USB, CAN, Ethernet with IEEE 1588 PTP Control, TFT, Security
	RA6M4	200MHz, Cortex-M33, up to 1MB Flash, 256KB RAM, 64-144 pins, USB, CAN, Ethernet, OctaSPI, Advanced Security with TrustZone
	RA6M5	200MHz, Cortex-M33, up to 2MB Flash, 512KB RAM, 100-176 pins, USB, CAN FD, Ethernet, OctaSPI, Advanced Security with TrustZone
	RA6E1	200MHz, Cortex-M33, up to 1MB Flash, 256KB RAM, 48-100 pins, USB, CAN, Ethernet, TrustZone
	RA6T1	120MHz, Cortex-M4, up to 512KB Flash, 64KB RAM, 64-100 pins, USB, CAN, ADC with S/H, Timer, PGA, High Speed Comparators

RA6 Series Benefits

- Secure element functionality providing better performance, unlimited secure key storage, key management, and lower BOM cost
- High-performance and low-power with 99µA/MHz while running the CoreMark® algorithm from flash at 200MHz
- High-integration up to 2MB code flash memory with background operation, Dual-bank, and flash block SWAP operation for extremely flexible and memory optimized firmware updates, 8KB Data flash memory, and 512KB SRAM with Parity/ECC
- Rich connectivity with Ethernet MAC controller, CAN FD, USB 2.0 High-Speed and Full-Speed, SDHI, Quad and Octa SPI, and advanced analog with three sample and hold per ADC, PGA and high-speed comparators

Functional Safety Solution for Industrial Automation



In the industrial equipment field, the importance of “functional safety,” which aims to maintain safety even when malfunctions occur, is increasingly recognized as a way to prevent the adverse effect of breakdowns and accidents on plant operation, the adverse effect of injuries to personnel on society, and the associated economic losses.

The European Union’s Machinery Directive requires that equipment meet functional safety standards.

In response to the need for functional safety certification in a range of industrial fields, Renesas provides an RA Functional Safety Library designed to reduce the burden on customers at the development and functional safety certification stages.

This RA Functional Safety Library consists of the Self-diagnostic library itself, a safety manual, and a user guide that includes IEC 61508 SIL3 certification document by TÜV Rheinland.

IEC 60730 Safety Classes Support **VDE**

The IEC/UL 60730 is the harmonized safety standard for household appliances.

It describes requirements for automatic controls including heating and air-conditioning applications. Renesas offers for the RA Family a self-test library to fulfill Class B requirements of the IEC 60730 standard, as this is the most commonly used requirement.

The related Appendix H lists all the specific faults that must be tested and details the need to place the equipment into a safe state for any single point failure.

In response to the need of designing IEC/UL 60730 certified applications, Renesas provides an RA Family IEC 60730 Self-Test Library designed to reduce the burden on customers developing their own solutions. The package comes with the sample code and the certification done by VDE.

Integrated Hardware-based Security

In the rapidly growing area of IoT and highly-connected devices, increasing consumer awareness and government legislation is forcing embedded device manufacturers to take the topic of security seriously. Already under the constraints of needing to create cost- and energy-efficient solutions, developers nowadays are required to design and implement security with limited additional time and budget.

The RA Family was designed with security in mind, with scalable hardware-based security features including:

- Isolated cryptographic operations with integrated Secure Crypto Engines
- Unlimited secure key storage
- Hardware-enforced isolation using Arm® TrustZone® technology
- Side-channel protections available

The Flexible Software Package provides integrated, easy-to-configure support for these features, and a collection of Application Projects enables you to easily incorporate them into your design.

The RA Family has achieved the following certifications, providing assurance of these security capabilities and giving you confidence in your product’s security.

- PSA Certified Level 1 and Level 2
- SESIP
- NIST CAVP




Flexible Software Package

The Renesas Flexible Software Package (FSP) is an enhanced software package designed to provide easy-to-use, scalable, high-quality software for embedded system designs using Renesas RA Family Microcontrollers. With the support of new Arm® TrustZone® and other advanced security features, FSP provides a quick and versatile way to build secure, connected IoT devices using production-ready drivers, Azure® RTOS, FreeRTOS™, and other middleware stacks.

FSP uses an open software ecosystem and provides flexibility in using bare-metal programming, included Azure RTOS or FreeRTOS, your preferred RTOS, legacy code, and third-party ecosystem solutions.

The combination of the flexible open architecture of the FSP plus the wide choice of 3rd party solutions as part of the Arm ecosystem increases the range of choice for application development. This means that developers can choose the software model that best suits their needs while utilizing Renesas's excellent Arm-based silicon solutions as well as speed up the implementation time of complex areas like connectivity and security.

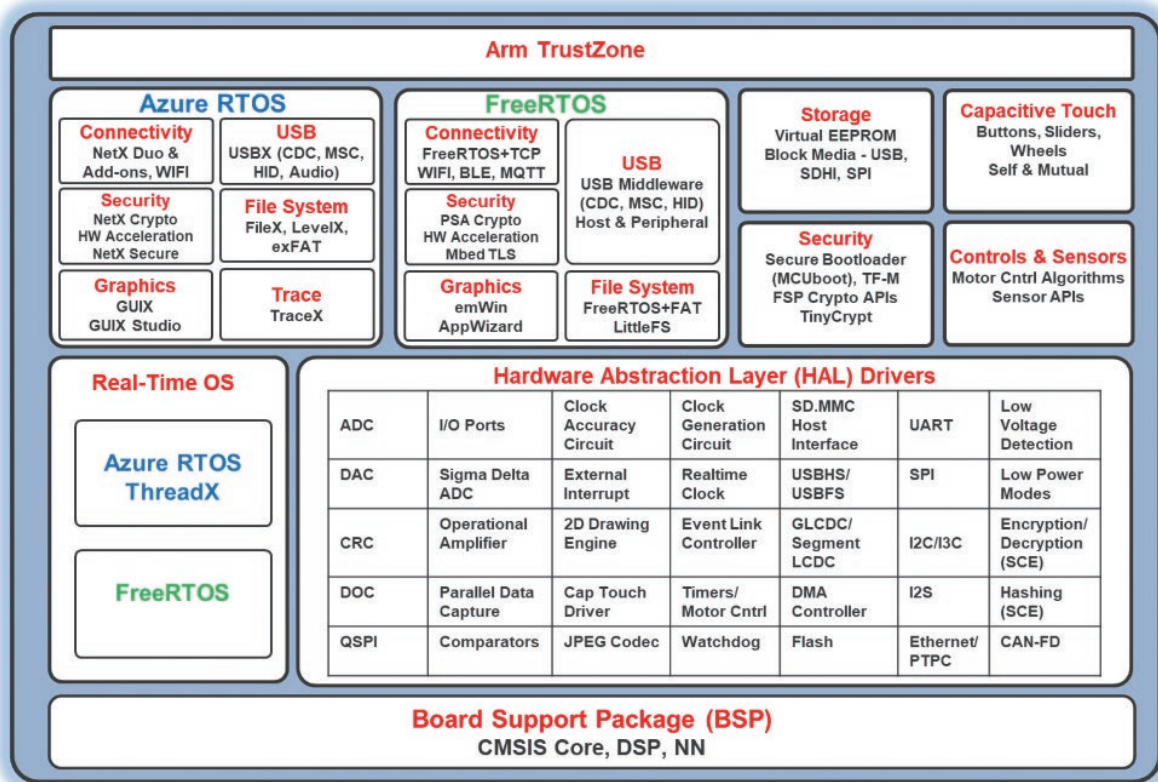

Benefits

- Provides an easy-to-use, scalable, high-quality software for embedded system designs using the Renesas RA Family of Arm microcontrollers
- Includes best-in-class HAL drivers with high performance and low memory footprint
- Middleware stacks with Azure RTOS and FreeRTOS integration are included to ease the implementation of complex modules like communication and security
- The e² studio IDE provides support with intuitive configurators and intelligent code generation to make programming and debugging easier and faster
- Uses an open software ecosystem and provides flexibility in using bare-metal programming, included Azure RTOS and FreeRTOS, your preferred RTOS, legacy code, and third-party ecosystem solutions
- Integrated package with all required components for easy setup and starting development (single installer with e² studio, CMSIS packs, tool chain and Segger J-Link drivers)
- Complete source code available through GitHub

Development Environment

The RA family development environment offers flexibility in terms of different supported on-chip debuggers, IDEs, and compilers. Customers can use the Renesas e² studio, Keil MDK and IAR Embedded Workbench. All tools can use the RA configurators for FSP driver and middleware selection and configuration, in addition to pin mapping and clock tree configuration.

Overview

	Renesas e ² studio	IAR Systems Embedded Workbench for Arm	Keil Microcontroller Development Kit
Compilers	- GCC v9 or later - IAR v8.50 or later * - Arm [®] v6.12 or later *	- IAR v8.50 or later *	- Arm v6.12 or later *
Debugger probes	- Renesas E2/E2 Lite - SEGGER J-Link	- IAR I-Jet - SEGGER J-Link	- SEGGER J-Link - Keil ULINK (limited support)
Smart Configurator	Built-in - BSP - Clock - Pin - Drivers - Interrupts	Supplied as RASC - BSP - Clock - Pin - Drivers - Interrupts	Supplied as RASC - BSP - Clock - Pin - Drivers - Interrupts
Application specific configurator	- QE for Capacitive Touch - QE for BLE - QE for AFE - Motor Control Workbench	Under consideration	Under consideration

*: Compiler needs to be purchased and licensed directly from third-party.

Benefits

The eclipse-based e² studio along with a GCC compiler and SEGGER J-Link debugger is the primary development solution for RA MCUs and Flexible Software Package (FSP). e² studio offers a complete development flow from initial project generators, graphical FSP configuration and comprehensive debugger options.

As the RA MCU family includes TrustZone-enabled devices, new configuration options ensure that a development engineer can concentrate on the application rather than the underlying technology.

Renesas recognizes that Arm based MCUs benefit from a wide ecosystem, so we have worked with Keil and IAR Systems to develop the RA Smart Configurator (RASC) that inherits all the FSP configurator options from e² studio to extend the rich development options into the MDK and EWARM IDEs. To complement the powerful SEGGER J-Link probes, RA MCUs have been ported to the Renesas E2 and E2 Lite debuggers.

Production programming options are available from Renesas (RFP and PG-FP6) in addition to numerous third-party solutions such as SEGGER Flasher. Please contact your preferred partner to request RA production device programming support.

Development Boards

RA MCU development boards come in three different flavors. The Evaluation Kit (EK), referred to as “Regular” board provides the best platform to discover and develop using all features of the selected RA MCU group. The “Special” category offers solution kits supporting specific features of the selected MCU, like motor control and capacitive touch. The third category which is listed as “Entry” features the Fast Prototyping Board (FPB) which offers a very low cost option to get started with the RA Family without compromise. All development boards enable users to effortlessly evaluate the features of different RA MCU Groups and develop embedded systems applications using the Flexible Software Package (FSP) and e² studio IDE. Users can utilize rich on-board features along with their choice of popular ecosystem add-ons to bring their big ideas to life.

Overview

Series	Group	Kit Name	Category	MP Kit Orderable Part Number
RA6	RA6M5	EK-RA6M5	Regular	RTK7EKA6M5S00001BE
	RA6M4	EK-RA6M4	Regular	RTK7EKA6M4S00001BE
	RA6M3	EK-RA6M3	Regular	RTK7EKA6M3S00001BU
		EK-RA6M3G	Regular	RTK7EKA6M3S01001BU
	RA6T1	RA6T1 Motor RSSK	Special	RTK0EMA170S00020BJ
	RA6M2	EK-RA6M2	Regular	RTK7EKA6M2S00001BU
		RA6M2 Touch RSSK	Special	RTK0EG0021S01001BJ
	RA6M1	EK-RA6M1	Regular	RTK7EKA6M1S00001BU
RA6E1	FPB-RA6E1	Entry	RTK7FPA6E1S00001BE	

Series	Group	Kit Name	Category	MP Kit Orderable Part Number
RA4	RA4M3	EK-RA4M3	Regular	RTK7EKA4M3S00001BE
	RA4M2	EK-RA4M2	Regular	RTK7EKA4M2S00001BE
	RA4M1	EK-RA4M1	Regular	RTK7EKA4M1S00001BU
	RA4W1	EK-RA4W1	Regular	RTK7EKA4W1S00000BJ
	RA4E1	FPB-RA4E1	Entry	RTK7FPA4E1S00001BE
RA2	RA2A1	EK-RA2A1	Regular	RTK7EKA2A1S00001BU
	RA2E1	EK-RA2E1	Regular	RTK7EKA2E1S00001BE
		FPB-RA2E1	Entry	RTK7FPA2E1S00001BE
	RA2L1	EK-RA2L1	Regular	RTK7EKA2L1S00001BE
		RA2L1 Touch RSSK	Special	RTK0EG0022S01001BJ
	RA2E2	EK-RA2E2	Regular	RTK7EKA2E2S00001BE

Key Features

Ecosystem and System Control Access

- USB Full Speed Host & Device
- Multiple Power Sources, 2A max. LDO Current
- Multiple Debug Modes (On-board, Out, In)
- Multiple User LEDs and Buttons
- Popular Ecosystem Expansion Connectors
 - MikroElektronika™ mikroBUS, SparkFun® Qwiic®, SeeedGrove® system, Digilent Pmod™
- Boot Configuration

Special Feature Access


- Ethernet
- Octo-SPI and Quad-SPI
- CAN Flexible Data-rate (FD)
- USB High-Speed Host & Device

Native MCU Pin Access

- RA MCU
- Prototyping-Friendly Male Pin Headers
- MCU Current Consumption
- USB Current Consumption

Benefits


The kits are based on a novel architecture that provides an unparalleled combination of standardization and flexibility. The kit design helps users shorten the learning curve and accelerate development, providing more time for differentiating innovation or taking products to market faster. The kits also feature multiple debugging modes that allow users to debug the RA microcontroller on the kit or their custom board. The kits are also compatible with popular ecosystems. The expansion ports allow users to conveniently enhance the functionality of the kits by simultaneously connecting several third-party add-ons to implement custom functionality necessary to put together a variety of sophisticated, real-world end-applications.

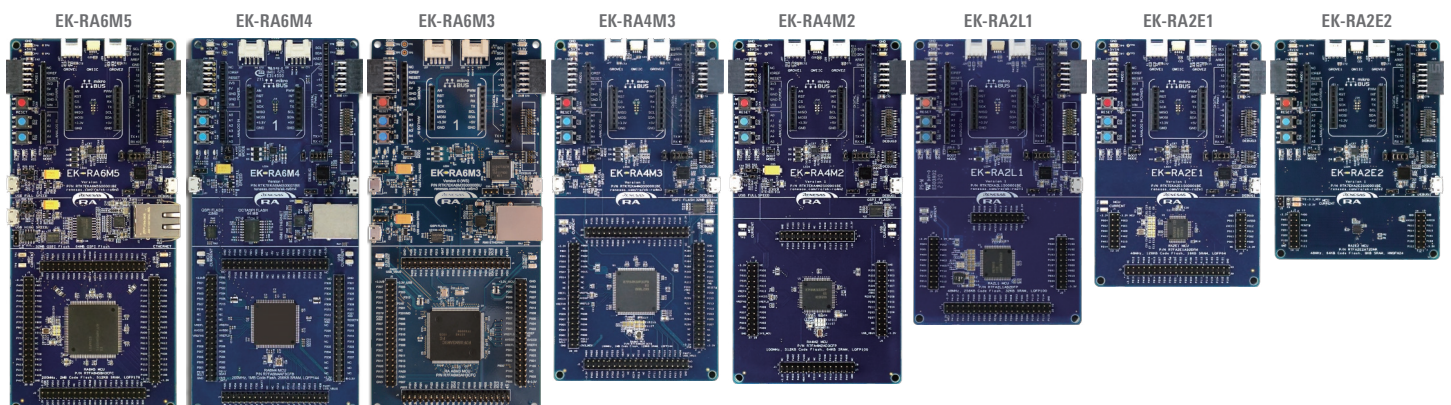

Examples of RA MCU Evaluation Kits

RA Partners

Renesas enables a comprehensive partner ecosystem to deliver an array of software and hardware building blocks that will work out-of-the-box with Renesas RA Family MCUs. The Renesas RA ecosystem will help accelerate development of IoT applications, including core technologies such as security, safety, connectivity, and HMI among others.

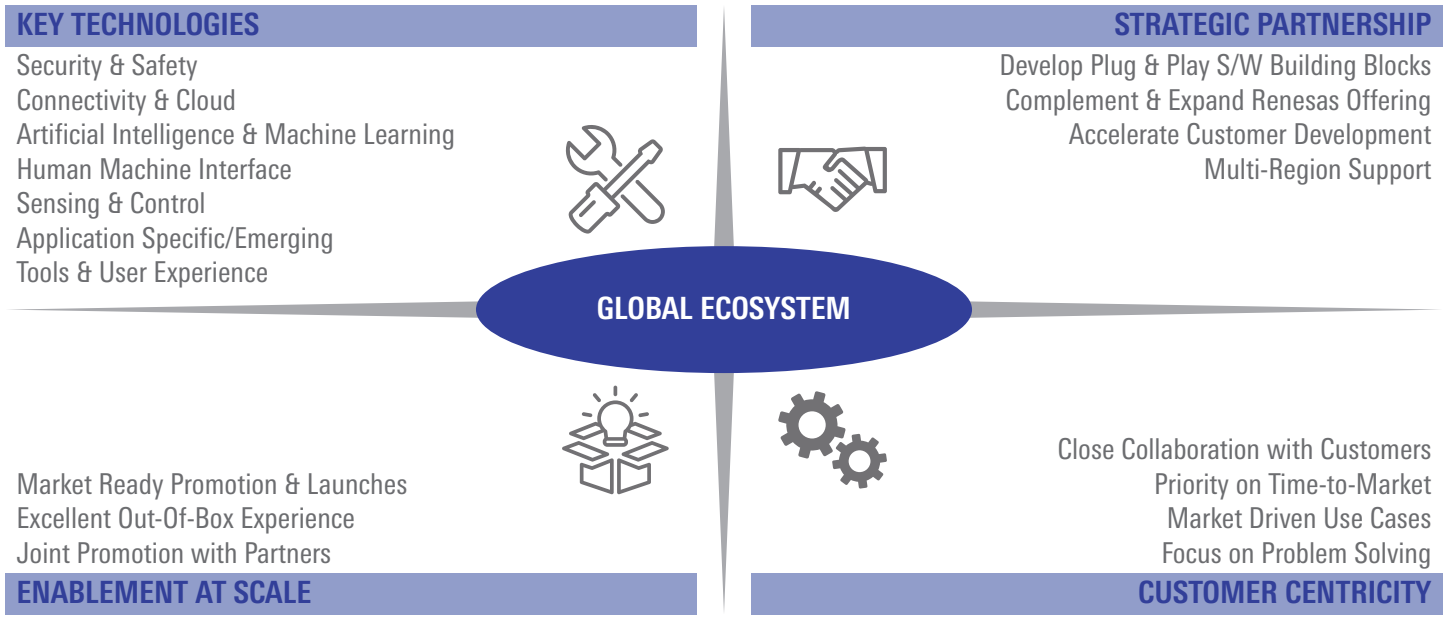

Partner Overview

The partner overview shown might not be complete since the partner network is extending almost daily. For best reference and latest data we recommend checking our webpage at: www.renesas.com/ra-partners

Security & Safety	Cypherbridge	SMARTAXIOM	SEGGER	Verify Security	Ubiquitous AI Corporation	0x5	HEX-FIVE	eps
	wolfSSL	OPEN GROUP	IAR SYSTEMS	SECURE THINGZ	orchestrating a brighter world	NEC	ECO LUX	
Connectivity & Cloud	reLoc	Microsoft Azure	silex technology	ALTOBEAM	one	Proassist		
	Alibaba Cloud	AliOS Things	pelion	clarinox	HUAWEI	Ubiquitous AI Corporation		
Artificial Intelligence (AI)	ignitarium Spark On.	Qeexo	one					
Human Machine Interface (HMI)	Algorithm Specialist	TMC	NEW TECH INTERIOR	sensory	Cyberon	HGI	DSP CONCEPTS	
	Aluminum Works, Inc.	FDI	Pachira	SEGGER	Qt	TES Electronic Solutions	TOSHIBA	
	CapExt	TOUCH	文耀科技	CRIWARE	KDDI	KDDI Research		
Sensing & Control	BFG ENGINEERING	Desk Top Lab						
Application Specific/Emerging		NTXEmbedded	ORBSTAR	SEFIOUS	TATA ELXSI	GT&T		
	MBS	SW SYS	CS Lab	create software	pelion			
Tools & User Experience		SEGGER	CapExt	RTOS	DTS INSIGHT	AlphaProject		
	arm KEIL	MINATO	Flash Support Group	eForce	uQuest	IAR SYSTEMS	SECURE THINGZ	
	percepio	GRAPE SYSTEMS	上海瑞利微电子有限公司	ASMIS	KMC	Ubiquitous AI Corporation	MIKROE	

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
 2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
 3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
 5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
 6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
 Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersa repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
 7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
 8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
 9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
 12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
 13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

SALES OFFICES

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics Corporation

TOYOSU FORESIA, 3-2-24 Toyosu, Koto-ku, Tokyo 135-0061, Japan

Renesas Electronics America Inc. Milpitas Campus

1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics America Inc. San Jose Campus

6024 Silver Creek Valley Road, San Jose, CA 95138, USA
Tel: +1-408-284-8200, Fax: +1-408-284-2775

Renesas Electronics Canada Limited

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Room 101-T01, Floor 1, Building 7, Yard No. 7, 8th Street, Shangdi, Haidian District, Beijing 100085, China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai 200333, China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, #06-02 Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit No 3A-1 Level 3A Tower 8 UDA Business Park, No 1 Jalan Pengaturcara U1/51A, Seksyen U1, 40150 Shah Alam, Selangor, Malaysia
Tel: +60-3-5022-1288, Fax: +60-3-5022-1290

Renesas Electronics India Pvt. Ltd.

No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700

Renesas Electronics Korea Co., Ltd.

17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338