


PCB TERMINAL BLOCKS

5mm Pitch High Power Rising Clamp Terminal Blocks


- 2 & 3 pole double interlocking mechanism for increased strength
- 4-12 pole solid block
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 0.2-4.0mm² (30-12AWG) solid cable
- 0.2-2.5mm² (30-12AWG) stranded cable
- Guided pin alignment
- Captive screw
-  approved

CTB0700



TYPE NO.	POLES	LENGTH
CTB0700/2	2	10mm
CTB0700/3	3	15mm
CTB0700/4	4	20mm
CTB0700/5	5	25mm
CTB0700/6	6	30mm
CTB0700/7	7	35mm
CTB0700/8	8	40mm
CTB0700/9	9	45mm
CTB0700/10	10	50mm
CTB0700/11	11	55mm
CTB0700/12	12	60mm

SPECIFICATION	
Rating	24A/320V UL=16A/300V, VDE&IMQ=24A/450V
Dielectric strength	≥2.5kV
Impulse withstand voltage	4kV
Working temperature	110°C
Moulding	UL94-V0 flame retardant PA66
Pin/terminal	Tinned, nickel plated brass
Rising clamp	Tinned, nickel plated brass
Screw/torque	M3 steel zinc plated, 0.5Nm
Recommended PCB hole size	ø1.5mm

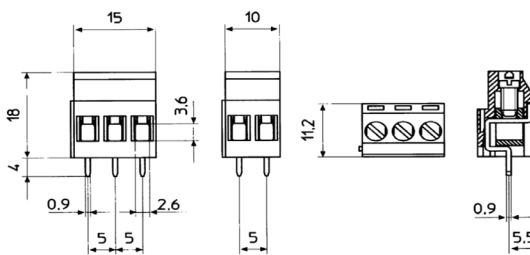

PCB
TERMINAL
BLOCKS

INTER-
CONNECTION

FUSES &
FUSE-
HOLDERS

LEDs &
INDICATORS

MINIATURE
SWITCHES

LIMIT &
SAFETY
SWITCHES

CONTROL
PRODUCTS

INTERFACE
MODULES &
SUPPORTS

RELAY
BASES

DIN RAIL
ENCLOSURES

BATTERIES

SOLAR
PANELS

TRANS-
FORMERS