

# 1052-12




## DATA SHEET (page 1 of 2).

Designation : 4 mm Banana (male) Plug to M3 Threaded Stud Adapter w/ 2 Hex Nuts.  
P / N : 1052-12 (nickel plated parts)

Applications : to repair or make panels or boxes providing 4 mm banana connections for power supplies, measurements, controls, tests, ...

### How to implement :

The M3 x 0.5 thread complies with  $\text{Ø}3.0 \text{ mm} -0 \text{ mm} +0.1 \text{ mm}$  holes.

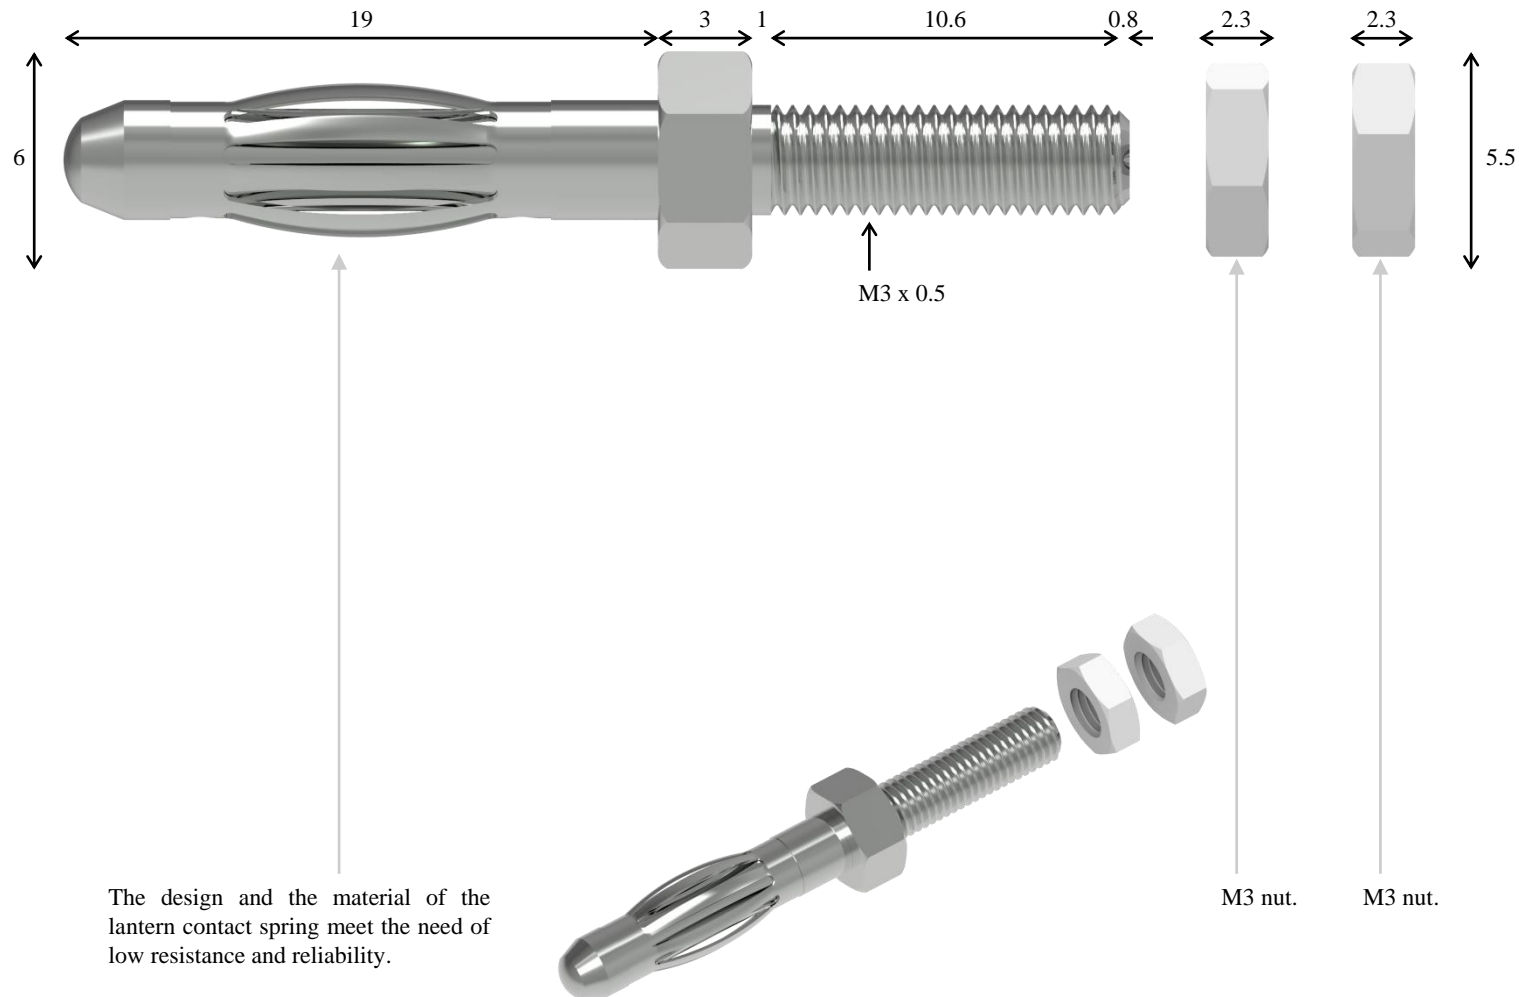

The design and the material of the lantern contact spring meet the need of low resistance and reliability.

With a spanner SW6 mm I screw and tighten the M3 nuts on the M3x0.5 thread to hold ring lug for example. (2.3 N.m maxi. torque.)


(With a spanner SW6 mm I can screw and tighten the adapter into a M3 threaded hole also. 2.3 N.m maxi. torque.)


1052-12



## DATA SHEET (page 2 of 2).

Designation : 4 mm Banana (male) Plug to M3 Threaded Stud Adapter w/ 2 Hex Nuts.  
P / N : 1052-12 (nickel plated parts)

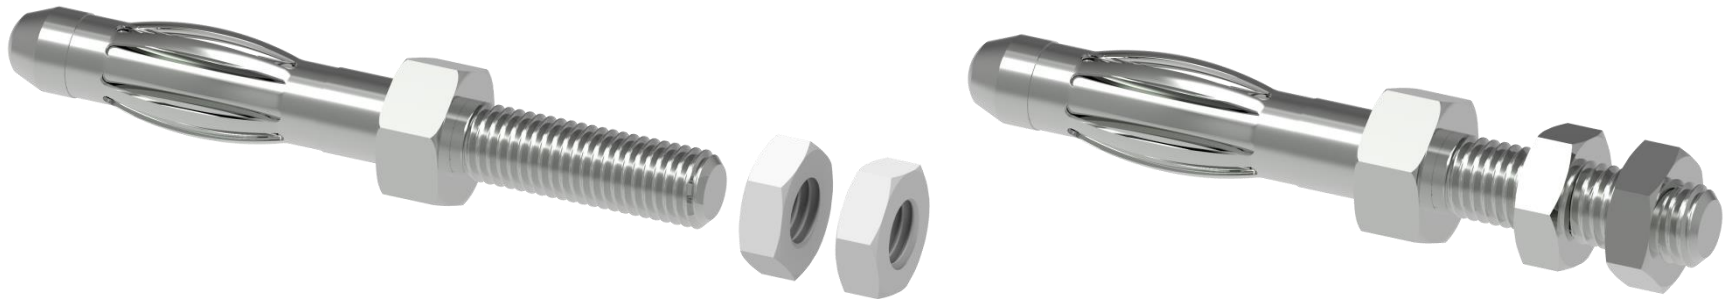

Electrical safety	Very low voltages only : 30 V AC / 60 V DC
Operating temperature range	-20 °C mini., +200 °C maxi .
Conformity	<ul style="list-style-type: none"><li>• European Directive “RoHS” 2011/65/EU. European Directive 2015/863/EU.</li><li>• European regulation n°1907 / 2006 “REACH”.</li><li>• European regulation 2017 / 821 “Conflict minerals”.</li></ul>
Environment	<ul style="list-style-type: none"><li>• "RoHS" compliant, Pb ≤ 4 % in conductor, Pb ≤ 0.1 % in insulator, Hg ≤ 0.1 %, Cr VI ≤ 0.1 %, Cd ≤ 0.01 %, PBB ≤ 0.1 %, and PBDE ≤ 0.1 %.</li><li>• REACH compliant, no substances from the candidate list of SVHC for authorisation at mass concentrations greater than 0.1 %.</li></ul>
Materials	Conductors : nickel-coated brass and zinc-coated steel.
Weight	0.004 kg.
Origin	 Designed and manufactured in France.
Reliability benchmark	Year of 1st placing on the market 1992.

Contact us at :

sales@electro-pjp.com

+33(0) 384 821 330

www.electro-pjp.com

ELECTRO-PJP  
ZI «Charmes d'Amont»  
13 rue de Madrid  
39500 TAVAUX  
FRANCE