



PLUG-IN RELAY COMPACT UNIT 24V DC, 2 CO LED
MODULE RED SOCKET W. LOGIC ISOLATION PLUG-
IN TERMINAL (PUSH-IN)

Figure similar

General technical data:

| | | |
|--|---|------------|
| Type of voltage | | DC |
| Control supply voltage | | |
| <ul style="list-style-type: none"> • for DC Rated value — minimum — maximum | V | 24 |
| | V | 24 |
| Number of NC contacts for auxiliary contacts | | 0 |
| Number of NO contacts for auxiliary contacts | | 0 |
| Number of CO contacts for auxiliary contacts | | 4 |
| Operating current of the auxiliary contacts | | |
| <ul style="list-style-type: none"> • at DC-13 — at 24 V | A | 8 |
| <ul style="list-style-type: none"> • at AC-15 — at 230 V | A | 5 |
| Design of the switching function positively driven | | No |
| Switching behavior | | monostable |

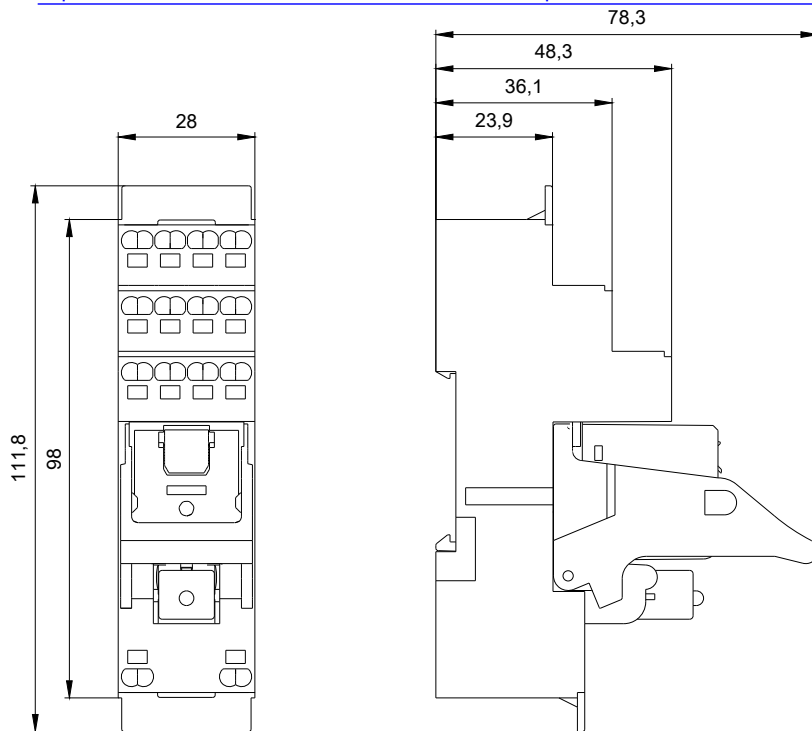
Mechanical data:

| | | |
|---|----|-------------------------|
| Type of electrical connection | | spring-loaded terminals |
| Design of the relay operating mechanism | | poled |
| Product component Plug-in socket | | Yes |
| Width | mm | 28 |
| Height | mm | 79 |
| Depth | mm | 98 |

Certificates/ approvals:



Further information

Industry Mall (Online ordering system)<http://www.siemens.com/industrymall>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=LZS:PT2D5L24>**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT2D5L24>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=LZS:PT2D5L24&lang=en

last modified:

W9 4444: LZS:PT2D5L24_ALL
W9 3333: LZS:PT2D5L24_ALL
15.01.2015