


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CN INITIAL RELEASE	02/12/2019	DGUTTADAUR

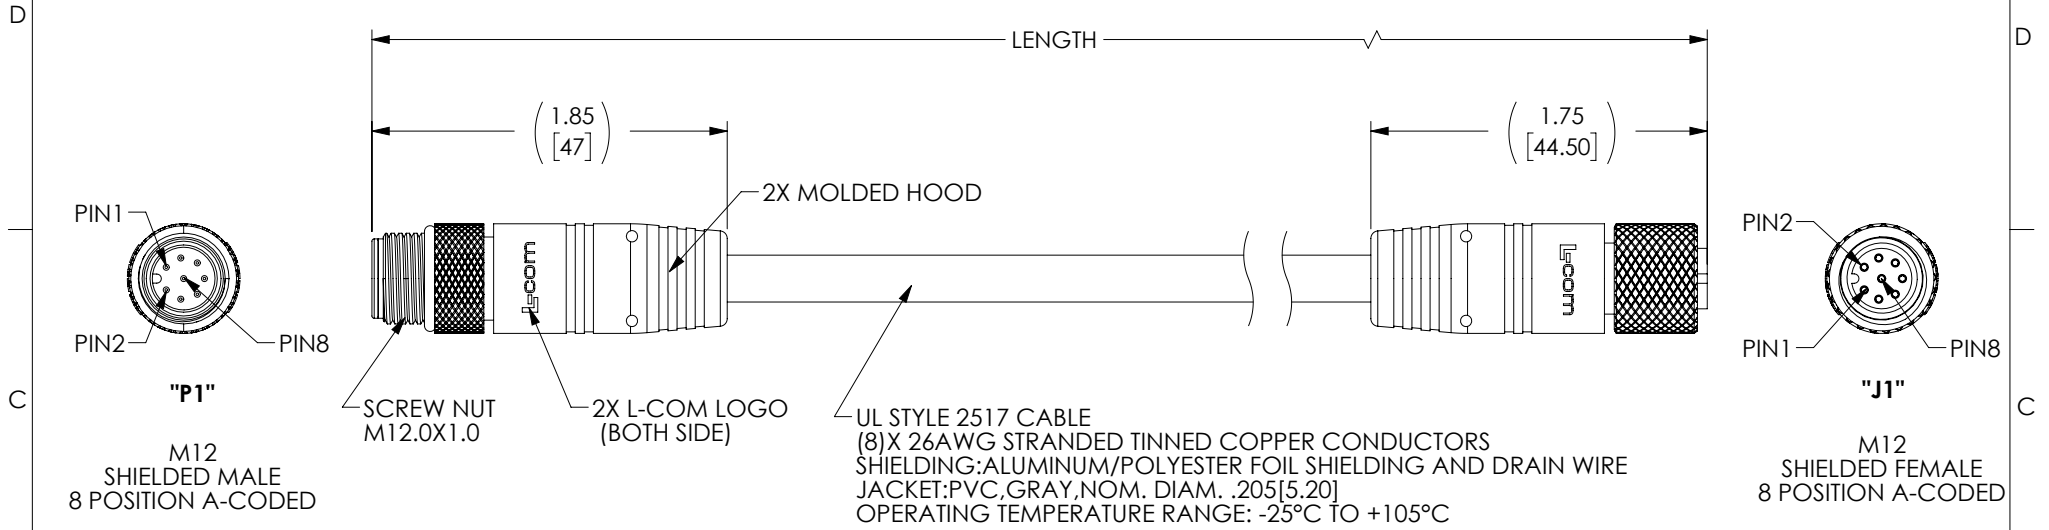

**NOTES**


**MATERIAL:**  
 MOLDED HOOD:PVC, BLACK, UL94V-0, UV RESISTANCE  
 INSULATOR:PBT+GF, BLACK  
 SHELL/SCREW NUT:BRASS, NICKEL PLATE  
 CONTACTS:PHOSPHOR BRONZE, 15µ" MIN. GOLD PLATE

**ELECTRICAL:**  
 NOMINAL VOLTAGE RATING:30 V AC/DC  
 MAX CURRENT:2A

**APPLICATION:**  
 INGRESS PROTECTION RATING IS IP67 (MATED).

**ENVIRONMENTAL:**  
 CABLE JACKET RESISTANCE:SUNLIGHT, MOISTURE  
 CABLE JACKET FLAME RATING:VW-1

**MISCELLANEOUS**  
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

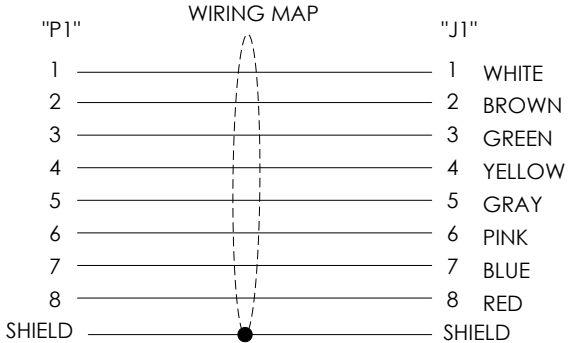

PART NUMBER	LENGTH	
	FEET	METERS
TRG884-C6G-05M	1.64	0.5
TRG884-C6G-1M	3.28	1.0
TRG884-C6G-2M	6.56	2.0
TRG884-C6G-3M	9.84	3.0
TRG884-C6G-5M	16.41	5.0
TRG884-C6G-10M	32.82	10.0

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY DCUI	12/04/2018		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [13]	CHECKED BY SPAN	12/04/2018	CATEGORY	
	APPROVED BY DGUTTADAUR	12/04/2018	TELECOM/MODULAR	
PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>TRG884-C6G</b>
	COLOR VARIATIONS MAY OCCUR	SCALE: NONE	CAD FILE: TRG884-C6G.SLDDRW	SHEET 1 OF 1