






SYNCHRONOUS BELTS FOR A WIDE VARIETY OF APPLICATIONS



POWERGRIP® XL, L, H, XH & XXH

Classical synchronous belt

Gates classical synchronous PowerGrip® belt offers a maintenance-free and economical alternative to conventional drives like chains and gears. Its application range extends from minimum drives (computer printers) to heavy-duty machinery (oil pumps, etc).

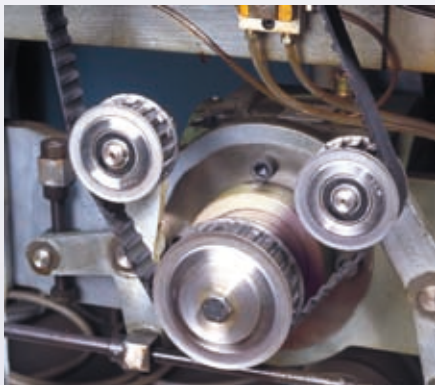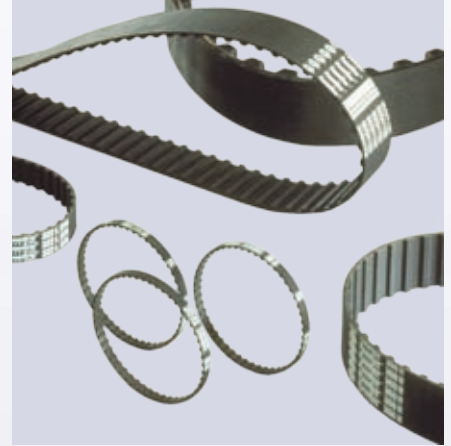

Identification

Three part number on the back of the belt indicating belt length, pitch and width.


Construction

- Trapezoidal tooth form.
- Precisely formed and accurately spaced elastomeric teeth ensure correct engagement with the pulley grooves.
- Fibreglass tensile cords.
- Nylon fabric cover protects the tooth surfaces.
- Available in standard pitches according to ISO 5296: MXL, XL, L, H, XH, XXH. For MXL sizes and description, see chapter on PowerGrip® MXL on pages 54-55.

Advantages

- Power transmission of up to 150 kW and speeds of up to 10,000 rpm.
- Peripheral speed up to 80 m/s.
- Positive slip-proof engagement.
- Constant angular velocity.
- Efficiencies up to 99%.
- Low bearing load because of freedom of high tension.
- Maintenance-free continuity of operation.
- Wide range of load capacities and speed ratios.
- Compact design.
- Economical operation.

Sections and nominal dimensions

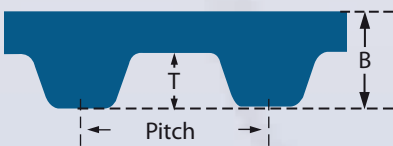

	Pitch inch	T mm	B mm
XL	1/5	1.27	2.3
L	3/8	1.91	3.5
H	1/2	2.29	4.0
XH	7/8	6.36	11.4
XXH	1.1/4	9.53	15.2

NOTE

For correct usage of the belt please request Gates' Synchronous Belt Drive Design Manual (E2/20099).




DOUBLE-SIDED SYNCHRONOUS BELTS FOR CONTRA-ROTATING DRIVES



TWIN POWER®

Double-sided synchronous belt

Due to its double and directly opposite teeth, Twin Power® synchronous belts ensure high loading capacity on contra-rotating drives and ensure smooth running and high flexibility. They are available with the classical trapezoidal but also with the unique GT tooth profile. The Twin Power® GT2 belt has twice the power rating of Twin Power® HTD® belts. It is characterised by extraordinary load-carrying power and high tooth jump resistance, thus ensuring a positive non-slip drive. In addition, it runs at very low noise. Twin Power® is available in PowerGrip® GT2 8MGT and 14MGT, HTD® 5M and PowerGrip® XL, L and H pitches.

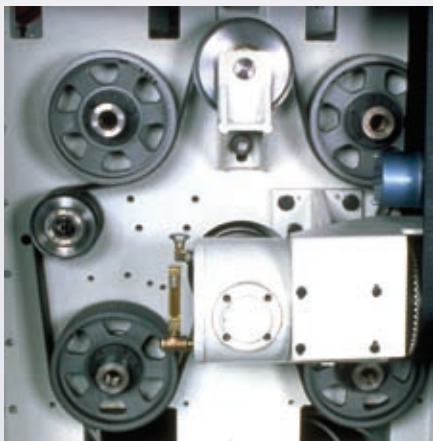

Identification

Three part number on one side of the belt indicating pitch, belt length and width.

Construction


- Similar in construction to PowerGrip® classical synchronous and PowerGrip® GT2 belts: strong tensile member, precision-formed elastomeric teeth and body.
- Wear resistant nylon fabric on both tooth sides.

Advantages

- High loading capacity.
- Twin Power® can transmit up to 100% of its maximum rated load from either side of the belt; alternatively, it can transmit a load on both sides - provided the sum of the loads does not exceed the maximum capacity.
- Non-slip positive drive.
- Running at low noise.
- Free of lubrication and maintenance.


Sections and nominal dimensions

PowerGrip® GT2




	Pitch mm	W mm	T mm
8MGT	8.0	2.00	3.40
14MGT	14.0	3.70	5.82

PowerGrip® HTD



	Pitch mm	W mm	T mm
5M	5.0	1.5	2.1

PowerGrip®



	Pitch inch	W mm	T mm
XL	1/5	0.508	1.27
L	3/8	0.762	1.91
H	1/2	1.372	2.29