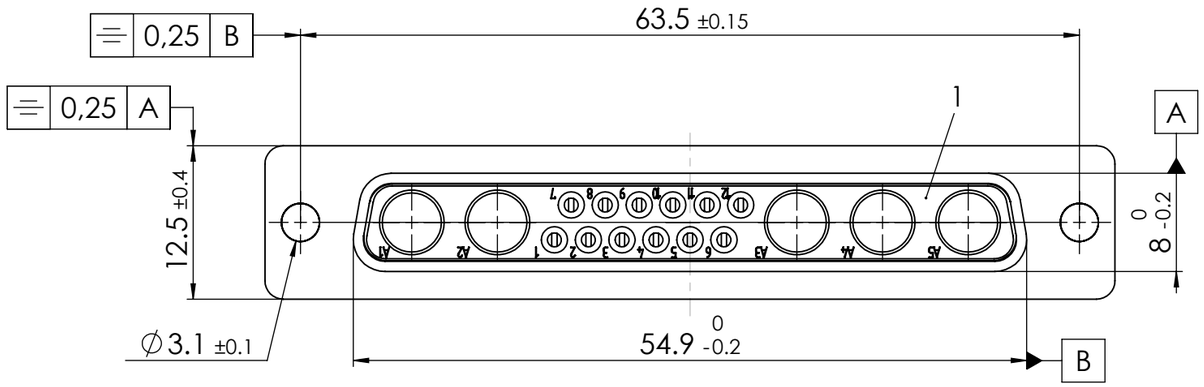



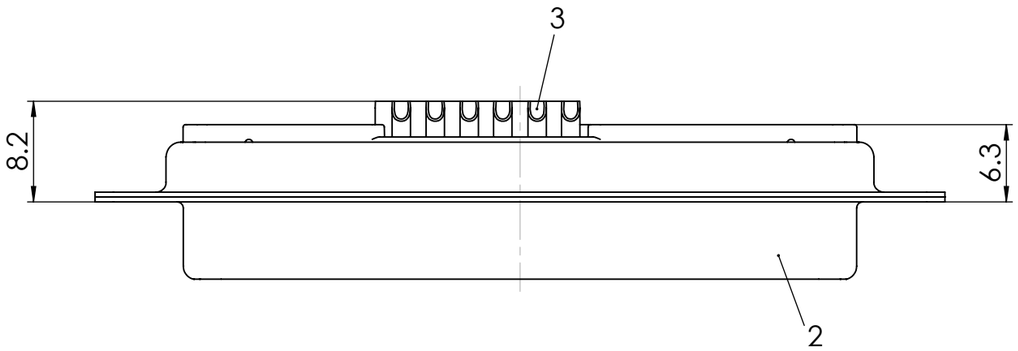

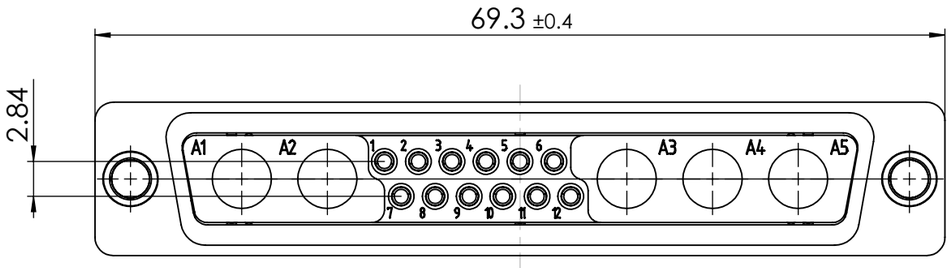

RoHS compliant

No.	St.	Part	Type Description/Material	Surface plating/Colour/Class
3	12	Signal contact	S0 / Brass	AuroPur / AWG 20
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C - +130°C)	green

Measurement without tolerance acc. to ISO 2768-m

SCALE 2:1

TITLE: D-Sub Mixed-Layout Connector

	NAME / DATE
DRAWN	sschref 09-04-2014
CHECKED	sschref 09-04-2014

FCT a molex company

DWG.NO. FM17W5SA-K121

REV. 1

REV.	DATE	CH.-NO.	ORIGINAL: DIN A3-DRAWING AS A FILE	REPLACEMENT FOR:	PAGES 1
1					

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING, WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBLICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.