


<b>TECHNICAL DATASHEET</b>	code	<b>74004E</b>
	version	<b>3</b>
	date	<b>2016-03-10</b>
<b>4 PR CAT7 S/FTP solid 23AWG PVC</b>	page	<b>1/3</b>

### STANDARDS

- ISO/IEC 11801 and ISO/IEC 24702
- EN 50173 – 1
- TIA/EIA-568-B.2 (May 2001).
- UL AWM 20276

### CABLE CONSTRUCTION

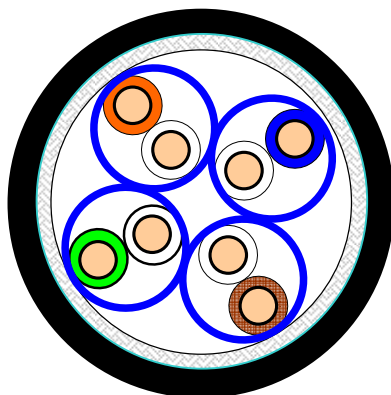

#### **CABLE CONSTRUCTION**

##### Conductor

Material	Solid bare copper
Diameter	AWG 23

##### Insulation

Material	Foam-Polyethylene
Diameter over insulated conductor	1.45 ± 0.05 mm

##### Pair

Pair	2 twisted insulated conductors with overall foil
Number of pairs	4, all twisted together
Colour code pair 1	White & Blue
Colour code pair 2	White & Orange
Colour code pair 3	White & Green
Colour code pair 4	White & Brown

##### Shielding foil over element

Material	Laminated Aluminium / Polyester
Position aluminium	Outside

##### Braid

Material	Solid tinned copper
Coverage	≥ 65 %

##### Sheath

Material	PVC oil and UV resistant
Colour	Black

<b>TECHNICAL DATASHEET</b>	code	<b>74004E</b>
	version	<b>3</b>
	date	<b>2016-03-10</b>
<b>4 PR CAT7 S/FTP solid 23AWG PVC</b>	page	<b>2/3</b>

Diameter 8.0 ± 0.2 mm

### Electrical characteristics

#### Low frequency and D.C.

D.C. resistance conductor	< 75	Ω/km
Resistance unbalance	< 2	%
D.C. insulation resistance	> 5000	MΩ.km
Dielectric strength cond. – cond. (2 sec.)	2.5	kV D.C.
Mutual capacitance	< 56	nF/km
Capacitance unbalance	< 1600	pF/km

#### High frequency

Velocity of propagation		
@ 4 – 600 MHz	≥ 0.6	c
Skew		
@ 1 – 600 MHz	≤ 40	ns/100m
Propagation delay		
@ 1 – 600 MHz	≤ 534 + 36/Vf	ns/100m
Longitudinal attenuation		
@ 4 – 1000 MHz	≤ 1.8*Vf+0.01*f+0.2/Vf	dB/100m
Near end cross talk (NEXT)		
@ 1 – 31.25 MHz	≥ 80	dB
@ 31.25 – 1000 MHz	≥ 102.4 – 15 log(f)	dB
Power sum near end cross talk (PSNEXT)		
@ 1 – 31.25 MHz	≥ 77	dB
@ 31.25 – 1000 MHz	≥ 99.4 – 15 log(f)	dB
Equal level far end cross talk (ELFEXT)		
@ 1 – 5 MHz	≥ 80	dB
@ 5 – 1000 MHz	≥ 94.0 – 20 log(f)	dB
Power sum equal level far end cross talk (PSELFEXT)		
@ 1 – 5 MHz	≥ 77	dB
@ 5 – 1000 MHz	≥ 91.0 – 20 log(f)	dB
Attenuation cross talk ratio (ACR)		
@ 4 – 31.25 MHz	≥ 80 - (1.85*Vf+0.01*f+0.2/Vf)	dB
@ 31.25 – 1000 MHz	≥ (102.4 – 15 log(f)) - (1.8*Vf+0.01*f+0.2/Vf)	dB
Power sum attenuation cross talk ratio (PSACR)		
@ 4 – 31.25 MHz	≥ 77 - (1.8*Vf+0.01*f+0.2/Vf)	dB
@ 31.25 – 1000 MHz	≥ (99.4 – 15 log(f)) – (1.8*Vf+0.01*f+0.2/Vf)	dB
Input impedance open/short (Zo/s)		
@ 4-100 MHz	100 ± 15	Ω
@ 100 – 250 MHz	100 ± 22	Ω
@ 250 – 600 MHz	100 ± 25	Ω
Mean characteristic impedance (Zcm)		

<b>TECHNICAL DATASHEET</b>	code	<b>74004E</b>
	version	<b>3</b>
	date	<b>2016-03-10</b>
<b>4 PR CAT7 S/FTP solid 23AWG PVC</b>	page	<b>3/3</b>

@ 100 MHz	100 ± 5	Ω
Return Loss (RL)		
@ 4 ≤ f ≤ 10 MHz	≥ 20 + 5 log (f)	dB
@ 10 ≤ f ≤ 20 MHz	≥ 25	dB
@ 20 ≤ f ≤ 250 MHz	≥ 25 – 7 log (f/20)	dB
@ 250 ≤ f ≤ 600 MHz	≥ 17.3	dB
@ 600 ≤ f ≤ 1000 MHz	≥ 25 – 7 log (f/20)	dB
Coupling attenuation Type II		
@ 30 – 100 MHz	> 80	dB
@ 100 – 1000 MHz	> 80 – 20 log(f/100)	dB
Transfer Impedance (Z <sub>T</sub> )		
@ 1 MHz	< 5	mΩ/m
@ 10 MHz	<5	mΩ/m
@ 30 MHz	< 30	mΩ/m
@ 100 MHz	< 100	mΩ/m

### MECHANICAL CHARACTERISTICS

Elongation at break conductor	≥ 10 %
Elongation at break insulation	≥ 100 %
Elongation at break sheath	≥ 100 %
Tensile strength sheath	≥ 12 Mpa

### ENVIRONMENTAL AND OVERALL CHARACTERISTICS

Maximum operating voltage	30 V A.C.
Maximum continuous current per conductor (@25°C)	1.4 A rms
Oil resistant acc	IEC 60811-2-1
Maximum pulling tension	80 N
Minimum bending / setting radius	80 / 40 mm
Temperature range installing	- 15 to +60 °C
Temperature range operating	- 40 to +80 °C
Temperature range storage	-40 to +80 °C
Flame propagation	IEC 60332-1
Flame resistance UL AWM	Cable flametest
UL AWM Style	20276



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.