



# Protective Vents

*SNAP-IN SERIES*

## Fast, reliable installation and durable protection for enclosures of all sizes

### VENTING FOR PROTECTION

Harsh or changing environmental conditions cause pressure changes that can stress outdoor enclosure seals to failure, allowing contaminants to enter and damage sensitive electronics.

GORE® Protective Vents effectively equalize pressure and reduce condensation in sealed enclosures, while keeping out solid and liquid contaminants. They can improve the safety, reliability and service life of outdoor electronic devices.

### A VENTING PORTFOLIO FOR ANY APPLICATION

GORE® Protective Vents Snap-In Series delivers robust venting performance and consistent, long-lasting protection, even in very harsh environments. Engineered for use in high-throughput (semi- or fully-automated) production lines, they also allow quick and easy manual installation. All Snap-In Series vents are manufactured with 100% in-line quality inspections; most are individually laser-marked for full product traceability. Four PolyVent performance options meet diverse application needs:

- **GORE® PolyVent Supra** is the low-profile solution for enclosures with limited space for vent installation, and volumes up to 0.5 liters.
- **NEW GORE® PolyVent InSet** offers fast, economical integration, and the option to inside-mount for nearly-invisible installation. For enclosure volumes up to 2 liters.
- **GORE® PolyVent Standard** offers reliable performance in many applications, for enclosure volumes up to 5 liters.
- **GORE® PolyVent High Airflow**, in hydrophobic or oleophobic versions, delivers high airflow for enclosure volumes up to 30 liters.



### REALIZE THE BENEFITS OF GORE® VENTS SNAP-IN SERIES:

- **Fast installation on any production line:** automated, semi-automated or manual.
- **Reliable performance:** snap-in construction securely seats and seals the vent to the housing.
- **Durable protection:** even after immersion, the GORE™ Membrane blocks contaminant ingress.
- **Rugged durability:** engineered for chemical and temperature resistance, and hydrolytic stability.



# Protective Vents

SNAP-IN SERIES

## PRODUCT INFORMATION



<b>Product Name</b>	PolyVent Supra	PolyVent InSet
<b>Product Number</b>	VE0006GSV	PMF200271
<b>Product Performance Characteristics</b>		
Typical airflow	35 ml / min (dp = 70 mbar)	200 ml / min (dp = 70 mbar)
Laminate: membrane / backing material	ePTFE / Polyester (PET)	ePTFE / -
Membrane characteristic	Oleophobic	Oleophobic
Vent body & cap: material	Silicone	Outer hull: Silicone / Carrier ring: PA
Vent body & cap: color	Black	Outer hull: clear / Carrier ring: black
O-ring material	-	-
Installed height (to the inside)	1.5 mm	1.4 mm
Installed height (to the outside)	1.5 mm	0.0 mm (when inside-mounted)
Traceability	No	No

<b>Design and Dimensions</b>		
Units are in mm		

<b>Recommended Installation</b>		
Units are in mm		
<ul style="list-style-type: none"> <li>Install on a flat, vertical housing surface where water or other contaminants will not pool.</li> <li>Install vent with cap on exterior of housing.</li> <li>New PolyVent InSet is designed to be mounted from inside the enclosure. (It can also be mounted from outside, but inside-mounting is recommended.)</li> </ul>		

## ENVIRONMENTAL PERFORMANCE

GORE® Vents Snap-In Series have been tested by independent laboratories and have been verified to meet these performance standards.

All certificates are available upon request.



### Ingress Protection Testing

Vent protection against ingress of particulates and water

METHOD:

- IEC 60529
  - IP65 (PolyVent Supra only)
  - IP66 (PolyVent InSet, Standard and High Airflow only)
  - IP67
  - IP68 (extended immersion: 2 meters for 1 hour)
  - IP69k (PolyVent Standard and High Airflow only)



### Temperature Testing

Vent durability in a range of temperatures

METHODS:

- IEC 60068-2-1 (to -40 °C)
- IEC 60068-2-2 (to +125 °C)
- IEC 60068-2-14 (cycling: -40 °C to 125 °C)



### Humidity Testing



Vent durability in hot, humid environments (accelerated aging test)

METHOD:

- IEC 60068-2-78
- TEST CONDITIONS:
- 85 °C
  - 85% relative humidity
  - 1,000 hours



PolyVent Standard	PolyVent High Airflow	
PMF200128	PMF200484	PMF200521
450 ml / min (dp = 70 mbar)	2500 ml / min (dp = 70 mbar)	2000 ml / min (dp = 70 mbar)
ePTFE / Polyester (PET)	ePTFE / Polyester (PET)	ePTFE / Polyester (PET)
Oleophobic	Hydrophobic	Oleophobic
Polybutylene Terephthalate (PBT)	Polybutylene Terephthalate (PBT)	Polybutylene Terephthalate (PBT)
Black (similar to RAL 9004)	Black (similar to RAL 9004)	Black (similar to RAL 9004)
EPDM 50 Shore A	EPDM 50 Shore A	EPDM 50 Shore A
2.9 mm	2.9 mm	2.9 mm
5.7 mm	5.7 mm	5.7 mm
Yes: Individually laser-marked	Yes: Individually laser-marked	Yes: Individually laser-marked

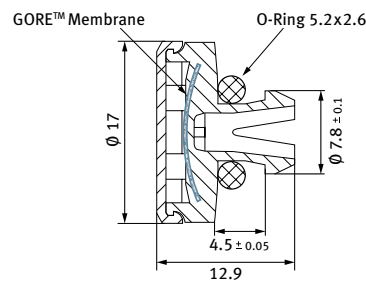

**✓ Salt Fog Testing**

Vent resistance to salty environments

METHODS:

- IEC 60068-2-11 (salt fog)
- IEC 60068-2-52 (cyclic salt fog)

**✓ Corrosive Gas Testing**

Vent durability in corrosive gas environment (e.g., NO<sub>x</sub>, SO<sub>x</sub>, H<sub>2</sub>S, Cl<sub>2</sub>)

METHOD:

- GR-3108-CORE

**✓ Vibration Testing (not applicable to PolyVent Supra)**

Vent resistance against vibration

METHOD:

- ETSI EN 300 019-2-2
- IEC 60068-2-64

**✓ Flammability Testing**

Resistance to open flame and radiant heat

METHOD:

- UL 94 V-0 PolyVent InSet carrier ring
- UL 94-HB PolyVent Standard and High Airflow caps and bodies

**✓ UV Resistance Testing (not applicable to PolyVent Supra)**

Vent resistance to ultraviolet light

METHOD:

- ASTM G155-05a (1,000 hours)



# Protective Vents


SNAP-IN SERIES

## THE SCIENCE BEHIND THE SOLUTION

GORE® Protective Vents incorporate a membrane of expanded polytetrafluoroethylene (ePTFE). This unique membrane is constructed with billions of pores 700 times larger than an air molecule. These pores allow air to flow freely in and out of the housing, which prevents stress on seals. At the same time, the membrane pores — which are 20,000 times smaller than a drop of water — serve as a barrier against water, dirt and debris. GORE® Protective Vents can be designed with a variety of specific properties for maximum performance in any venting application.

### The GORE™ Membrane is:

- chemically inert
- UV-resistant
- non-shedding
- temperature-resistant

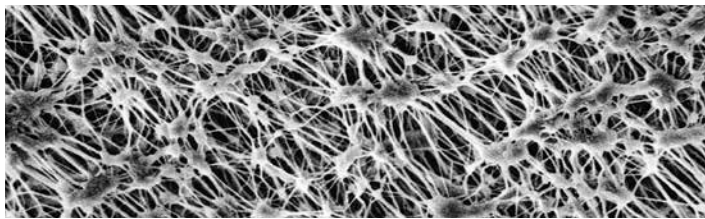

Gore's expanded PTFE membrane magnified 40,000 times.

## ROHS INFORMATION

W. L. Gore & Associates declares that the products listed in this document are below the thresholds established in EU Commission Decision Directive 2011/65/EC, Directive 2002/95/EC (RoHS) and Directive 2003/11/EC.

## INTERNATIONAL CONTACTS

Australia	+61 2 9473 6800	Mexico	+52 81 8288 1281
Benelux	+49 89 4612 2211	Scandinavia	+46 31 706 7800
Brazil	+55 11 5502 7800	Singapore	+65 6733 2882
China	+86 21 5172 8299	South Africa	+27 11 894 2248
France	+33 1 5695 6565	South America	+55 11 5502 7800
Germany	+49 89 4612 2211	Spain	+34 93 480 6900
India	+91 22 6768 7000	Taiwan	+886 2 2173 7799
Italy	+39 045 6209 240	Turkey	+90 216 393 5749
Japan	+81 3 6746 2572	United Kingdom	+44 1506 460123
Korea	+82 2 393 3411	USA	+1 410 506 7812

### W. L. Gore & Associates GmbH

Hermann-Oberth-Straße 26 • 85640 Putzbrunn • Germany  
Tel.: +49 89 4612 2211 • Fax: +49 89 4612 2302  
E-mail: protectivevents@wlgore.com

[gore.com/protectivevents](http://gore.com/protectivevents)

## ABOUT W. L. GORE & ASSOCIATES

Well known for waterproof, breathable GORE-TEX® fabric, Gore is a technology-driven company focused on product innovation. The company's portfolio includes everything from high-performance fabrics and implantable medical devices to industrial manufacturing components and aerospace electronics. Gore products have remained at the forefront of creative solutions because they are engineered specifically for challenging applications requiring durable performance where other products fail.

For almost thirty years, Gore has delivered venting solutions for a variety of applications installed in rugged environments throughout the world — applications such as solar, lighting, security, telecommunication and other electronic systems; automotive and heavy-duty vehicles; and chemical and agricultural packaging. Engineered with the latest materials and technology, GORE® Protective Vents are backed by years of research and testing to help extend product life and enhance reliable performance — all to ensure that these venting products maximize performance and extend the life of products used in the most demanding applications.

Headquartered in the United States, Gore employs approximately 10,000 associates in 30 countries worldwide. In Europe, Gore started its first business operations only a few years after the Enterprise's founding in 1958.

**Learn more at [gore.com](http://gore.com).**

**FOR INDUSTRIAL USE ONLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.**

All technical information and advice given here are based on Gore's previous experiences and/or test results. Gore gives this information to the best of its knowledge, but assumes no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. The above information is subject to change and is not to be used for specification purposes. Gore's terms and conditions of sale apply to the sale of the products by Gore.

GORE, GORE-TEX and designs are trademarks of W. L. Gore & Associates.  
© 2011 - 2016 W. L. Gore & Associates GmbH

