
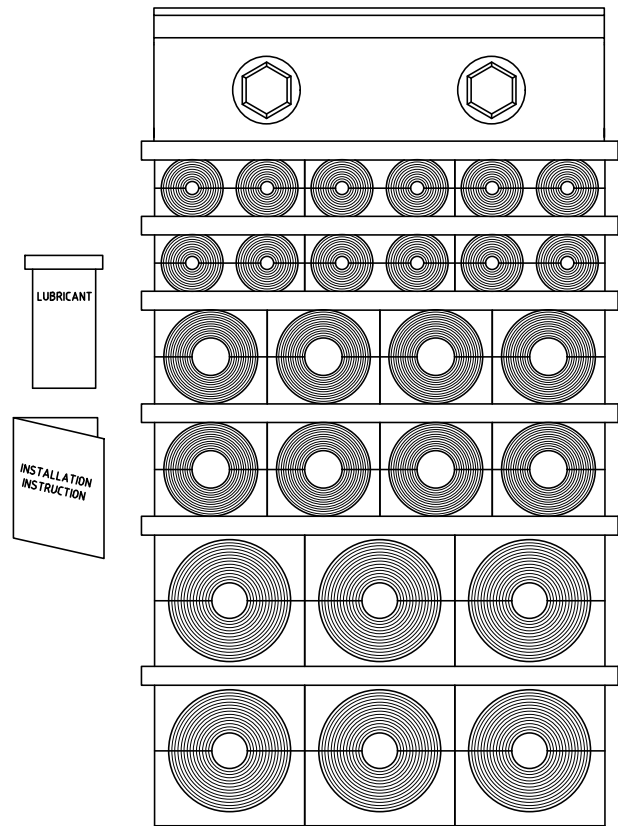
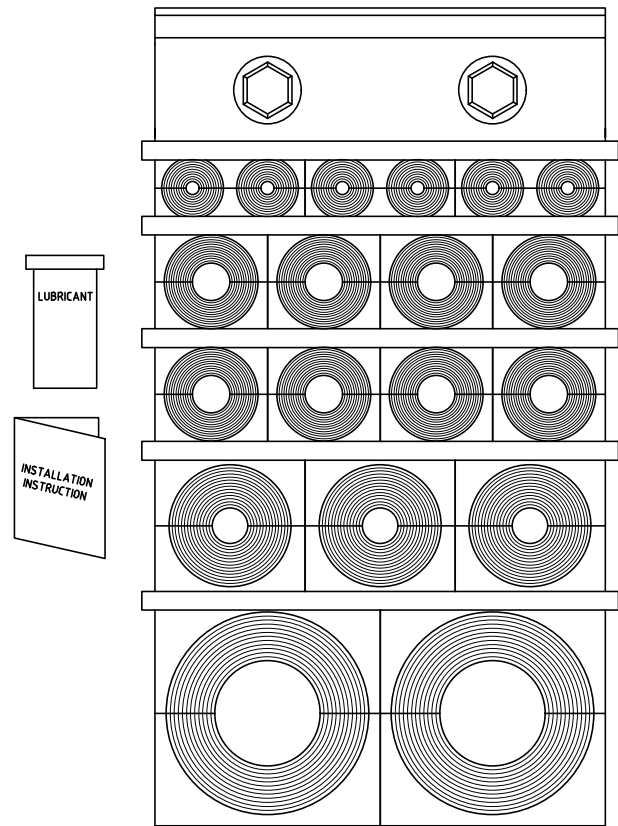


洛克赛克保留所有权利。未经授权严禁复制、使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

Rev.10

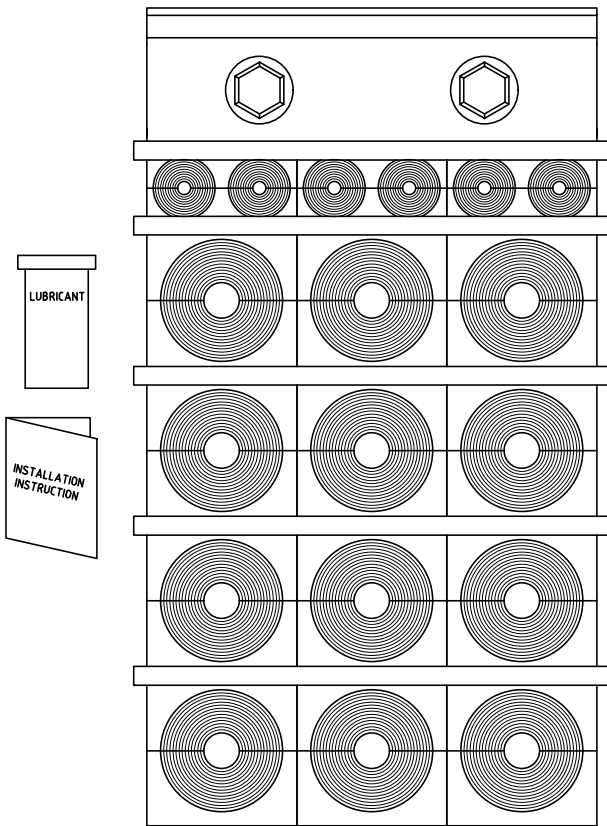

B SEALING KIT 6/18

- 12x RM 40 10-32 RANGE $\phi 0+9,5-32,5$
- 3x RM 20w40 RANGE $\phi 0+3,5-16,5$
- 5x STAYPLATE
- 1x WEDGE 120
- 1x LUBRICANT
- 1x INSTALLATION INSTRUCTION

SEALING KIT 6/19

- 2x RM 60 RANGE $\phi 0+28-54$
- 3x RM 40 10-32 RANGE $\phi 0+9,5-32,5$
- 8x RM 30 RANGE $\phi 0+10-25$
- 3x RM 20w40 RANGE $\phi 0+3,5-16,5$
- 5x STAYPLATE
- 1x WEDGE 120
- 1x LUBRICANT
- 1x INSTALLATION INSTRUCTION

SEALING KIT 6/26

- 6x RM 40 10-32 RANGE $\phi 0+9,5-32,5$
- 8x RM 30 RANGE $\phi 0+10-25$
- 6x RM 20w40 RANGE $\phi 0+3,5-16,5$
- 6x STAYPLATE
- 1x WEDGE 120
- 1x LUBRICANT
- 1x INSTALLATION INSTRUCTION

NOTE:
SEALING KITS ARE AVAILABLE IN GALVANIZED AND ACID PROOF STAINLESS STEEL VERSIONS.

B	DESCRIPTION CHANGED.	2018-06-29	se-jenboh
Rev	Type of revision	Date	Sign

Item	Qty	Designation	Specification		Net Weight
General tolerance ISO 1181-1/2 EN ISO 1903-01	Machined details EN ISO 1871-1 EN ISO 1903-01	General surface roughness Ra 12,5	Designed by se-jenboh	Created Date 2018-04-13	Latest save date 2018-06-29
Title SEALING KIT 6/18, 6/19, 6/26			Format A2	Scale 1:1	Sheet no -
www.roxtec.com			Drawing number S1532066		Projection method 1st angle Rev B