



# **MASTER MHN-SA**

# MASTER MHN-SA 2000W/956 400V XW HO UNP/1

Compact quartz metal halide lamps with double-pinch

#### **Warnings and Safety**

- $\cdot$  Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**

General Information					
Cap-Base	X830R [ X830R]				
Operating Position	P15 [ Parallel +/-15D or Horizontal(HOR)]				
Life to 5% Failures (Nom)	1700 h				
Life To 10% Failures (Nom)	2300 h				
Life to 20% Failures (Nom)	3000 h				
Life to 50% Failures (Nom)	5000 h				
Light Technical					
Color Code	956 [ CCT of 5600K]				
Luminous Flux (Rated) (Nom)	226000 lm				
Color Designation	Daylight				
Lumen Maintenance 1000 h (Nom)	96.5 %				
Lumen Maintenance 2000 h (Nom)	92.5 %				
Lumen Maintenance 5000 h (Nom)	78 %				
Chromaticity Coordinate X (Nom)	330				
Chromaticity Coordinate Y (Nom)	366				
Correlated Color Temperature (Nom) 5600 K					

Luminous Efficacy (rated) (Nom)	108 lm/W			
Color Rendering Index (Nom)	81			
Operating and Electrical				
Lamp supply voltage	400 V [ 400]			
Power (Nom)	2095.0 W			
Lamp Current Run-Up (Max)	17 A			
Lamp Current (EM) (Nom)	11.8 A			
Ignition Supply Voltage (Min)	360 V			
Voltage (Max)	220 V			
Voltage (Min)	185 V			
Voltage (Nom)	205 V			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Bulb Finish	Clear			


Datasheet, 2020, November 25 data subject to change

# **MASTER MHN-SA**

Cap-Base Information	-			
Approval and Application				
Energy Efficiency Label (EEL)	A+			
Mercury (Hg) Content (Nom)	215 mg			
Energy Consumption kWh/1000 h	2305 kWh			
UV				
Specific Eff. Radiant Power	60 mW/klm			
Luminaire Design Requirements				
Bulb Temperature (Max)	1015 °C			
Pinch Temperature (Max)	350 °C			

Product Data					
Full product code	871829124183600				
Order product name	MASTER MHN-SA 2000W/956 400V XW HO				
	UNP/1				
EAN/UPC - Product	8718291548423				
Order code	928195105129				
Numerator - Quantity Per Pack	1				
Numerator - Packs per outer box	1				
Material Nr. (12NC)	928195105129				
Net Weight (Piece)	90.000 g				


# Dimensional drawing

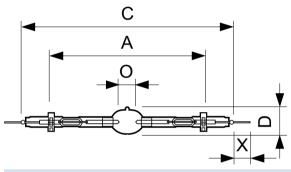

MHN-SA 2000W/956 400V XW HO

Product	D (max)	0	X	Α	C (max)
MASTER MHN-SA 2000W/956	41 mm	25 mm	34 mm	226 mm	369 mm
400V XW HO UNP/1					


### Photometric data

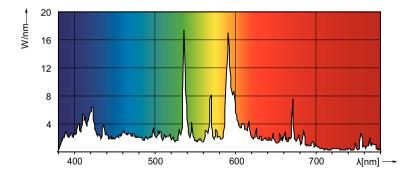


LDPO\_MHN-SA\_0004-Spectral power distribution Colour

## **MASTER MHN-SA**

### Lifetime

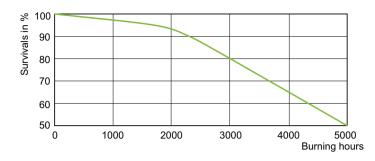

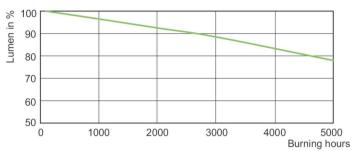

LDLE\_MHN-SA\_0006-Life expectancy diagram

LDLM\_MHN-SA\_0006-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.