# **Locating / Seating Pins • DIN 6321** 22630.0032



# **Product Description**

Cylindric locating pins for locating workpieces in toleranced holes and also to be used as stops and feet.


Flattened locating pin used to overcome differences in tolerances, between holes or to position an element in one direction only.


The bearing surface of the seating pin has no centre (picture 1).

#### **Material**


· Tool steel, hardened, ground

# **Drawing**





Erwin Halder KG







picture 1

### **Order information**


Dimensions					Location hole	I	Art. No.
d <sub>1</sub>	I <sub>1</sub>	d <sub>2</sub>	l <sub>2</sub>	I <sub>4</sub>	D <sub>1</sub>	_	
g6		n6			H7		
[mm]					[mm]	[g]	
locating pin, cylindric, DIN 6321, form B – picture 2							
locating pin, cylin	dric, DIN 6321, for	m B – picture 2					



www.halder.com Published on: 8.7.2022

Page 1 of 2

# **Application example**

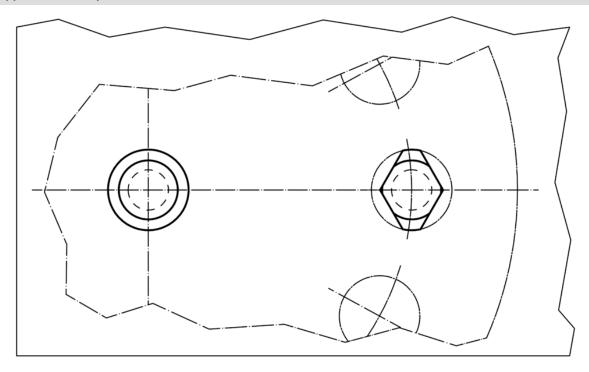

## Compliance

#### **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863

### **Does not contain SVHC substances**

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 10.06.2022

Erwin Halder KG

## **Does not contain Proposition 65 substances**

No Proposition 65 substances included https://www.P65Warnings.ca.gov/

### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2

Published on: 8.7.2022