



**Model Number**

LFL2-CK-U-PUR5-EMS

**Features**

- **Switch element: Micro switch, mercury-free**
- **Limit value detection for fluids**
- **Sleeve design: small diameter, mounting through G1 tap hole possible**

**Description**

The microswitch (change-over contact) is integrated in a PP float and is activated in the event of deviations from the horizontal position. The switching ball in the float, which moves along an axis, activates the microswitch.

**Accessories**

- LFL-Z132-EMS**  
Gland screw connection
- LFL-Z32-EMS**  
Ballast weight for float switch

**Technical Data**

**Electrical specifications**

Contact loading	250 V AC/3 A; 150 V DC/0.25 A resistive load; 60 V DC/1 A resistive load
Rated insulation voltage	300 V
Pulse withstand voltage	4 kV

**Directive conformity**

Low voltage Directive 2014/35/EU	EN 60947-5-1:2004 + Cor.:2005 + A1:2009
----------------------------------	-----------------------------------------

**Conformity**

Degree of protection	IEC 60529:2001
----------------------	----------------

**Application**

Description	microswitch with switching ball, change-over contact
-------------	------------------------------------------------------

**Function and system design**

Equipment architecture	This device may be used with any sequential circuit, as long as the circuit can support the electrical circuit values of the switching elements.
------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------

**Operating conditions**

Installation conditions	
Installation instructions	range of application and minimum length between mounting and float: ≥ 100 mm (4 inch), preferred for fuels, heating oils, oily fluids mounting: - The float switch is mounted either from sideways through a cable gland ≥ G1A into the vessel or - by means of a counter weight or rods (e. g. float switch combination) from the top. The pivot of the cable should always be horizontal.

**Process conditions**

Process pressure (static pressure)	≤ 3 bar (43.5 psi) at 20 °C (68 °F)
Density	≥ 0.8 g/cm <sup>3</sup>

**Ambient conditions**

Ambient temperature	5 ... 70 °C (41 ... 158 °F)
Storage temperature	-25 ... 70 °C (-13 ... 158 °F)
Altitude	≤ 2000 m above MSL

**Mechanical specifications**

Degree of protection	IP68
Cable	
Length	L 5 m


**Mechanical construction**

Material	float: PP (Polypropylene) cable: PUR, highly flexible (3 x 0.50 mm <sup>2</sup> )
Switching point	switch angle, measured against the horizontal: - upper switch point +25° ±10° - lower switch point -14° ±10°


**General information**

Supplementary information	Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com.
---------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Dimensions**

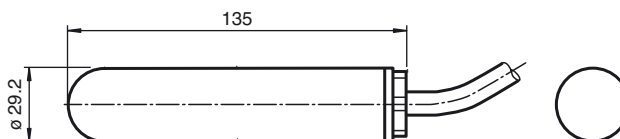


**Electrical Connection**



Release date: 2016-06-01 16:22 Date of issue: 2016-06-01 262201\_eng.xml

### Application

Controlling pumps and valves with one switch or signal level height or limit

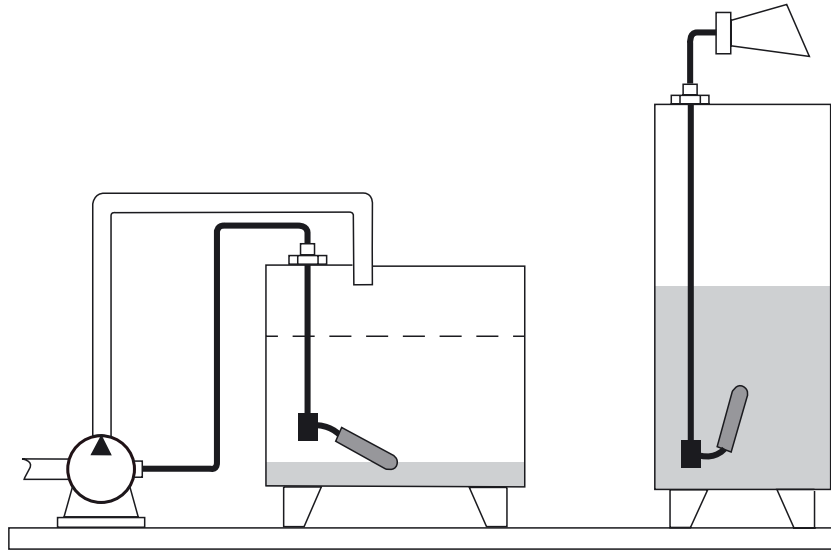

### Mounting

Mount the float switch in the following way:

- Insert the float switch into the tank through a tapped hole G1A.
- Screw the float switch with the gland screw connection G1A.
- If it is installed from above, use the counter weight LFL-Z32 or LFL-Z33 for mounting.



- *The fulcrum of the cable should always be horizontal.*
- i *The cable length between the fixture and the floating body is dependent on the cable type.*
- When using the counter weight, place an extra strain relief (e. g. a knot in the cable) behind the gland screw connection – on the outside of the tank.*