


## Aluminium Housed Power Resistors

### Type THS Series

#### Type THS Series



Tyco are the leading European supplier of standard and custom designed aluminium housed resistors for general-purpose use, power supplies, power generation and the traction industry. The THS is a range of extremely stable, high quality wire wound resistors capable of dissipating high power in a limited space with relatively low surface temperature. The power is rapidly dissipated as heat through the aluminium housing to a specified heatsink. The resistors are made from quality materials for optimum reliability and stability. Tyco can test resistors to conform to relevant international, MIL or customer specifications.

#### Key Features

- Established product with proven reliability
  - Leading the way with over 50 years of design and manufacturing experience
- 10 Watts to 50 Watts
- Versatile product
  - Bench mark in every industry

#### Applications

- Braking Resistor
- Balancing Resistor
- Capacitor Charging & Discharging
- Crowbar
- Filter
- Electrical Machinery general use
- Available through Distribution

#### Characteristics - Electrical THS - 10 Watts to 50 Watts


	THS10	THS15	THS25	THS50
Dissipation @ 25°C with Heatsink (Watts):	10	15	25	50
Without Heatsink:	5.5	8	12.5	20
Ohmic Value Min (Ohms):	R01	R01	R01	R01
Max:	10K	15K	36K	100K
Maximum Working Voltage (DC or ACrms) Volts:	160	265	550	1250
Dielectric Strength (AC Peak) Volts:	1400	1400	2500	2500
Stability (% resistance change, 1000 hours) (%):	1	1	1	1
Standard Heatsink - Area (mm <sup>2</sup> ):	41500	41500	53500	53500
Thickness (mm):	1	1	1	1
Number of Mounting Holes:	2 hole	2 hole	2 hole	2 hole

#### Characteristics - Electrical


<b>Long Term Stability:</b>	For improvements in long-term stability, resistors must be derated as follows; for 50% of stated ΔR maximum dissipation must not exceed 70% of rating; for 25% of stated ΔR maximum, dissipation must not exceed 50% of rating
<b>Insulation Resistance:</b>	Dry: 10,000MΩ minimum. After moisture test: 1000MΩ minimum.
<b>Heat Dissipation:</b>	Although the use of proprietary heat sinks with lower thermal resistance is acceptable, up rating is not recommended. The use of proprietary heat sink compound to improve thermal conductivity is recommended for optimum performance of all sizes
<b>Specification:</b>	Temperature coefficient below 100R, 50ppm/°C Temperature coefficient above 100R, 30ppm/°C Tolerance, 5% standard

#### Product Specifications - THS10 - THS50


Type	L
THS10, 15	7
THS25, 50	10



#### Dimensions - THS10 - THS50

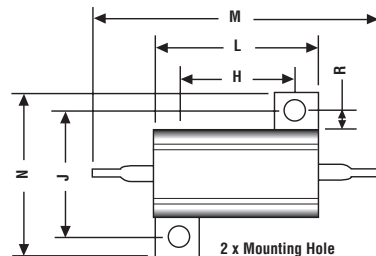

THS10 - 2.4mm	THS25 - 3.3mm
THS15 - 2.4mm	THS50 - 3.3mm




Type	H±0.3	J±0.3	L Max	M Max	N Max	P Max	R Min	T±0.5	U Max
THS10	11.3	12.4	17.0	30.0	17.0	9.0	1.9	3.4	2.5
THS15	14.3	15.9	21.0	36.5	21.0	11.0	1.9	5.2	3.2
THS25	18.3	19.8	29.0	51.8	28.0	15.0	2.8	7.2	3.2
THS50	39.7	21.4	51.0	72.5	30.0	17.0	2.8	7.9	3.2


# Aluminium Housed Power Resistors

## Type THS Series


### Derating Curve THS10 to THS50

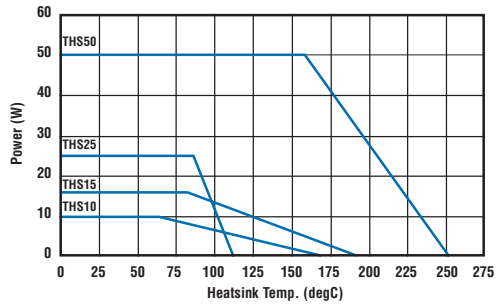

### Pulse Energy THS10 to THS50

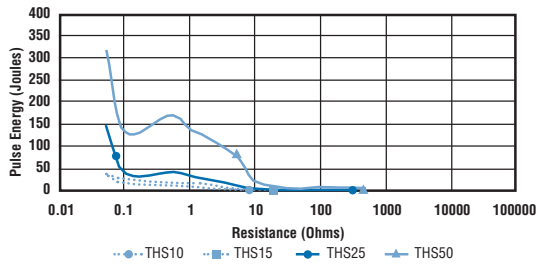


### Power Overload

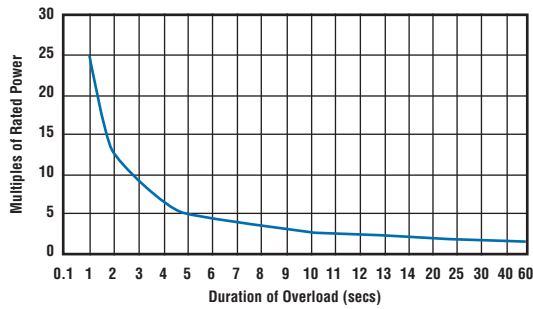

This graph indicates the amount that the rated power (at 20°C) of the standard HS Series resistor may be increased for overloads of 100mS to 60S

### Surface Temperature Rise

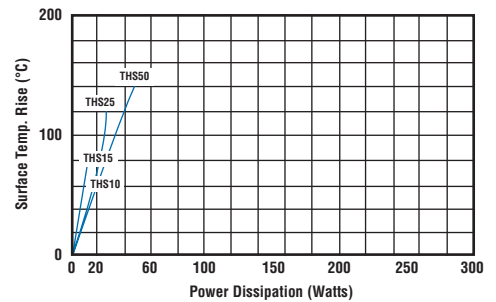

For resistor mounted on standard heatsink, related to power dissipation

### How to Order

THS	50	680R	J
<b>Common Part</b>	<b>Power Rating</b>	<b>Resistance Value</b>	<b>Tolerance</b>
THS- Standard NTHS - Low Inductance	10 Watt = THS10 15 Watt = THS15 25 Watt = THS25 50 Watt = THS50	0.1ohm (100 mille ohms) R10 1ohm (1000 mille ohms) 1R0 1K (1000 ohms) 1K0	J - 5%