


Product description	M12-A female cable connector, Contacts: 3, shielded, moulded cable, IP67, UL, PUR black, 3 x 0.34 mm ² , 10 m
Area	M12-A series 763
Part no.	77 3530 0000 50703-1000

Illustration



Scale drawing

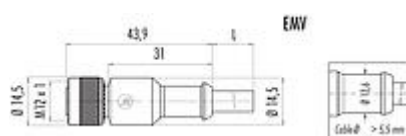

Contact arrangement (Plug-in side)



- 1 brown
- 2 not assembled
- 3 blue
- 4 black

Shielded versions; shield = housing

Technical data

General features

Part no.	77 3530 0000 50703-1000
	Alternative part no.: 79 3530 35 04
Connector design	female cable connector
Cable length	10 m
Version	female straight
Connector locking system	screw
Termination	moulded cable
Degree of protection	IP67
Cross-sectional area	0.34 mm ² / AWG 22
Temperature range from/to	-25 °C / 90 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	179.00
Customs tariff number	85444290

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Rated current (40 °C)	4,0 A
Insulation resistance	≥ 10 ¹⁰ Ω
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	shielded
Shield connection	Shield on the threaded ring

Product data sheet

Automation technology - sensors and actuators



Product description	M12-A female cable connector, Contacts: 3, shielded, moulded cable, IP67, UL, PUR black, 3 x 0.34 mm ² , 10 m
Area	M12-A series 763
Part no.	77 3530 0000 50703-1000

Material

Housing material	PUR
Contact body material	PUR
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Locking material	CuZn (brass)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	35097a28-2a57-4e37-bda5-6d3b3cffc3a2

Authorization/approvals

Approvals	UL
-----------	----

Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60529:1991;EN 60204-1:2018)
RoHS Directive	2011/65/EU (EN 50581:2012)

Cable data - Structure of the cable

Cable diameter	4.6 mm
Cross section	3 x 0.34 mm ²
Sheath material	PUR
Single-lead insulation	PP9Y halogen-free
Single-lead structure	42 x 0.10 mm
Cable color	black

Cable data - Electrical properties

Conductor resistance	60 Ω/Km (20°C)
----------------------	----------------

Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
Bending radius, moving cable	≥ 10 x Ø
Bending cycles	>2 million
Permitted acceleration	5 m/s ² + 1 m/s ²
Travel distance, horizontal	5 m/s ² -> 5 m
Travel distance, vertical	5 m/s ² -> 2 m
Travel speed	≤ 200 m/min (5 m horizontal distance)

Cable data - Thermal properties

Temperature range cable in move from/to	-25 °C / 90 °C
---	----------------

Product data sheet

Automation technology - sensors and actuators



Product description	M12-A female cable connector, Contacts: 3, shielded, moulded cable, IP67, UL, PUR black, 3 x 0.34 mm ² , 10 m
Area	M12-A series 763
Part no.	77 3530 0000 50703-1000

Temperature range cable fixed from/to -50 °C / 90 °C

Cable data - Other features

Halogen free	Yes
--------------	-----

Product description	M12-A female cable connector, Contacts: 3, shielded, moulded cable, IP67, UL, PUR black, 3 x 0.34 mm ² , 10 m
Area	M12-A series 763
Part no.	77 3530 0000 50703-1000

General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).