


# AMPMODU | AMPMODU IV/V

TE Internal #: 280358 Housing, Receptacle, Wire-to-Board, 2 Position, .1 in [2.54 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Signal, AMPMODU IV/V

### View on TE.com >



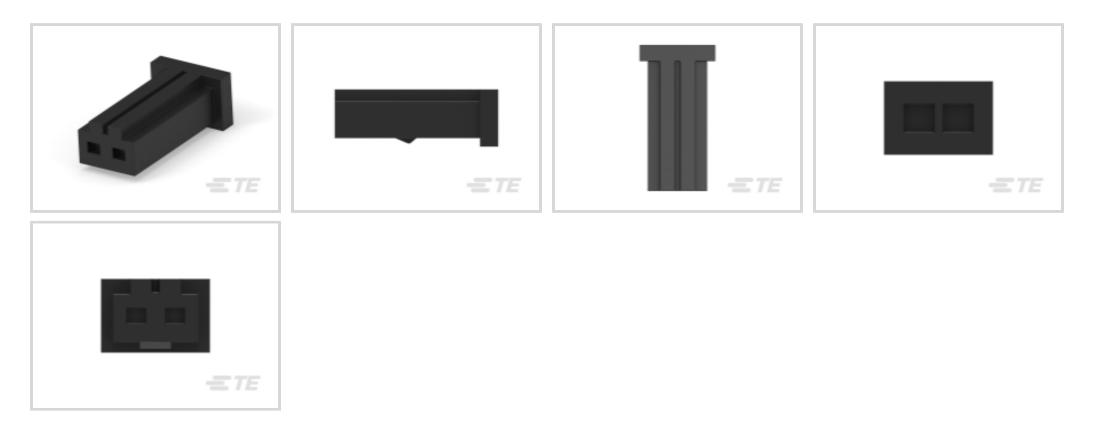

Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Board Number of Positions: 2

Centerline (Pitch): 2.54 mm [.1 in]

# Features



# Product Type Features

Connector Product Type	Housing					
Connector & Housing Type	Receptacle					
Connector System	Wire-to-Board					
Connector & Contact Terminates To	Wire & Cable					
Configuration Features						
Number of Positions	2					
Number of Rows	1					
Body Features						
Primary Product Color	Black					
Contact Features						
Contact Layout	Inline					
Contact Type	Socket					
Contact Base Material	Copper Alloy					

Housing, Receptacle, Wire-to-Board, 2 Position, .1 in [2.54 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Signal, AMPMODU IV/V



# **Termination Features**

Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Detent Latching
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Entry Configuration	Both Ends Closed
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Connector Length	7.1 mm
Connector Height	3.1 mm[.12 in]
Row-to-Row Spacing	2.54 mm[.1 in]
Usage Conditions	
Operating Temperature Range	-40 - 80 °C[-40 - 176 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1500
Packaging Method	Box
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 2 Position, .1 in [2.54 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Signal, AMPMODU IV/V




China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC			
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free			
Solder Process Capability	Not applicable for solder process capability			

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

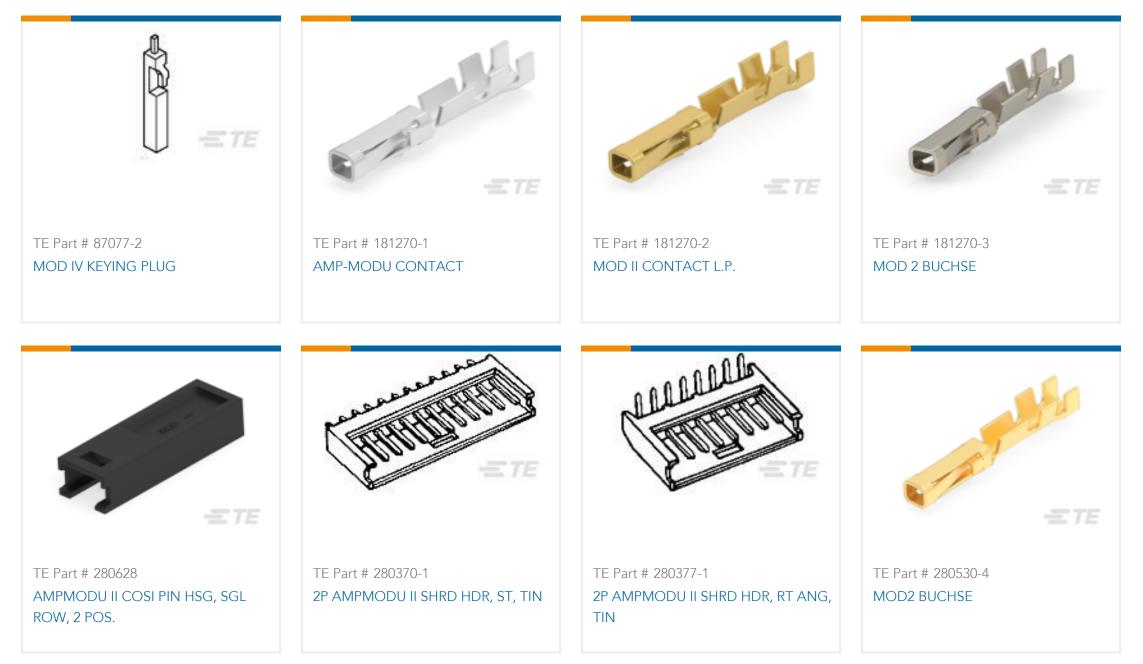

Housing, Receptacle, Wire-to-Board, 2 Position, .1 in [2.54 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Signal, AMPMODU IV/V





# Also in the Series | AMPMODU IV/V

	and the second s		And
Automotive Housings(1)	Backplane Connector Housings(1)	Connector Caps & Covers(18)	Connector Contacts(321)

Connector Hardware(13)


Connector Strain Relief(2)

Insertion & Extraction Tools(4)

PCB Headers & Receptacles(931)

Housing, Receptacle, Wire-to-Board, 2 Position, .1 in [2.54 mm] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Signal, AMPMODU IV/V



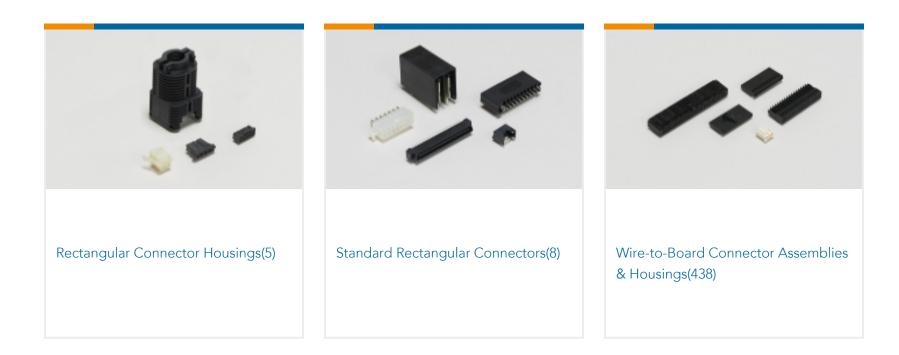

# Customers Also Bought



9W STD M/OX 5% 620R	EP 9W (S) 680R 5%	RLC73PV 2E R02 1% 5K RL	TLRP 2512 3.0W R004 1% 25PPM 4K RL

# Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_280358\_Z.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_280358\_Z.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_280358\_Z.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.