FIBOX
Enclosing innovations

ARCA 304015

Sample photo

Order symbol:	ARCA 304015	**EAN:**	6418074079336
Product nbr:	8120022	**El. number:**	
Description:	Cabinet, PC	Finland:	3423119
Remarks:	Grey cover, 2-point locking, hinges on the short side	Denmark:	8212091207
		Sweden:	2500111
		Norway:	

Including: Cabinet base, door with PUR gasket, mounting plate, screws for mounting plate. 3mm double bit lock(s) with key.
S versions with swinghandle 3-point locking system. F versions with flange opening. Door guide included.

Dimensions:	**Length**	**Width**	**Height**
mm:	300	400	150
inch:	11.8	15.7	5.9

Materials:

Material:	Polycarbonate
Base colour:	RAL 7035
Cover colour:	RAL 7035
Gasket material:	PUR

Temperatures:

Short term:	-40 … 120 °C
Continuous:	-40 … 80 °C
Short term:	-40 … 250 °F
Continuous:	-40 … 175 °F

Accessories:

MPS ARCA 4030	Mounting plate
MPP ARCA 4030	Mounting plate perforated
MPX ARCA 4030	Mounting plate
DRS ARCA 304015	DIN rail frame set
DRS ARCA 304021	DIN rail frame set
IDS ARCA 3040	Inner door set
PMK ARCA 40	Pole mounting kit

Rating:

Ingress Protection (EN 60529): IP 66
Impact Resistance (EN 62262): IK 10 +35°C /IK 08 -25°C
Electrical insulation: Totally insulated
Halogen free (DIN/VDE 0472, Part 815): Yes
UV resistance: UL 508
Glow Wire Test (IEC 695-2-1) °C: 960

Certificates:

SGS Fimko

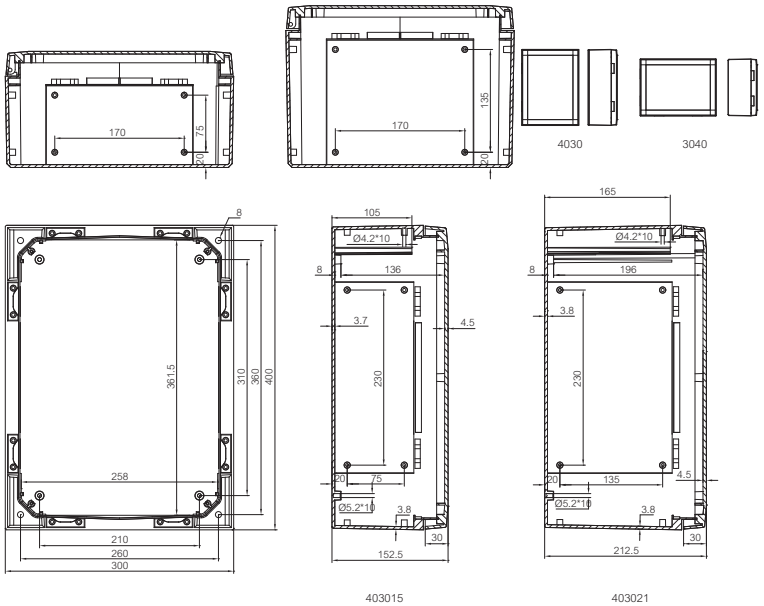

© Fibox Oy, Data subject to change without notice (printed: 1.10.2014)