


PROFESSIONAL LED INDICATORS - Ø 13mm Mounting



- Robust stainless steel housing
- Low profile styling
- Flying lead terminations available
- Sealed to IP67

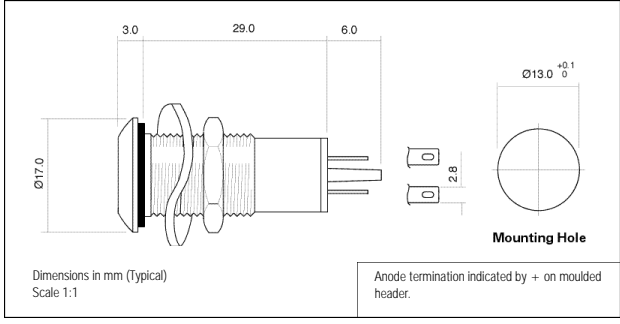

528 SERIES
MLQ = 10



Ordering Information & Typical Technical Characteristics (Ta = 25°C)
Mean Time Between Failure = 100,000 Hours. Luminous intensity figures refer to the unmodified discrete LED.

PART NUMBER	COLOUR	LENS	VOLTAGE DC V _f @20mA	CURRENT DC I _{opr}	LUMINOUS INTENSITY I _v @20mA	WAVE LENGTH λ	VIEWING ANGLE	OPERATING TEMP Topr	STORAGE TEMP Tstg
HIGH INTENSITY									
528-501-21	Red	Coloured Diffused	12	20	2750	660	Wide	-40 ~ +85	-50 ~ +100
528-521-21	Yellow		12	20	4500	590			
528-532-21	Green		12	20	6000	525			
528-930-21	Blue		12	20	2000	470			
528-997-21	White		12	20	3000	•			
528-501-22	Red		24	20	2750	660			
528-521-22	Yellow		24	20	4500	590			
528-532-22	Green		24	20	6000	525			
528-930-22	Blue		24	20	2000	470			
528-997-22	White		24	20	3000	•			
UNITS			Vdc	mA	mcd	nm		°C	°C

• = Typical emission colour: x=0.31, y=0.32. Colour temperature 8000K. Intensities (I_v) and colour shades of white (x,y co-ordinates) may vary between LEDs within a batch.
Please note - This product is also available at 28 and 48Vdc, 110 and 230Vac. Please contact our Sales department for further details.

Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You! Making Light Work For You!

