

## High-feed milling cutters with thread

For indexable milling inserts: XCN. 0703.., XCN. 09T3..

**ATORN**<sup>®</sup>

### Application


Dramatically increase your productivity and make great cost-savings – with the high-feed milling cutters. The unique cutting geometries provide extremely smooth running and low cutting forces at maximum feed rates. Our extensive program offers solutions for a wide range of applications in modern machine tools, whether in die and mould making or in general mechanical engineering.

### Execution

- With screw-in thread
- Wear-resistant, nickel-plated version
- Robust supports
- With internal cooling
- Variable pitch
- Tightening torque (indexable insert) M3.5 = 3.5 Nm

### Advantage

- Broad range of application
- Minimum-vibration milling even for long mounting lengths
- Tooth feed possible up to 3 mm
- Reduces production times

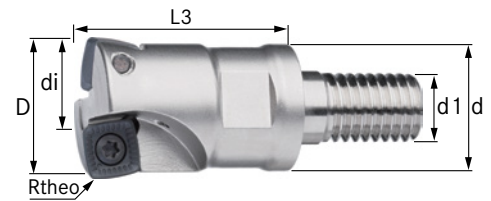

<b>Art. No.</b>	<b>16026 249</b>
<b>Max. cutting edge diameter</b>	32 mm
<b>Min. cutting edge diameter</b>	17 mm
<b>Clearance length</b>	43 mm
<b>Thread dimension</b>	M16
<b>Radius, theoretical</b>	2.5 mm
<b>max. ap</b>	1.2 mm
<b>Number of cutting edges</b>	3 PCS
<b>Suitable indexable insert no.</b>	2

### EAN-Code

4050293405613