




**Customer: ELFA AB**  
56-126-68

**Transf. No. AA-58055**  
**Designed: 1995-03-24 / ts**

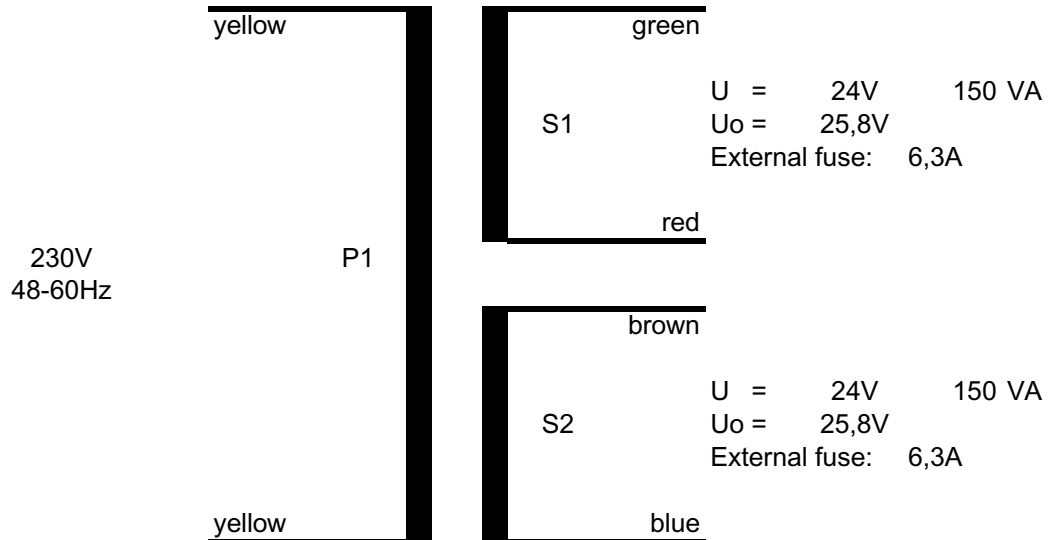

#### Classification

Protection against electrical shock:	Isolating Transformer
Protection index:	IP00
Protection against short-circuit and abnormal use:	Non-short-circuit proof
Time of operation:	Continuously
Intended use:	Incorporated
Ambient temperature / Material Classification:	Ta40/E

Assembling:	1 pc	Metal Washer	D = 90	mm
	2 pcs	Rubber Pads	D = 90	mm

Dimensions:	OD = 115	mm
	H = 65	mm

Terminations:	Prim:	Multistranded Wire Style 3266.	Awg 22	L = 200mm
	Sec:	Solid Copper insulated with tubes of Natvar.		L = 200mm

Label on the paper box.

	Toroid International AB	
	Transf.No.	AA-58055
	ELFA P/N:	56-126-68

Label on transformer.

	Toroid International AB		
	Transf.No.	AA-58055	
	Prim.	230V 48-60Hz ye-ye	
	Sec.	2x 24V 300 VA	
		gn-re/bn-bu	
	Fuse: 6,3A		





## EC/EEA Declaration of conformity

Type of equipment: **Isolating Transformer**

Brand name: **Toroid**

Part no: **AA-58055**

Customer: **ELFA AB** **56-126-68**

<p><i>Manufactures:</i> Toroid International (Pvt) Ltd PO Box 15, Phase 2, FTZ Katunayake, Sri-Lanka</p> <p>Toroid India Pvt Ltd Technopark Campus Trivandrum 695 581 Kerala, India</p>	<p>Toroid International AB Box 3 351 03 Växjö, Sweden</p> <p><i>Manufacture's representative within EEA:</i> Toroid International AB Box 3 351 03 Växjö, Sweden</p>
---	---

*As the manufacturer's authorised representative established within EEA, we declare that the product is in conformity with the provision of the EC directives: Low Voltage Directiven (LVD) 73/23/EEG, 93/68/EEG*

*The product fulfils the requirements according to the following harmonised standards:  
EN 61558-1, EN 60 950, EN 60 065 and IEC 601-1.*

*All transformers have been inspected and tested with approved result according to the following:*

1. Ocular inspection
2. No-load input current
3. No-load secondary voltage
4. Dielectric strength between primary an

*The product is to be regarded as a modular component to be used in an electric apparatus that in turn has to fulfil the EMC - directives.*

*The product itself does not need to be EMC approved for CE marking according to directive 89/336/EEG, 92/31/EEG and 93/68/EEG*

Date: 2003-05-07

---

Thomas Svensson / Design engineer