


PE TERMINAL WITH SPRING CONNECTION, 4
CONNECT. POINTS SECTION: 0.08 - 2.5 MM²,
WIDTH: 5.2 MM, COLOR:GREEN-YEL.

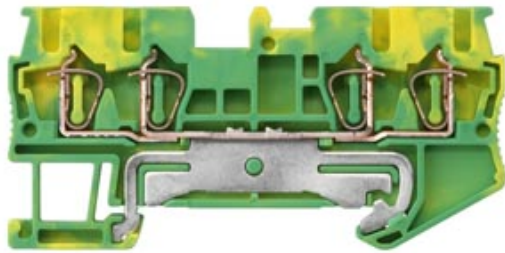

General technical data		
Insulation material		thermoplastic
Terminal contact spacing	mm	5.2
Protection class		
Combustibility class acc. to UL 94		V0
Appearance		
Color		green-yellow
Product details		
Product feature / PEN function		No
Product component / required / connection plate		No
Number		
Number of terminal levels		1
Number of terminal points / per terminal level		4
Connections		
Connectable conductor cross-section / stranded		
• minimum	mm ²	0.2
• maximum	mm ²	4
Connectable conductor cross-section		
• solid		
— minimum	mm ²	0.14
— maximum	mm ²	4
• finely stranded		
— with core end processing / minimum	mm ²	0.2

— with core end processing / maximum	mm ²	2.5
— without core end processing / minimum	mm ²	2.5
— without core end processing / maximum	mm ²	2.5
Type of electrical connection		
• 1		spring-loaded terminal
• 2		spring-loaded terminal
Position / of the terminal		
		top

Mechanical Design		
Height / with lowest-profile installation	mm	36.5
Length	mm	87
Mounting type		DIN rail 35 mm

Environmental conditions		
Ambient temperature		
• during operation / minimum	°C	-25
• during operation / maximum	°C	35

General Product Approval	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------	-------------------



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8WH20040CF07>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WH20040CF07/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH20040CF07

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

last modified:

11.03.2015