

LOW COST, HIGH ACCURACY 2 WIRE TEMPERATURE TRANSMITTER

The 300TX is a 4-20mA temperature transmitter which can be housed in a probe terminal head suitable for a DIN standard block. With ranges for thermocouple and Pt100 sensors, the units offer an exceptionally wide range of span adjustment which reduces the need for stockholding different temperature ranges.

A novel feature is the non-interactive span and zero potentiometer action which is time saving and convenient when calibrating or re-scaling.



- 4-20mA, 2 wire loop
- Low cost
- High accuracy
- In-head mounting, DIN standard fixing
- Pt100 or thermocouples type J,K,N,T,R,S
- High reliability
- Non-interactive span & zero pots for calibration
- Permits virtually unlimited length of cable run in low-cost copper
- More expensive thermocouple extension cable not required
- Rugged construction
- Effective input 'noise' rejection
- Special ranges to order
- CE compliant
- RoHS compliant

Rapid



LABFACILITY

TEMPERATURE & PROCESS TECHNOLOGY

Rapid

www.labfacility.co.uk


Specification

Ranges	Thermocouple to IEC 584	Type J	0-800°C
		Type K	0-1100°C
		Type K	0-500°C
		Type N	0-1300°C
		Type R	0 to 1400°C
		Type S	0 to 1400°C
		Type T	-50 to 50°C
		Type T	0 to 100°C
		Type T	0 to 250°C
		PT100 to IEC751,3 wire	
		0 to 200°C	
		0 to 100°C	
		-50 to 50°C	

Junctions/ sensors must be insulated from sheath


Output	4-20mA loop powered, max 30mA. Directly proportional to mV input for thermocouples. Directly proportional to temperature for Pt100.
Loop supply	12-36V dc; reverse connection protected.
Accuracy	Thermocouple ranges $\pm 0.2\%$ of span (linear to mV input) Pt100 ranges $\pm 0.1\%$ of span (linear to temperature input)
Zero drift	$\pm 0.02\%$ of span per °C
Span drift	$\pm 0.02\%$ of span per °C
Supply voltage effect	$\pm 0.03\%$ change of span over 12 to 36 voltage change
Cold junction compensation	Better than 2°C over ambient temperature range of 0 to 50°C ; rejection ratio better than 25:1
Sensor open circuit detection & indication	Upscale; output current between 23 and 27 mA. Separate, independent alarms should be used if required for process safety.

Load capability	$(V_s - 12)/0.02$ Ohm; $V_s = 12$ to 36Vdc
Ambient operating temperature	0 to 70 °C
Storage temperature	-20 to 100 °C
Zero adjustment potentiometer	$\pm 20\%$ of span, 25 turns
Span adjustment potentiometer	down to 50% of span for thermocouple input and 30% of Span for PRT100 input, 25 turns (see note 1)
Mechanical	Head mounting, dia.42mm, height 32mm, 2 mounting holes 32mm between centres

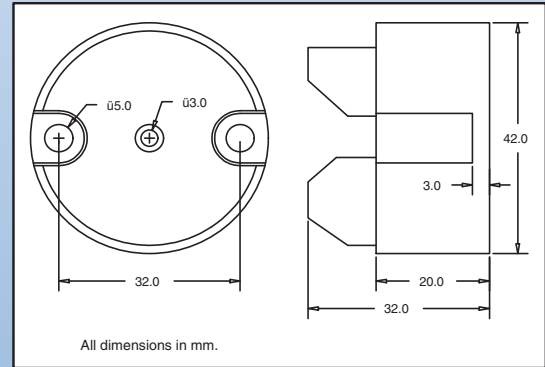


Note 1: The transmitter can be easily ranged and calibrated by means of the multi-turn zero and span adjusters in conjunction with either a mV source or standard resistance input. For example, a type K-thermocouple which has a working temperature range of 0 to 1100°C can be easily calibrated to operate between 0 to 600°C, where 4mA and 20mA represent 0 and 600°C respectively.

Thermocouple

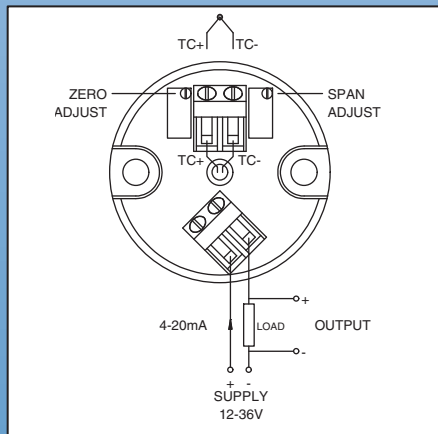

Pt100

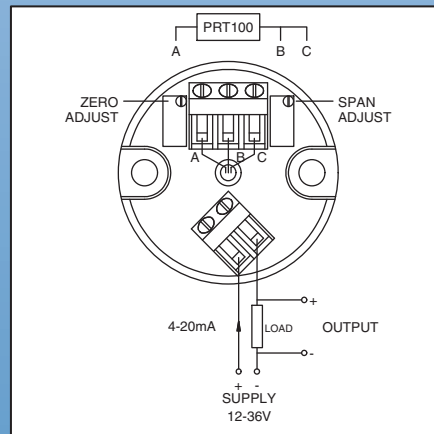

LABFACILITY
TEMPERATURE & PROCESS TECHNOLOGY

www.labfacility.co.uk

LABFACILITY LIMITED



Certificate No. 4746

SOUTHERN UK & EXPORT DIVISION: Units 5,6 & 7, Block K, Southern Cross Industrial Estate, Shripney Road, Bognor Regis, West Sussex PO22 9SE **Export Sales:** tel: +44(0)1243 871287 fax: +44(0)1243 871281 email: exportsales@labfacility.co.uk

Southern UK Sales: tel: +44(0)1243 871280 fax: +44(0)1243 871281 email: southernsales@labfacility.co.uk

NORTHERN UK DIVISION: Eden Place, Unit 3b Outgang Lane, Dinnington, Sheffield S25 3QT

Northern UK Sales: tel: +44(0)1909 569446 fax: +44(0)1909 550632 email: northernsales@labfacility.co.uk

Input Type	Range	Manufacturer's Part Number	Rapid Order Code
Pt100	0°C to 100°C	XE-6200-001	61-3272
Pt100	0°C to 200°C	XE-6201-001	61-3273
J	0°C to 300°C	XE-6202-001	61-3274
K	0°C to 200°C	XE-6203-001	61-3275
K	0°C to 1100°C	XE-6204-001	61-3276