


PL-CP-Z3 -4000 740

PrevaLED Compact Z3 | LED modules for street lighting

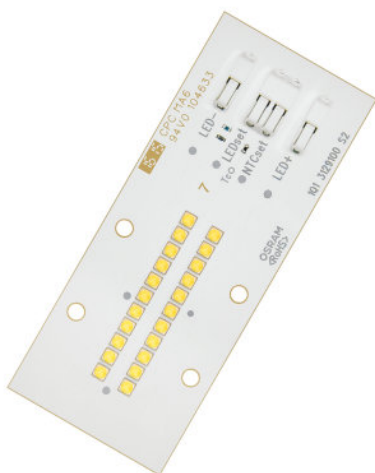

Product family features

- Asymmetric lambertian light distribution
- High module efficacy: up to 150 lm/W
- Overtemperature protection (when operated with OT LED power supply with LEDset)
- Dimmable to 20 % of nominal output power
- Very long lifetime (L80 B10): up to 100,000 h (temperature at $T_c = 80 \text{ }^\circ\text{C}$)

Product family benefits

- Extremely compact high-performance module
- Suitable for various areas of application thanks to high luminous efficacy
- Easy electrical connection thanks to standard connectors
- Future-proof dimensions for reliable designs
- 5 year guarantee

Areas of application

- Suitable for outdoor applications in luminaires with IP > 54
- Outdoor: street lighting and wall washing
- Area lighting
- Areas with high ceilings



Product datasheet

Technical data

Electrical data

Nominal voltage	70.0 V
Nominal current	0.44 A
Type of current	DC

Photometrical data


Luminous efficacy	143 lm/W ¹⁾
Color rendering index Ra	70

¹⁾ At module level

Light technical data

Starting time	0.1 s
Warm-up time (60 %)	1.00 s

Dimensions & weight

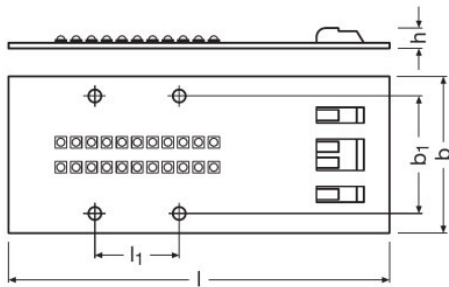

Product weight	17.90 g
----------------	---------

Temperatures & operating conditions

Temperature range in operation at Tc point	-40...80 °C
Ambient temperature range	-40...+80 °C
Maximum temperature at tc test point	90 °C
Temperature range at storage	-40...80 °C

Lifespan

Number of switching cycles	35000
----------------------------	-------

Certificates & standards

Product datasheet


Type of protection	IP54
--------------------	------

Logistical data

Commodity code	853951000000
----------------	--------------

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	02-09-2022
Primary Article Identifier	4052899299450
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained



484525_5 Year Osram Guarante
(GB)

Equipment / Accessories

– System matches to OPTOTRONIC outdoor control gears

Product datasheet

Additional product information

- Installation of LED modules (with power supplies) needs to be made under consideration of all valid regulations and norms.
- Installation by qualified electrician only.
- Please see the relevant application guides and instructions sheets for more detailed safety and mounting information. Additional information is available on request.
- The module / light engine has to be mounted to a proper heat sink in order to ensure that the maximum rated temperature at the T_c point will not be exceeded.
- Complies with IEC/EN 62031
- Complies with IEC/EN 61547
- Complies with IEC/EN 61000-3-2
- Complies with EN 55015, CISPR 15
- Do not look directly or with optical aids into the light source (complies with IEC/EN 62471, risk group RG II).
- In order to operate OSRAM LED modules safely, it is absolutely necessary to operate them with an electronically stabilized power supply that protects against short circuits, overload and overheating.
- Conducting paths on the circuit board must not be damaged or destroyed during installation.
- The clearance and creepage distances are designed for working voltages of up to 350 V DC (according to EN 62031/EN 60598).
- The LED module itself and all its components must not be stressed mechanically.
- The module, as manufactured, has no inherent protection against corrosion. It is the user's responsibility to provide suitable protection against corrosive agents, such as moisture, condensation and other harmful elements.

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899299450	PL-CP-Z3 -4000 740	Shipping carton box 30	345 mm x 130 mm x 80 mm	3.59 dm ³	680.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on the multi-level guarantee and the terms and conditions of the guarantee visit

- ▶ www.osram.com/system-guarantee

Product datasheet

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.