

CONTACTOR, AC-3, 7.5KW/400V, 1NC, AC 400V  
50HZ, 400...440V 60HZ 3-POLE, SZ S00 RING CABLE  
LUG CONNECTION

|                     |                |
|---------------------|----------------|
| product brand name  | SIRIUS         |
| Product designation | 3RT2 contactor |

General technical data:

|   |    |                                       |
|---|----|---------------------------------------|
| <b>Insulation voltage</b>   |    |                                       |
| <ul style="list-style-type: none"> <li>Rated value</li> </ul>   | V  | 690                                   |
| <b>Degree of pollution</b>  |    | 3                                     |
| <b>Surge voltage resistance Rated value</b>   | kV | 6                                     |
| <b>Mechanical service life (switching cycles)</b>   |    |                                       |
| <ul style="list-style-type: none"> <li>of the contactor typical</li> <li>of the contactor with added electronics-compatible auxiliary switch block typical</li> <li>of the contactor with added auxiliary switch block typical</li> </ul> |    | 30 000 000<br>5 000 000<br>10 000 000 |
| <b>Thermal short-time current restricted to 10 s</b>  | A  | 128                                   |
| <b>Protection class IP</b>  |    |                                       |
| <ul style="list-style-type: none"> <li>on the front</li> <li>of the terminal</li> </ul>   |    | IP20<br>IP20                          |
| <b>Equipment marking</b>  |    |                                       |
| <ul style="list-style-type: none"> <li>acc. to DIN EN 61346-2</li> <li>acc. to DIN EN 81346-2</li> </ul>  |    | Q<br>Q                                |

Main circuit:

|   |  |   |
|---|--|---|
| <b>Number of poles for main current circuit</b> |  | 3 |
| <b>Number of NC contacts for main contacts</b>  |  | 0 |
| <b>Number of NO contacts for main contacts</b>  |  | 3 |
| <b>Operating voltage</b>                        |  |   |

|   |   |      |
|---|---|------|
| • at AC-3 Rated value maximum                             | V | 690  |
| <b>Operating current</b>                                  |   |      |
| • at AC-1   |   |      |
| — at 400 V at ambient temperature 40 °C<br>Rated value    | A | 22   |
| — up to 690 V at ambient temperature 40 °C<br>Rated value | A | 22   |
| — up to 690 V at ambient temperature 60 °C<br>Rated value | A | 20   |
| • at AC-2 at 400 V Rated value                            | A | 16   |
| • at AC-3   |   |      |
| — at 400 V Rated value                                    | A | 16   |
| — at 500 V Rated value                                    | A | 12.4 |
| — at 690 V Rated value                                    | A | 8.9  |
| • at AC-4 at 400 V Rated value                            | A | 11.5 |
| <b>Operating current with 1 current path</b>              |   |      |
| • at DC-1   |   |      |
| — at 24 V Rated value                                     | A | 20   |
| — at 110 V Rated value                                    | A | 2.1  |
| — at 220 V Rated value                                    | A | 0.8  |
| — at 440 V Rated value                                    | A | 0.6  |
| — at 600 V Rated value                                    | A | 0.6  |
| • at DC-3 at DC-5   |   |      |
| — at 24 V Rated value                                     | A | 20   |
| — at 110 V Rated value                                    | A | 0.1  |
| <b>Operating current with 2 current paths in series</b>   |   |      |
| • at DC-1   |   |      |
| — at 24 V Rated value                                     | A | 20   |
| — at 110 V Rated value                                    | A | 12   |
| — at 220 V Rated value                                    | A | 1.6  |
| — at 440 V Rated value                                    | A | 0.8  |
| — at 600 V Rated value                                    | A | 0.7  |
| • at DC-3 at DC-5   |   |      |
| — at 110 V Rated value                                    | A | 0.35 |
| — at 24 V Rated value                                     | A | 20   |
| <b>Operating current with 3 current paths in series</b>   |   |      |
| • at DC-1   |   |      |
| — at 24 V Rated value                                     | A | 20   |
| — at 110 V Rated value                                    | A | 20   |
| — at 220 V Rated value                                    | A | 20   |
| — at 440 V Rated value                                    | A | 1.3  |
| — at 600 V Rated value                                    | A | 1    |

|   |     |     |
|---|-----|-----|
| <ul style="list-style-type: none"> <li>• at DC-3 at DC-5               <ul style="list-style-type: none"> <li>— at 110 V Rated value</li> <li>— at 220 V Rated value</li> <li>— at 24 V Rated value</li> <li>— at 440 V Rated value</li> <li>— at 600 V Rated value</li> </ul> </li> </ul>  | A   | 20  |
|   | A   | 1.5 |
|   | A   | 20  |
|   | A   | 0.2 |
|   | A   | 0.2 |
| <b>Operating power</b>  |     |     |
| <ul style="list-style-type: none"> <li>• at AC-1 at 400 V Rated value</li> <li>• at AC-2 at 400 V Rated value</li> <li>• at AC-4 at 400 V Rated value</li> </ul>  | kW  | 13  |
|   | kW  | 7.5 |
|   | kW  | 5.5 |
| <b>Operating power</b>  |     |     |
| <ul style="list-style-type: none"> <li>• at AC-1               <ul style="list-style-type: none"> <li>— at 230 V at 60 °C Rated value</li> <li>— at 230 V Rated value</li> <li>— at 400 V at 60 °C Rated value</li> <li>— at 690 V at 60 °C Rated value</li> <li>— at 690 V Rated value</li> </ul> </li> <li>• at AC-3               <ul style="list-style-type: none"> <li>— at 230 V Rated value</li> <li>— at 400 V Rated value</li> <li>— at 690 V Rated value</li> </ul> </li> </ul> | kW  | 7.5 |
|   | kW  | 7.5 |
|   | kW  | 13  |
|   | kW  | 22  |
|   | kW  | 22  |
|   | kW  | 4   |
|   | kW  | 7.5 |
|   | kW  | 7.5 |
| <b>Operating power for <math>\geq 200000</math> operating cycles at AC-4</b>  |     |     |
| <ul style="list-style-type: none"> <li>• at 400 V Rated value</li> <li>• at 690 V Rated value</li> </ul>  | kW  | 2.5 |
|   | kW  | 3.5 |
| <b>Operating frequency</b>  |     |     |
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> </ul>   | 1/h | 750 |

#### Control circuit/ Control:

|  |   |              |
|--|---|--------------|
| <b>Type of voltage of the control supply voltage</b>   |   | AC           |
| <b>Control supply voltage with AC</b>  |   |              |
| <ul style="list-style-type: none"> <li>• at 50 Hz Rated value</li> <li>• at 60 Hz Rated value</li> </ul> | V | 400          |
|  | V | 440          |
| <b>Operating range factor control supply voltage rated value of the magnet coil with AC</b>              |   |              |
| <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>                         |   | 0.8 ... 1.1  |
|  |   | 0.85 ... 1.1 |

#### Auxiliary circuit:

|   |  |   |
|---|--|---|
| <b>Number of NC contacts</b>  |  |   |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts               <ul style="list-style-type: none"> <li>— instantaneous contact</li> </ul> </li> </ul> |  | 1 |
| <b>Number of NO contacts</b>  |  |   |

|  |   |   |
|--|---|---|
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— instantaneous contact</li> </ul> </li> </ul>  |   | 0   |
| <b>Product expansion Auxiliary switch</b>  |   | Yes   |
| <b>Operating current at AC-15</b>  |   |   |
| <ul style="list-style-type: none"> <li>• at 230 V Rated value</li> </ul>   | A | 10  |
| <ul style="list-style-type: none"> <li>• at 400 V Rated value</li> </ul>   | A | 3   |
| <ul style="list-style-type: none"> <li>• at 690 V Rated value</li> </ul>   | A | 1   |
| <b>Operating current</b>   |   |   |
| <ul style="list-style-type: none"> <li>• at DC-12 at 125 V Rated value</li> </ul>  | A | 2   |
| <ul style="list-style-type: none"> <li>• at DC-12 at 220 V Rated value</li> </ul>  | A | 1   |
| <ul style="list-style-type: none"> <li>• at DC-12 at 600 V Rated value</li> </ul>  | A | 0.15  |
| <ul style="list-style-type: none"> <li>• at DC-13 at 125 V Rated value</li> </ul>  | A | 0.9   |
| <ul style="list-style-type: none"> <li>• at DC-13 at 220 V Rated value</li> </ul>  | A | 0.3   |
| <ul style="list-style-type: none"> <li>• at DC-13 at 600 V Rated value</li> </ul>  | A | 0.1   |
| <b>Operating current</b>   |   |   |
| <ul style="list-style-type: none"> <li>• at DC-12 <ul style="list-style-type: none"> <li>— at 60 V Rated value</li> <li>— at 110 V Rated value</li> </ul> </li> </ul>                                | A | 6   |
|  | A | 3   |
| <ul style="list-style-type: none"> <li>• at DC-13 <ul style="list-style-type: none"> <li>— at 24 V Rated value</li> <li>— at 60 V Rated value</li> <li>— at 110 V Rated value</li> </ul> </li> </ul> | A | 10  |
|  | A | 2   |
|  | A | 1   |
| <b>Contact reliability of the auxiliary contacts</b>   |   | 1 faulty switching per 100 million (17 V, 1 mA) |

#### UL/CSA ratings:

|  |              |             |
|--|--------------|-------------|
| <b>Full-load current (FLA) for three-phase AC motor</b>  |              |             |
| <ul style="list-style-type: none"> <li>• at 480 V Rated value</li> </ul>                               | A            | 14          |
| <ul style="list-style-type: none"> <li>• at 600 V Rated value</li> </ul>                               | A            | 11          |
| <b>yielded mechanical performance [hp]</b>   |              |             |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor at 110/120 V Rated value</li> </ul> | metric<br>hp | 1           |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor at 230 V Rated value</li> </ul>     | metric<br>hp | 2           |
| <ul style="list-style-type: none"> <li>• for three-phase AC motor at 200/208 V Rated value</li> </ul>  | metric<br>hp | 3           |
| <ul style="list-style-type: none"> <li>• for three-phase AC motor at 220/230 V Rated value</li> </ul>  | metric<br>hp | 5           |
| <ul style="list-style-type: none"> <li>• for three-phase AC motor at 460/480 V Rated value</li> </ul>  | metric<br>hp | 10          |
| <ul style="list-style-type: none"> <li>• for three-phase AC motor at 575/600 V Rated value</li> </ul>  | metric<br>hp | 10          |
| <b>Contact rating of the auxiliary contacts acc. to UL</b>   |              | A600 / Q600 |

#### Short-circuit:

|   |  |  |
|---|--|--|
| <b>Design of the fuse link</b>  |  |  |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of assignment 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> |  | gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE:<br>35 A<br><br>gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE:<br>20 A<br><br>fuse gL/gG: 10 A |

**Installation/ mounting/ dimensions:**

|  |    |  |
|--|----|--|
| <b>mounting position</b>   |    | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| <b>Mounting type</b>   |    | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022   |
| <ul style="list-style-type: none"> <li>• Side-by-side mounting</li> </ul>  |    | Yes  |
| <b>Height</b>  | mm | 57.5   |
| <b>Width</b>   | mm | 45   |
| <b>Depth</b>   | mm | 73   |
| <b>Required spacing</b>  |    |  |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | mm | 0<br>0<br>0<br>0<br>0<br><br>0<br>0<br>0<br>6<br>0<br><br>0<br>0<br>0<br>0<br>6  |

**Connections/ Terminals:**

|   |  |  |
|---|--|--|
| <b>Type of electrical connection</b>  |  |  |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul> |  | ring cable connection<br>ring cable connection |
| <b>Apparent pick-up power of the magnet coil with AC</b>  |  |  |

- at 50 Hz
- at 60 Hz

|     |    |
|-----|----|
| V·A | 37 |
| V·A | 33 |

**Safety related data:**

|   |     |             |
|---|-----|-------------|
| <b>B10 value with high demand rate acc. to SN 31920</b>                   |     | 1 000 000   |
| <b>Proportion of dangerous failures</b>                                   |     |             |
| • with low demand rate acc. to SN 31920                                   | %   | 40          |
| • with high demand rate acc. to SN 31920                                  | %   | 73          |
| <b>Failure rate [FIT] with low demand rate acc. to SN 31920</b>           | FIT | 100         |
| <b>Product function Mirror contact acc. to IEC 60947-4-1</b>              |     | Yes         |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | y   | 20          |
| <b>Protection against electrical shock</b>                                |     | finger-safe |

**Mechanical data:**

|                          |  |     |
|--------------------------|--|-----|
| <b>Size of contactor</b> |  | S00 |
|--------------------------|--|-----|

**Ambient conditions:**

|  |    |             |
|--|----|-------------|
| <b>Installation altitude at height above sea level maximum</b> | m  | 2 000       |
| <b>Ambient temperature</b>                                     |    |             |
| • during operation   | °C | -25 ... +60 |
| • during storage   | °C | -55 ... +80 |

**Certificates/ approvals:**

|                          |                                       |                           |
|--------------------------|---------------------------------------|---------------------------|
| General Product Approval | Functional Safety/Safety of Machinery | Declaration of Conformity |
|--------------------------|---------------------------------------|---------------------------|



[Type Examination](#)



|                   |                   |
|-------------------|-------------------|
| Test Certificates | Shipping Approval |
|-------------------|-------------------|

[Special Test Certificate](#)



|                   |       |
|-------------------|-------|
| Shipping Approval | other |
|-------------------|-------|



[Environmental Confirmations](#)

[Confirmation](#)



#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT20184AR62>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RT20184AR62/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT20184AR62&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT20184AR62&lang=en)

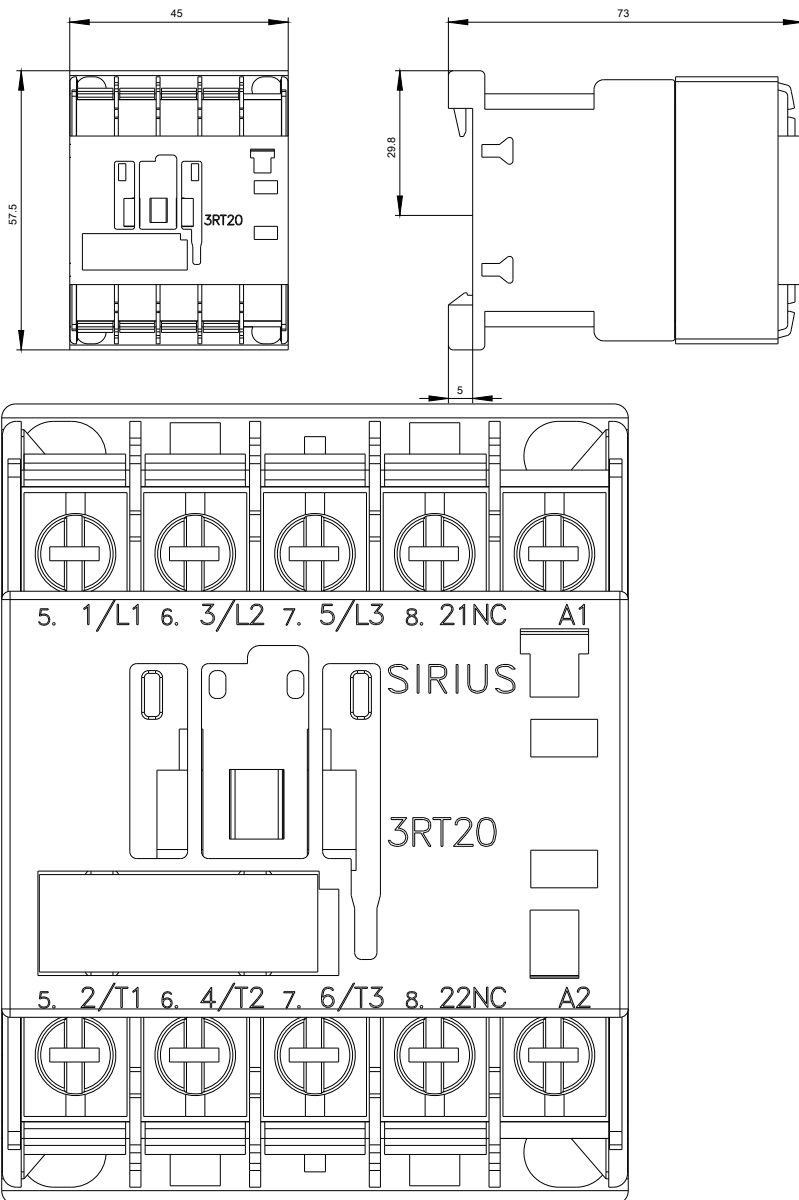





last modified:

11.03.2015