


# WE-CMBNC

## Common Mode Power Line Choke

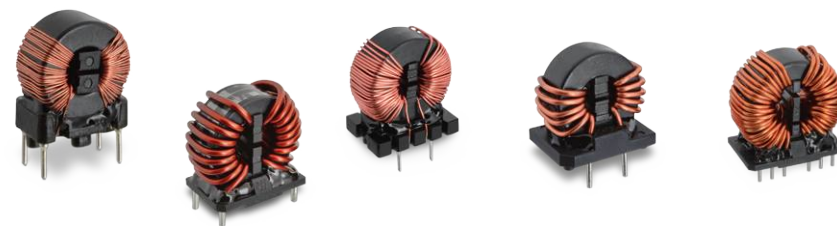

|     |                      |                   |        |
|-----|----------------------|-------------------|--------|
| XS  | <b>744 801 450 1</b> | L:                | 0.4 mH |
|     |                      | I <sub>R</sub> :  | 4.5 A  |
|     |                      | R <sub>DC</sub> : | 22 mΩ  |
|     | <b>744 801 130 5</b> | L:                | 5 mH   |
|     |                      | I <sub>R</sub> :  | 1.3 A  |
|     |                      | R <sub>DC</sub> : | 200 mΩ |
|     | <b>744 801 091 1</b> | L:                | 11 mH  |
|     |                      | I <sub>R</sub> :  | 0.9 A  |
|     |                      | R <sub>DC</sub> : | 430 mΩ |
| M   | <b>744 803 150 1</b> | L:                | 1 mH   |
|     |                      | I <sub>R</sub> :  | 15 A   |
|     |                      | R <sub>DC</sub> : | 3.3 mΩ |
|     | <b>744 803 050 9</b> | L:                | 9 mH   |
|     |                      | I <sub>R</sub> :  | 5 A    |
|     |                      | R <sub>DC</sub> : | 28 mΩ  |
|     | <b>744 803 033 3</b> | L:                | 33 mH  |
|     |                      | I <sub>R</sub> :  | 2.5 A  |
|     |                      | R <sub>DC</sub> : | 90 mΩ  |
| L   | <b>744 804 200 1</b> | L:                | 1 mH   |
|     |                      | I <sub>R</sub> :  | 20 A   |
|     |                      | R <sub>DC</sub> : | 2.4 mΩ |
|     | <b>744 804 070 7</b> | L:                | 7 mH   |
|     |                      | I <sub>R</sub> :  | 7 A    |
|     |                      | R <sub>DC</sub> : | 20 mΩ  |
|     | <b>744 804 038 2</b> | L:                | 82 mH  |
|     |                      | I <sub>R</sub> :  | 2.5 A  |
|     |                      | R <sub>DC</sub> : | 170 mΩ |
| XL  | <b>744 805 320 1</b> | L:                | 0.9 mH |
|     |                      | I <sub>R</sub> :  | 32 A   |
|     |                      | R <sub>DC</sub> : | 1.1 mΩ |
|     | <b>744 805 101 2</b> | L:                | 12 mH  |
|     |                      | I <sub>R</sub> :  | 10 A   |
|     |                      | R <sub>DC</sub> : | 15 mΩ  |
|     | <b>744 805 021 9</b> | L:                | 190 mH |
|     |                      | I <sub>R</sub> :  | 2 A    |
|     |                      | R <sub>DC</sub> : | 310 mΩ |
| XXL | <b>744 806 380 1</b> | L:                | 1.5 mH |
|     |                      | I <sub>R</sub> :  | 38 A   |
|     |                      | R <sub>DC</sub> : | 2.3 mΩ |
|     | <b>744 806 130 9</b> | L:                | 9 mH   |
|     |                      | I <sub>R</sub> :  | 13 A   |
|     |                      | R <sub>DC</sub> : | 15 mΩ  |
|     | <b>744 806 053 5</b> | L:                | 35 mH  |
|     |                      | I <sub>R</sub> :  | 5 A    |
|     |                      | R <sub>DC</sub> : | 90 mΩ  |

EMC COMPONENTS | INDUCTORS | TRANSFORMERS | RF COMPONENTS | CIRCUIT PROTECTION | EMC SHIELDING MATERIAL | CONNECTORS | SWITCHES | ASSEMBLY TECHNIQUE | POWER ELEMENTS

**Important information:** Würth Elektronik's design kits contain reference components. These components correspond with the current product development status on the day of supply. Exchange of the reference components to components with up-to-date product development status is not carried out automatically. No liability is taken for the use of these reference components. Therefore, please request new samples prior to releases for series production and product release.

Please check datasheets on [www.we-online.com](http://www.we-online.com) for specifications. Würth Elektronik eiSos GmbH & Co. KG, EMC & Inductive Solutions. © 2014

[www.we-online.com](http://www.we-online.com)

**All products  
in stock!**