



SEALABLE COVER FOR DIRECTLY ATTACHABLE  
CURRENT MONITORING RELAYS 3RR2 TO  
PROTECT AGAINST UNAUTHORIZED CONFIGURING






General technical data:

<b>product brand name</b>		SIRIUS
<b>Product designation</b>		sealable end cover
<b>Design of the product</b>		to prevent unauthorized operation
<b>Ambient temperature</b>		
• during storage	°C	-40 ... +80
• during operation	°C	60 ... 60

Installation/ mounting/ dimensions:


<b>Width</b>	mm	33.3
<b>Height</b>	mm	4.5
<b>Depth</b>	mm	45

Certificates/ approvals:

General Product Approval		EMC	Declaration of Conformity	Test Certificates
 CCC	 CSA		 C-TICK	 EG-Konf.

[Special Test Certificate](#)

Test Certificates	Shipping Approval				
<a href="#">Type Test Certificates/Test Report</a>	 ABS	 DNV	 GL	 LRS	 RINA

Shipping Approval
 RMRS

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RR2940>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<http://support.automation.siemens.com/WW/view/en/3RR2940/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

<http://www.automation.siemens.com/bilddb/index.aspx?attID9=3RR2940&lang=en>

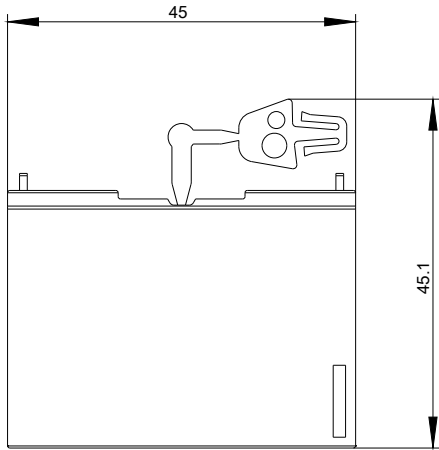

last modified:

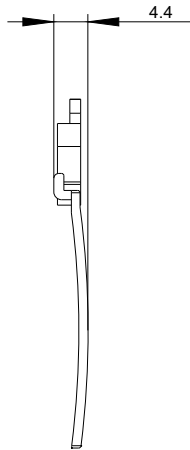

15.01.2015