

## Multi-range thread milling cutter with neck recess solid carbide 15° straight shank HA

For universal use up to 1500 N/mm<sup>2</sup> in female threads.

**ATORN®**

### Application


For manufacturing right-handed and left-handed metric threads in through and blind holes on CNC and conventional machines in the steel, stainless steel, NF metal, cast and special alloy material groups up to a strength of 1500 N/mm<sup>2</sup> in single part and series production.

### Version

- With collar recess.

### Advantage

- Innovative cutting geometry for very high dimensional accuracy, process reliability and chip removal.
- Deep thread depth achievable due to collar recess between thread part and shank.

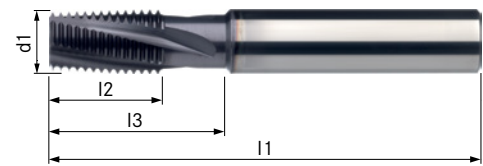

Application	Steel (N/mm <sup>2</sup> )			Stainless steel		Alu		Brass		Bronze		Plastics	Graphite G(C)FK	GG(G) GJMW	Titan-alloy	Nickel-alloy	Super-alloy	Hard mat.	
	<700	<1000	<1300	marten.	austen.	short	long	short	long	short	long							<55 HRC	<65 HRC
	110		80	90	70	210	230	190	190	170	170	210	140	80	40	30	30		

<b>Art. No.</b>	<b>13498 105</b>
<b>Tool holding device</b>	HA parallel shank
<b>Cutting material</b>	VHM
<b>Surface</b>	Uncoated
<b>Hole type</b>	Clearance/blind hole ≤ 2xD
<b>Coolant supply</b>	Internal
<b>Cutting edge diameter</b>	10 mm
<b>Pitch</b>	1.5 mm
<b>Suitable from thread size</b>	M14
<b>Length</b>	70 mm
<b>Cutting edge length</b>	16 mm
<b>Effective length of thread milling</b>	25 mm
<b>Shaft diameter</b>	10 mm
<b>Number of cutting edges</b>	4 PCS
<b>f steel 1000</b>	0.05 mm/r

### EAN-Code

405029327 1799