



CEE 7/XVI



BS 1363 A



NEMA 1-15P

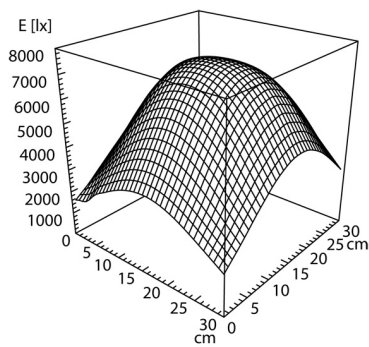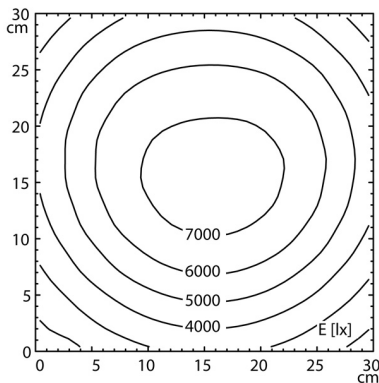

**light source**  
**work equipment**  
**connected load**  
**power consumption**  
**luminous flux**  
**luminous efficiency**  
**light distribution**  
**direct ratio**  
**colour temperature**  
**colour temperatur**  
**color rendering index (CRI)**  
**chromaticity tolerance LED**  
**system of protection**  
**class of protection**  
  
**technology**  
**operation**  
**housing**  
**cover**  
**arm**  
  
**weight (net)**  
**mains lead**  
  
**fastening**  
**lens, dimensions**  
**lens material**  
**lens, diopters**

LED  
electronic plug-in ballast  
100-240 V, 50/60 Hz  
env. 12 W  
approx. 800 lm  
approx. 67 lm/W  
direct  
approx. 100 %  
neutral white  
approx. 5.000 K  
≥ 80  
< 3 SDCM  
IP 20  
II with plug-in power supply, III without plug-in power supply  
continuously dimmable  
push button  
plastic; untreated; aluminium coloured anodised  
25  
tubular aluminium section; anodized; aluminium coloured anodised  
env. 2,0 kg  
approx. ca. 3 m m; mains plug; CEE 7/XVI; BS 1363 A; NEMA 1-15P  
table clamp  
Ø 160 mm  
PMMA  
3,5