



STANDARD EXECUTIONS


- **GN 509.3-A:** stainless steel, for clamping and removal from the side of assembly.
- **GN 509.3-B:** zinc-plated steel, for safety clamping from the side opposite to assembly.

FEATURES AND APPLICATIONS


GN 509.3 spring rings allow an easy and quick assembly and removal of ball transfer units GN 509 (see page 973), GN 509.1 (see page 974), UTB (see page -), and UTR (see page -).



GN 509.3-A

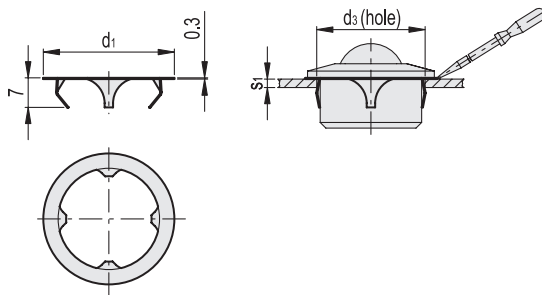

GN 509.3-B

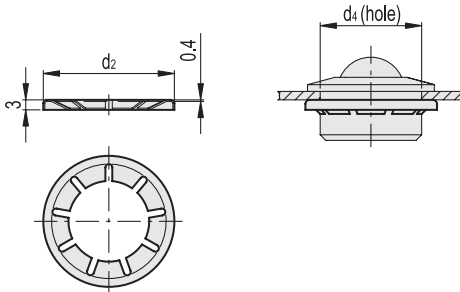

GN 509.3-A

Code	Description	d1	d3	S1	GN 509/GN 509.1/UTB/UTR	⚖️
GN.23061	GN 509.3-31-A	31	25 -0.2	2+3	15	1
GN.23071	GN 509.3-44-A	44	37.3 -0.3	3+4	22	1
GN.23081	GN 509.3-55-A	55	46.7 -0.3	4+4	30	1

GN 509.3-B

Code	Description	d2	d4	GN 509/GN 509.1	⚖️
GN.23073	GN 509.3-36-B	36	22.2	12	3
GN.23076	GN 509.3-38-B	38	24.2	15	3



Machine elements