pull stud for steep taper DIN 69872 shape A


Application

for tools with steep taper in accordance with ISO 7388-1 (old standard was DIN 69871) and ISO 7388-2 (old standard was JIS B 6339 MAS-BT)

Version

- All pull studs made from material 16Mn Cr5
- Case-hardened HRC 58 ± 2
- Soft, bronzed and ground thread and bore hole
- Pull studs with o-ring = sealed

Art. No.	23692 140
Suitable for tool holding device	SK 40
Form	В
Outer diameter	19 mm
Bolt diameter	14 mm
Diameter	17 mm
Suitable for screw thread	M16
Length	54 mm
Coolant supply	No
Angle	15 Degree
Length of tenon	26 mm
DIN	69872

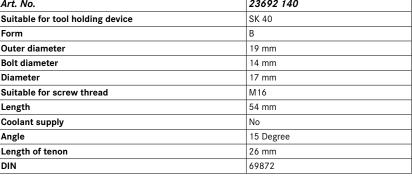

EAN-Code

4050293200638

