

TM-XB215 S24-01 FOR ET200S MOTOR STARTER FOR BRAKE MODULES XB3/XB4/XB6 TERMINAL MODULE FOR MOUNTING FOR BRAKE CONTROL MODULE TO THE RIGHT OF RS1-X, DS1-X RS1E-X, DS1E-X, F-DS1E-X,F-RS1E-X DSS1E-X WITHOUT XB4/6

General technical data:		
Product designation		Terminal module
Product type designation		TM-xB215 S24-01
Design of the product		for brake control modules xB3, xB4, xB6
Mounting height	mm	196.5
Installation width	mm	15
Installation depth	mm	95
Protection class IP		IP20
Surge voltage resistance Rated value	V	8 000
Operating current Rated value	A	4
Type of connectable conductor cross-section		
<ul style="list-style-type: none"> • solid • finely stranded with core end processing • for AWG conductors <ul style="list-style-type: none"> — solid — stranded 		1x (0.14 ... 2.5 mm ²) 1x (0.14 ... 1.5 mm ²), acc. to IEC 60947 1x (18 ... 22) 1x (18 ... 22)

Installation/ mounting/ dimensions:		
Size of the screwdriver tip		Standard screwdriver Size 1
Tightening torque with screw-type terminals	N·m	0.4 ... 0.7

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK19030AG01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK19030AG01/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

<http://www.automation.siemens.com/bilddb/index.aspx?attID9=3RK19030AG01&lang=en>

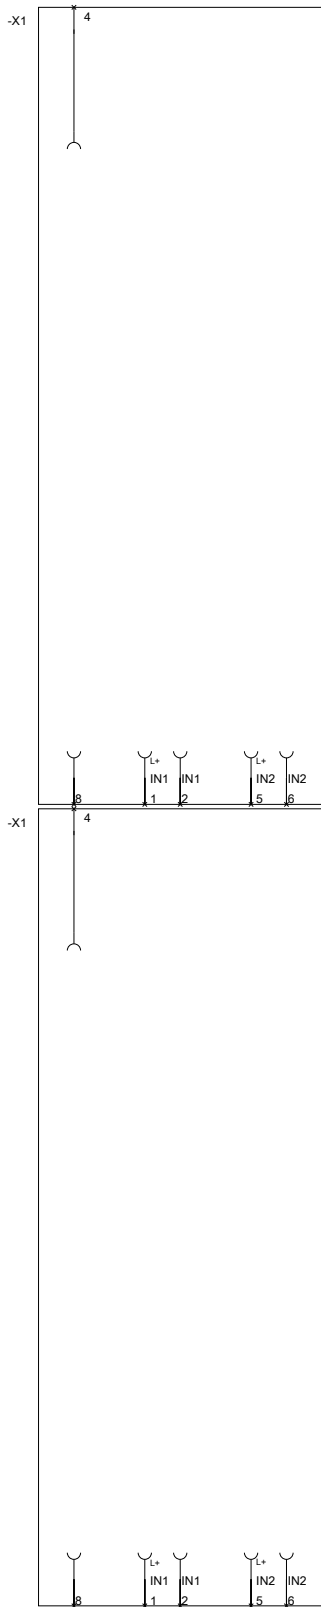

last modified:

15.01.2015