


## W-Series WPE 120/150

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

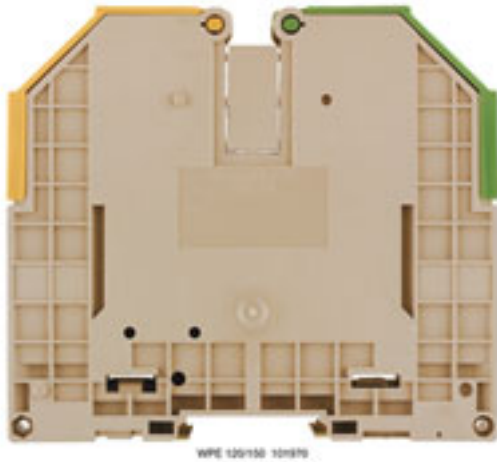

The PE terminals are available in two designs: standard and compact (N), with rated cross-section from 1.5 mm<sup>2</sup> to 150 mm<sup>2</sup> (e.g. 2.5 mm<sup>2</sup> – WPE 2.5 or 4 mm<sup>2</sup> – WPE 4N).

### General ordering data

Type	WPE 120/150
Order No.	<a href="#">1019700000</a>
Version	W-Series, PE terminal, Rated cross-section: 120 mm <sup>2</sup> , Screw connection, Direct mounting
GTIN (EAN)	4008190495671
Qty.	10 pc(s).

## W-Series WPE 120/150

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Dimensions and weights

Length	132 mm	Width	32 mm
Height	117 mm	Height of lowest version	125.5 mm
Net weight	579.85 g		

### Temperatures

Operating temperature		Storage temperature	
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C

### Rated data IECEx/ATEX

Certificate No. (ATEX)	KEMA98ATEX1686U	ATEX certificate	KEMA98ATEX1686U_d.pdf
ATEX certificate	KEMA98ATEX1686U_e.pdf	Wire cross section max. (ATEX)	120 mm <sup>2</sup>
Voltage, cross-connection		Operating temperature range	For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity
	CrossConnectionGuide.pdf		
Marking EN 60079-7	Ex e II	Marking ATEX Directive 94/9/EC	II 2 G D

### Additional technical data

Explosion-tested version	Yes	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	closed
Type of mounting	Screwed	Version	Screw connection, With PE connection, closed

### CSA ratings data

Certificate No. (CSA)	12400-382	Wire cross section max. (CSA)	250 kcmil
Wire cross section min. (CSA)	2 AWG		

### Clampable wires (rated connection)

Type of connection	Screw connection	Stripping length	35 mm
Blade size	S6 (DIN 6911)	Connection direction	on side
Number of connections	2	Clamping range, rated connection, min.	33.62 mm <sup>2</sup>
Clamping range, rated connection, max.	150 mm <sup>2</sup>	Clamping screw	M 10
Tightening torque, min.	10 Nm	Tightening torque, max.	20 Nm
Gauge to IEC 60947-1	B13	Wire connection cross section, stranded, rated connection, min.	35 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, max.	150 mm <sup>2</sup>	Wire connection cross section, finely stranded, max.	150 mm <sup>2</sup>
Wire connection cross-section, finely stranded, min.	35 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	35 mm <sup>2</sup>
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	95 mm <sup>2</sup>		

### Dimensions

TS 35 offset	32 mm
--------------	-------

## W-Series WPE 120/150

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technische Daten

### Rated data

Rated cross-section	120 mm <sup>2</sup>	Rated voltage to adjoining terminal	1,000 V
Rated impulse withstand voltage to adjacent terminal	8 kV	Standards	IEC 60947-7-2
Pollution severity	3		

### UL ratings data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	250 kcmil
Conductor size Factory wiring min. (UR)	2 AWG	Conductor size Field wiring max. (UR)	250 kcmil

### Material data

Material	Wemid	Colour	Yellow, Green
UL 94 flammability rating	V-0		

### System specifications

Product family	W-Series	Type of connection	Screw connection
Connection direction	on side	Number of levels	1
Number of connections	2	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	No		

### PE rating data

Centre screw on PE terminals	M 6	PEN function	No
Pollution severity	3	Rated cross-section	120 mm <sup>2</sup>
Rated short-time current	14400 A (120 mm <sup>2</sup> )	Standards	IEC 60947-7-2
Tightening torque range for fixing screw	3.0...6.0 Nm		

### Classifications

ETIM 3.0	EC000901	UNSPSC	30-21-18-11
eClass 5.1	27-14-03-05	eClass 6.2	27-14-03-05
eClass 7.1	27-14-03-05		

### Product information

Descriptive text technical data	For 50 - 150 mm <sup>2</sup> , the TS 35 x 15 (copper, 2.3 mm thick) mounting rail should be used.
Descriptive text accessories	Rail support protective insulation for installation of mounting rail "SH 2" order No. 0494920000 (QTY 10).

### Approvals

Approvals



ROHS Conform

**Datenblatt**

**W-Series**  
**WPE 120/150**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Zeichnungen**

