

6

5

4

3

2

1

D

D

C

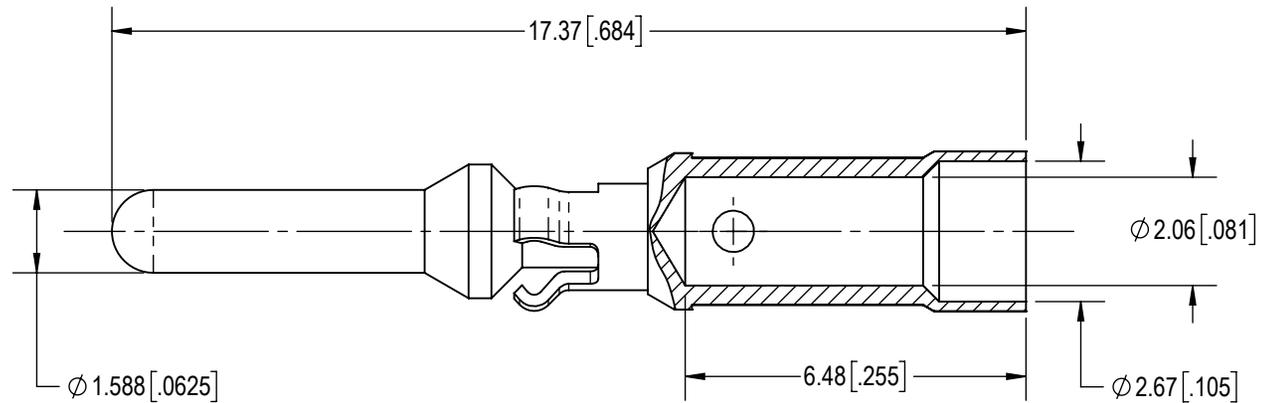

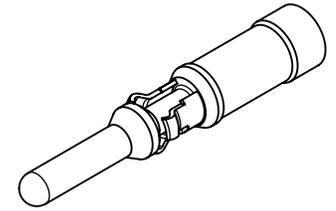
C

B

B

A

A

**NOTES:**

- MATERIAL AND FINISHES:
CONTACT: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
RETENTION RING: BERYLLIUM COPPER, NICKEL PLATE.
- CONTACTS ARE COMPLIANT TO THE CURRENT RoHS DIRECTIVE.
- MOS 133.0: THIS MOS ALLOWS FOR CRIMP REMOVABLE CONTACT TO BE SUPPLIED WITH A O.A.L. OF 17.37 [.684] WHICH ALLOWS FOR A 6.35 [.250] MATING LENGTH WHEN INSTALLING INTO MOLDING.
- DETAILED PRODUCT, MECHANICAL AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST COMBO-D PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.
- CRIMPING TOOL INFORMATION IS AVAILABLE AT WWW.CONNECTPOSITRONIC.COM/CrimpToolCrosslist.

BY	SM	CHK	ND	3RD ANGLE	POSITRONIC BELIEVES THE DATA ON THE DRAWING TO BE RELIABLE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.	 Positronic [®] CONNECTPOSITRONIC.COM
APR	PA	RELEASED DATE:	2021-02-22			
TOLERANCES				SCALE	PART NUMBER	
$\pm 0.03\text{mm}$ [.001 INCHES] FOR MALE CONTACT MATING DIAMETERS $\pm 0.08\text{mm}$ [.003 INCHES] FOR CONTACT TERMINATION DIAMETERS $\pm 0.13\text{mm}$ [.005 INCHES] FOR ALL OTHER DIAMETERS $\pm 0.38\text{mm}$ [.015 INCHES] FOR ALL OTHER DIMENSIONS $\pm 5^\circ$ FOR ALL ANGLES DIMENSION ARE IN MILLIMETERS [INCHES]				NTS	MC114N/AA-133.0	SERIES CBD/CBM
				TITLE	MC114N/AA-133.0	
				CREATED ON:	SHEET	REV
				2021-01-30	SHEET 1 OF 1	A

6

5

4

3

2

1