

Ø 3,3 x 10,0 mm



Spannung <i>Voltage</i>	250 V	Strom <i>Current</i>	3 A	Typ <i>Type</i>	Axial
----------------------------	-------	-------------------------	-----	--------------------	-------



Norm / Standard: IEC 60691
Anschluss / Connection: Rundstifte,
Oberfläche verzinnt, steckbar und lötbar /
Round pins,
Surface tin-plated, pluggable and solderable
Verpackungsmöglichkeiten / Packing options: 100 St. = lose geschüttet in Polybeutel /
100 pcs. = bulk in plastic bag


Bemessungswerte / Ratings:

Art. No.	I _N	U _N [V]	T _N ¹⁾ [°C]	T _H [°C]	T _{max} [°C]	UR	cUR	VDE	PSE	CCC	KC
750.084-X	3 A	250	84	65	200	●	●	●	●	●	●
750.102-X	3 A	250	102	80	200	●	●	●	●	●	●
750.115-X	3 A	250	115	99	200	●	●	●	●	●	●
750.125-X	3 A	250	125	105	200	●	●	●	●	●	●
750.130-X	3 A	250	130	107	200	●	●	●	●	●	●
750.135-X	3 A	250	135	115	200	●	●	●	●	●	●
750.138-X	3 A	250	138	118	200	●	●	●	●	●	●
750.145-X	3 A	250	145	126	200			●	●	●	●
750.150-X	3 A	250	150	128	200	●	●	●	●	●	●

¹⁾ Toleranz / Tolerance: +0 / - 10 °C (IEC 60691)

Legende / Caption:

- I_N = Bemessungsstrom / Rated current
- U_N = Bemessungsspannung / Rated voltage
- T_N = Bemessungstemperatur / Rated functioning temp.
- T_H = Haltetemperatur / Holding temperature
- T_{max} = max. Grenztemperatur / max. temp. limit

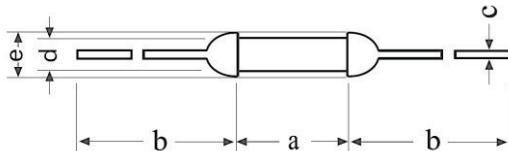

a	b	c	d	e
10.0 ± 0.5	38 ± 3	Ø 0.6 ± 0.02	Ø 3.0 ± 0.1	3.3 or below

Angaben / Dimension in [mm]