

SINAMICS/MICROMASTER PX LINE REACTOR INPUT: 3AC 380-480 V, 50/60 HZ 508 A

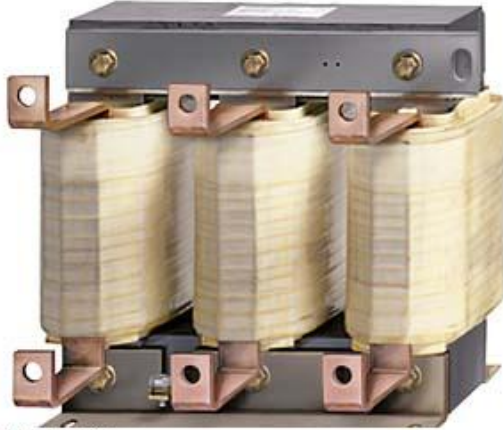


Figure similar

Order number	6SL3000-0CE35-1AA0
Phase number / of the input voltage	3
Type of voltage / of the input voltage	AC
Input voltage	380 ... 480
Output current / Rated value	508 A
Active power loss	
• at 50 Hz	Wert fehlt!
• at 60 Hz	Wert fehlt!
Type of electrical connection	
• for mains supply line	1 x hole for M12
• for load-side outgoing feeder	1 x hole for M12
Type of connectable conductor cross-section / for load-side outgoing feeder	Wert fehlt!
Type of electrical connection / for PE conductor	M6 screw
Protection class IP	IP00
Width	300 mm
Height	269 mm
Depth	212.5 mm
Net weight	38 kg
Certificate of suitability	CE / cRUus

Further information

Information und Download Center

https://www.automation.siemens.com/mcms/infocenter/content/en/Pages/order_form.aspx

Technical documentation

<http://w3.siemens.com/mcms/mc-solutions/en/motion-control/support/technical-documentation/Pages/technical-documentation.aspx>

Industry Mall

<https://eb.automation.siemens.com/mall/en/WW/Catag/Product/6SL3000CE351AA0/all>

