



Catalog Numbers, Ratings – aM (Optional Blown-Fuse Indicator)

SIZE (mm x mm)	RATED In CURRENT (A)	RATED VOLTAGE	CATALOG NUMBER		INTERRUPTING RATING (A)	STANDARD PACK/CTN.
			w/o Indicator	w/Indicator		
15519-G  8 x 31	1	400V	15511-G	-	20,000	10/100
	2		15513-G	-		
	4		15519-G	-		
	6		15523-G	-		
	8		15527-G	-		
	10		15531-G	-		
16535-G  10 X 38	0.16	500V	16503-G	-	120,000	10/100
	0.25		16507-G	-		
	0.5		16509-G	-		
	1		16511-G	16711-G		
	2		16513-G	16713-G		
	4		16519-G	16719-G		
	6		16523-G	16723-G		
	8		16527-G	16727-G		
	10		16531-G	16731-G		
	12		16533-G	16733-G		
	16	16535-G	16735-G			
	20	16537-G	16737-G			
	25	400V	16539-G	16739-G		
	32		16543-G			
17535-G  14 X 51	0.25	690V	17507-G	-	80,000	10/50
	0.5		17509-G	-		
	1		17511-G	17711-G		
	2		17513-G	17713-G		
	4		17519-G	17719-G		
	6		17523-G	17723-G		
	8		17527-G	17727-G		
	10		17531-G	17731-G		
	12		17533-G	17733-G		
	16		17535-G	17735-G		
	20	17537-G	17737-G			
	25	17539-G	17739-G			
	32	500V	17543-G	17743-G		
	40		17547-G	17747-G		
	45		17549-G	17749-G		
	50		400V	17551-G		
18555-G  22 x 58	4		690V	18519-G	18719-G	80,000
	6	18523-G		18723-G		
	8	18527-G		18727-G		
	10	18531-G		18731-G		
	12	18533-G		18733-G		
	16	18535-G		18735-G		
	20	18537-G		18737-G		
	25	18539-G		18739-G		
	32	18543-G		18743-G		
	40	18547-G		18747-G		
	50	18551-G		18751-G		
	63	18555-G		18755-G		
	80	18559-G		18759-G		
	100	500V		18563-G	18763-G	
125	400V		18565-G	18765-G		

Blown-Fuse Indicator

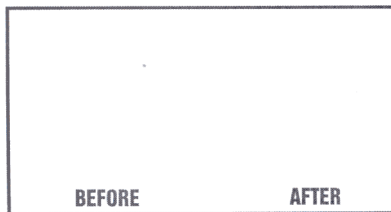

Dimensions

FUSE SIZE	A	B	C
8 x 31	8.5	31.5	6.3
10 x 38	10.3	38	10.5
14 x 51	14.3	51	13.8
22 x 58	22.2	58	16.2