

Enabling Switch

S2DF002

Part Number



- Feedback (vibration signal and LED) upon approval
- One-hand operation thanks to ergonomic design
- Rubberized enabling switch

The 3-stage enabling switch is very well suited to extensive commissioning or service work thanks to the special design. The ergonomic design prevents fatigue and makes work easier.

Technical Data

Electrical Data

Temperature Range -5...60 °C

Mechanical Data

Housing Material Plastic

Service Life 1000000 Switching Cycles

Degree of Protection IP54

Connection Cable, 10-wire, 5 m

Safety-relevant Data

B10d Switching Cycles 100 000

NO Contacts 2

Function

3-stage yes

Additional keys + / - key

Vibration signal yes

Switching Status Indicator yes

Connection Diagram No.

862

Control Panel No.

FP1


Suitable Mounting Technology No.

840


Complementary Products

Safety Relay SR4B3B01S, SR4D3B01S

Software

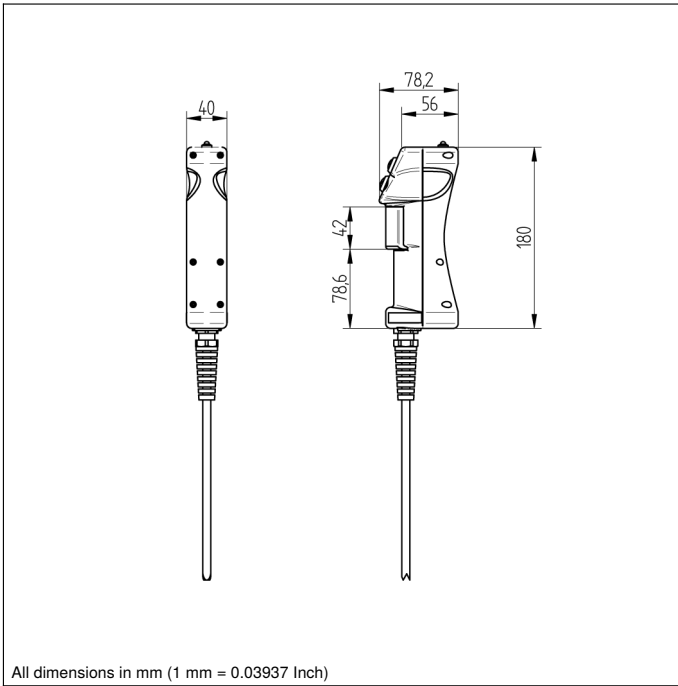

Ctrl. Panel



- 01 = Switching Status Indicator
- 24 = Plus Button
- 25 = Minus Button
- 93 = Confirmation key