

Cree® XLamp® XR Family LEDs



TABLE OF CONTENTS

Introduction	1
Bin and Order Code Formats	2
Performance Groups - Brightness	3
Performance Groups - Chromaticity4	4
Performance Groups - Dominant Wavelength	ó
Performance Groups – Forward Voltage	ó
Cree's Standard Chromaticity Regions Plotted on the 1931 CIE	
Curve	7
Standard Order Codes and Bins	
XR-C Cool White	3
XR-C Neutral White	9
XR-C Warm White10	J
XR-C Color1	1
XR-E Cool White13	3
XR-E Neutral White14	4
XR-E Warm White1	5
XR-E Color10	ó

INTRODUCTION

This document describes the product nomenclature required to select and order Cree's XLamp® XR-E and XR-C LEDs. XLamp XR-E and XR-C LEDs are tested and sorted into bins which are then combined into orderable kits identified by an order code.


All XLamp LEDs are tested and sorted by color and brightness into a unique bin. Each bin contains LEDs from only one color and brightness group and is uniquely identified by a bin code. White XLamp LEDs are sorted by chromaticity (color) and luminous flux (brightness). Color XLamp LEDs are sorted by dominant wavelength (color) and luminous flux (brightness), or in the case of royal blue, radiant flux (brightness). Amber, red-orange and red LEDs are additionally binned into forward voltage bins. LEDs are shipped on reels containing LEDs from one bin and are always labeled with the appropriate bin code.


Kits contain LEDs from a number of similar bins and are fully defined by their order codes. A full explanation of the order codes for each family, as well as a list of standard order codes, is provided in this document.



BIN AND ORDER CODE FORMATS

Bin codes and order codes are configured in the following manner:

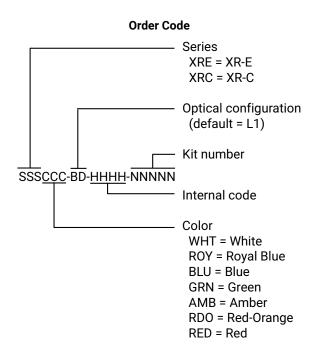

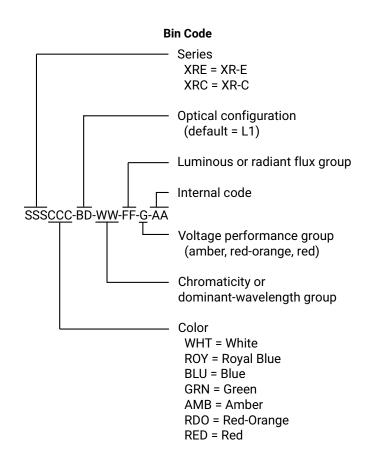



PERFORMANCE GROUPS - BRIGHTNESS

White XLamp XR-E and XR-C LEDs are tested for luminous flux and placed into one of the following luminous-lux groups:

Group	Minimum Luminous Flux @ 350 mA (lm)	Maximum Luminous Flux @ 350 mA (lm)
M2	39.8	45.7
M3	45.7	51.7
N2	51.7	56.8
N3	56.8	62.0
N4	62.0	67.2
P2	67.2	73.9
P3	73.9	80.6
P4	80.6	87.4
Q2	87.4	93.9
Q3	93.9	100
Q4	100	107
Q5	107	114
R2	114	122

Blue and green XLamp XR-E and XR-C LEDs are tested for luminous flux and placed into one of the following luminous-flux groups:

Group	Minimum Luminous Flux @ 350 mA (lm)	Maximum Luminous Flux @ 350 mA (lm)
G	13.9	18.1
Н	18.1	23.5
J	23.5	30.6
K	30.6	39.8
М	39.8	51.7
N	51.7	67.2
Р	67.2	87.4
Q	87.4	114

Amber, red-orange and red XLamp XR-C LEDs are tested for luminous flux and placed into one of the following luminous-flux groups:

Group	Minimum Luminous Flux @ 350 mA (lm)	Maximum Luminous Flux @ 350 mA (lm)
J	23.5	30.6
K2	30.6	35.2
K3	35.2	39.8
M2	39.8	45.7
M3	45.7	51.7
N2	51.7	56.8
N3	56.8	62.0
N4	62.0	67.2



PERFORMANCE GROUPS - BRIGHTNESS (CONTINUED)

Royal-blue XLamp XR-E and XR-C LEDs are tested for radiant flux and placed into one of the following radiant-flux groups:

Group	Minimum Radiant Flux (mW) @ 350 mA	Maximum Radiant Flux (mW) @ 350 mA
12	250	300
13	300	350
14	350	425
15	425	500
16	500	600

PERFORMANCE GROUPS - CHROMATICITY

White XLamp LEDs are tested for chromaticity and placed into one of the regions defined by the bounding coordinates below.

White Chromaticity Region Bounding Coordinates

Region	х	у	Region	х	у
	.283	.284		.314	.355
WK	.295	.297	WF	.316	.332
VVK	.298	.288	VVF	.306	.322
	.287	.276		.301	.342
	.292	.306		.317	.319
WA	.295	.297	WP	.329	.330
WA	.283	.284	VVP	.329	.318
	.279	.291		.318	.308
	.295	.297		.329	.345
WM	.308	.311	WD	.329	.330
VVIVI	.310	.300	VVD	.317	.319
	.298	.288		.316	.332
	.306	.322	WG	.329	.369
WB	.308	.311		.329	.345
VVD	.295	.297		.316	.332
	.292	.306		.314	.355
	.301	.342		.329	.330
WE	.306	.322	WJ	.329	.345
VVE	.292	.306	WJ	.346	.359
	.287	.321		.344	.342
	.308	.311		.348	.384
WN	.317	.319	WH	.346	.359
VVIN	.318	.308	VVII	.329	.345
	.310	.300		.329	.369
	.316	.332			
wc	.317	.319			
VVC	.308	.311			
	.306	.322			



PERFORMANCE GROUPS - CHROMATICITY (CONTINUED)

Region	х	у	Region	х	у	Region	х	у	Region	х	у
	.3371	.3490		.3376	.3616		.3463	.3687		.3451	.3554
3A	.3451	.3554	O.D.	.3463	.3687	3C	.3551	.3760	3D	.3533	.3620
3A	.3440	.3428	3B	.3451	.3554	36	.3533	.3620	30	.3515	.3487
	.3366	.3369		.3371	.3490		.3451	.3554		.3440	.3428
	.3512	.3465		.3529	.3597		.3615	.3659		.3590	.3521
4.4	.3529	.3597	4B	.3548	.3736	4C	.3641	.3804	4D	.3615	.3659
4A	.3615	.3659	48	.3641	.3804	40	.3736	.3874	4D	.3702	.3722
	.3590	.3521		.3615	.3659		.3702	.3722		.3670	.3578
	.3670	.3578		.3702	.3722		.3825	.3798		.3783	.3646
5A	.3702	.3722	CD.	.3736	.3874	5C	.3869	.3958	r.D.	.3825	.3798
5A	.3825	.3798	5B	.3869	.3958	50	.4006	.4044	5D	.3950	.3875
	.3783	.3646		.3825	.3798		.3950	.3875		.3898	.3716
	.3889	.3690		.3941	.3848		.4080	.3916		.4017	.3751
6A	.3941	.3848	CD	.3996	.4015	6C	.4146	.4089	6D	.4080	.3916
бА	.4080	.3916	6B	.4146	.4089	ьс	.4299	.4165	бД	.4221	.3984
	.4017	.3751		.4080	.3916		.4221	.3984		.4147	.3814
	.4147	.3814		.4221	.3984		.4342	.4028		.4259	.3853
7.4	.4221	.3984	70	.4299	.4165	70	.4430	.4212	70	.4342	.4028
7A	.4342	.4028	7B	.4430	.4212	7C	.4562	.4260	7D	.4465	.4071
	.4259	.3853		.4342	.4028		.4465	.4071		.4373	.3893
	.4373	.3893		.4465	.4071		.4582	.4099		.4483	.3919
0.4	.4465	.4071	O.D.	.4562	.4260	00	.4687	.4289	0.0	.4582	.4099
8A	.4582	.4099	8B	.4687	.4289	8C	.4813	.4319	8D	.4700	.4126
	.4483	.3919		.4582	.4099		.4700	.4126		.4593	.3944



PERFORMANCE GROUPS - DOMINANT WAVELENGTH

Color XLamp LEDs are tested for dominant wavelength (DWL) and placed into one of the DWL groups defined below.

Color	DWL Group	Minimum DWL (nm) @ 350 mA	Maximum DWL (nm) @ 350 mA
	D3	450	455
Royal Blue	D4	455	460
	D5	460	465
	В3	465	470
Blue	B4	470	475
Blue	B5	475	480
	В6	480	485
	G2	520	525
Green	G3	525	530
	G4	530	535
Amber	A2	585	590
Ambei	A3	590	595
Red-Orange	03	610	615
Neu-Oldlige	04	615	620
Dod	R2	620	625
Red	R3	625	630


PERFORMANCE GROUPS - FORWARD VOLTAGE


Amber, red-orange and red XLamp LEDs are tested for forward voltage and placed into one of the forward voltage groups defined below.

Forward Voltage Group	Minimum Forward Voltage @ 350 mA	Maximum Forward Voltage @ 350 mA
В	1.75	2.0
С	2.0	2.25
D	2.25	2.5



CREE'S STANDARD CHROMATICITY REGIONS PLOTTED ON THE 1931 CIE CURVE

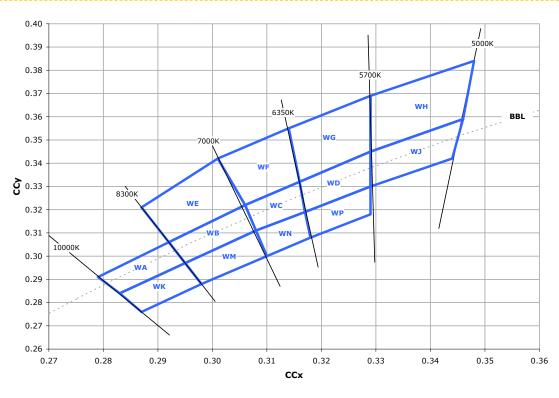

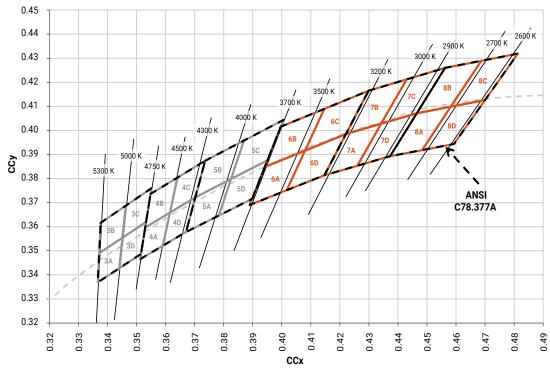



STANDARD ORDER CODES AND BINS (XR-C COOL WHITE)

The following tables list standard kit numbers and performance bins. Kit numbers completely describe an order code's chromaticity regions and luminous flux range.

XLamp XR-C LED Standard Order Codes - White					
Minimum Luminous Flux (lm) @ 350 mA*		Chromaticity Regions	Kit Number		
Group	Flux (lm)				
		Cool White (5000 K - 10,000 K)			
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00801		
P3	73.9	WC, WD, WF, WG	00802		
		WC, WD, WF, WG, WH, WJ, WN, WP	00803		
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00901		
P4	80.6	WC, WD, WF, WG	00902		
				WC, WD, WF, WG, WH, WJ, WN, WP	00903
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00A01		
Q2	87.4	WC, WD, WF, WG	00A02		
		WC, WD, WF, WG, WH, WJ, WN, WP	00A03		
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00B01		
Q3	93.9	WC, WD, WF, WG	00B02		
		WC, WD, WF, WG, WH, WJ, WN, WP	00B03		

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.



STANDARD ORDER CODES AND BINS (XR-C NEUTRAL WHITE)

The following tables list standard kit numbers and performance bins. Kit numbers completely describe an order code's chromaticity regions and luminous flux range.

XLamp XR-C LED Standard Order Codes - White						
Minimum Luminous Flux (lm) @ 350 mA*				ССТ		
Group	Flux (lm)					
		Neutral White (3700 K - 5000 K)				
N3	56.8	5C, 5D, 6A, 6B	005F6	3700 K		
		4A, 4B, 4C, 4D	006F5	4300 K		
N4	62.0	5A, 5B, 5C, 5D	006E5	4000 K		
		5C, 5D, 6A, 6B	006F6	3700 K		
		3A, 3B, 3C, 3D	007E3	5000 K		
		3C, 3D, 4A, 4B	007F4	4750 K		
DO	67.0	4A, 4B, 4C, 4D	007E4	4500 K		
P2	67.2	4C, 4D, 5A, 5B	007F5	4300 K		
		5A, 5B, 5C, 5D	007E5	4000 K		
		5C, 5D, 6A, 6B	007F6	3700 K		
		3A, 3B, 3C, 3D	008E3	5000 K		
		3C, 3D, 4A, 4B	008F4	4750 K		
-	70.0	4A, 4B, 4C, 4D	008E4	4500 K		
P3	73.9	4C, 4D, 5A, 5B	008F5	4300 K		
		5A, 5B, 5C, 5D	008E5	4000 K		
		5C, 5D, 6A, 6B	008F6	3700 K		
		3A, 3B, 3C, 3D	009E3	5000 K		
		3C, 3D, 4A, 4B	009F4	4750 K		
P4	80.6	4A, 4B, 4C, 4D	009E4	4500 K		
		4C, 4D, 5A, 5B	009F5	4300 K		
		5A, 5B, 5C, 5D	009E5	4000 K		
		3A, 3B, 3C, 3D	00AE3	5000 K		
Q2	87.4	3C, 3D, 4A, 4B	00AF4	4750 K		
		4A, 4B, 4C, 4D	00AE4	4500 K		

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.



STANDARD ORDER CODES AND BINS (XR-C WARM WHITE)

The following tables list standard kit numbers and performance bins. Kit numbers completely describe an order code's chromaticity regions and luminous flux range.

XLamp XR-C LED Standard Order Codes - White						
Minimum Luminous Flux (lm) @ 350 mA*		Chromaticity Regions	Kit Number	сст		
Group	Flux (lm)					
		Warm White (2600 K - 3700 K)				
N2	51.7	7C, 7D, 8A, 8B	004F8	2900 K		
INZ	51.7	8A, 8B, 8C, 8D	004E8	2700 K		
		6A, 6B, 6C, 6D	005E6	3500 K		
		6C, 6D, 7A, 7B	005F7	3200 K		
N3	56.8	7A, 7B, 7C, 7D	005E7	3000 K		
		7C, 7D, 8A, 8B	005F8	2900 K		
		8A, 8B, 8C, 8D	005E8	2700 K		
		6A, 6B, 6C, 6D	006E6	3500 K		
		6C, 6D, 7A, 7B	006F7	3200 K		
N4	62.0	7A, 7B, 7C, 7D	006E7	3000 K		
		7C, 7D, 8A, 8B	006F8	2900 K		
		8A, 8B, 8C, 8D	006E8	2700 K		
		6A, 6B, 6C, 6D	007E6	3500 K		
P2	67.2	6C, 6D, 7A, 7B	007F7	3200 K		
		7A, 7B, 7C, 7D	007E7	3000 K		
P3	73.9	6A, 6B, 6C, 6D	008E6	3500 K		

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.



STANDARD ORDER CODES AND BINS (XR-C COLOR)

The following tables list standard kit numbers and performance bins. Kit numbers completely describe an order code's dominant-wavelength range and luminous- or radiant-flux range.

XLamp XR-C LED Standard Order Codes - Royal Blue								
Color	Minimum Radiant Flux (mW) @ 350 mA*							
			Minimum		Maximum		Kit Number	
	Group	Flux (mW)	Group	DWL (nm)	Group	DWL (nm)		
Royal Blue	12	250	D3	450	D5	465	00701	
			D3	450	D4	460	00702	
			D4	455	D5	465	00703	
	13 300		D3	450	D5	465	00801	
		300	D3	450	D4	460	00802	
			D4	455	D5	465	00803	

For other flux and dominant wavelength combinations, contact Cree or an authorized distributor.

Copyright © 2004-2016 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree® and XLamp® are registered trademarks and the Cree logo is a trademark of Cree, Inc. This document is provided for informational purposes only and is not a warranty or a specification. For product specifications, please see the data sheets available at www.cree.com. For warranty information, please contact Cree Sales at sales@cree.com.

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.



STANDARD ORDER CODES AND BINS (XR-C COLOR) - CONTINUED

	XLar	np XR-C LED Stan	dard Order Code	s - Blue, Green, Ar	mber, Red-Orange	e, Red	
Color	Minimum Luminous Flux (lm) @ 350 mA*						
			Minimum		Maximum		Kit Number
	Group	Flux (lm)	Group	DWL (nm)	Group	DWL (nm)	
	G	13.9	В3	465	B4	475	00G01
Blue	Н	18.1	В3	465	B4	475	00H01
			G2	520	G4	535	00M01
	М	39.8	G2	520	G3	530	00M02
0			G3	525	G4	535	00M03
Green			G2	520	G4	535	00N01
	N	51.7	G2	520	G3	530	00N02
			G3	525	G4	535	00N03
	J	00.5	A2	585	A3	595	00J01
		23.5	A3	590	A3	595	00J03
	K2	30.6	A2	585	A3	595	00K01
Amber			A3	590	A3	595	00K03
	M2	39.8	A2	585	A3	595	00M01
			A3	590	A3	595	00M03
	К2	30.6	03	610	04	620	00K01
			03	610	03	615	00K02
D 10			04	615	04	620	00K03
Red-Orange			03	610	04	620	00M01
	M2	39.8	03	610	03	615	00M02
			04	615	04	620	00M03
		00.5	R2	620	R3	630	00J01
	J	23.5	R2	620	R2	625	00J02
D 1	1/0	30.6	R2	620	R3	630	00K01
Red	K2		R2	620	R2	625	00K02
	140	22.2	R2	620	R3	630	00M01
	M2 39	39.8	R2	620	R2	625	00M02

For other flux and dominant wavelength combinations, contact Cree or an authorized distributor.

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.



STANDARD ORDER CODES AND BINS (XR-E COOL WHITE)

The following tables list standard kit numbers and performance bins. Kit numbers completely describe an order code's chromaticity regions and luminous flux range.

XLamp XR-E LED Standard Order Codes - White						
Minimum Luminous Flux (lm) @ 350 mA*		Chromaticity Regions	Kit Number			
Group	Flux (lm)					
Cool White (5000 K - 10,000 K)						
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00901			
P4	80.6	WC, WD, WF, WG	00902			
		WC, WD, WF, WG, WH, WJ, WN, WP	00903			
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00A01			
Q2	87.4	WC, WD, WF, WG	00A02			
		WC, WD, WF, WG, WH, WJ, WN, WP	00A03			
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00B01			
Q3	93.9	WC, WD, WF, WG	00B02			
		WC, WD, WF, WG, WH, WJ, WN, WP	00B03			
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00C01			
Q4	100	WC, WD, WF, WG	00C02			
		WC, WD, WF, WG, WH, WJ, WN, WP	00C03			
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00D01			
Q5	107	WC, WD, WF, WG	00D02			
		WC, WD, WF, WG, WH, WJ, WN, WP	00D03			
		WA, WB, WC, WD, WE, WF, WG, WH, WJ, WK, WM, WN, WP	00E01			
R2	114	WC, WD, WF, WG	00E02			
		WC, WD, WF, WG, WH, WJ, WN, WP	00E03			

For other flux and chromaticity combinations, contact Cree or an authorized distributor.

Copyright © 2004-2016 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree® and XLamp® are registered trademarks and the Cree logo is a trademark of Cree, Inc. This document is provided for informational purposes only and is not a warranty or a specification. For product specifications, please see the data sheets available at www.cree.com. For warranty information, please contact Cree Sales at sales@cree.com.

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.



STANDARD ORDER CODES AND BINS (XR-E NEUTRAL WHITE)

The following tables list standard kit numbers and performance bins. Kit numbers completely describe an order code's chromaticity regions and luminous flux range.

	XLamp XR-E LED Standard Order Codes - White							
@ 35	ninous Flux (lm) 60 mA*	Chromaticity Regions	Kit Number	ССТ				
Group	Flux (lm)							
Neutral White (3700 K - 5000 K)								
N4	4 62.0	5C, 5D, 6A, 6B	006F6	3700 K				
		4C, 4D, 5A, 5B	007F5	4300 K				
P2	67.2	5A, 5B, 5C, 5D	007E5	4000 K				
		5C, 5D, 6A, 6B	007F6	3700 K				
		3A, 3B, 3C, 3D	008E3	5000 K				
		3C, 3D, 4A, 4B	008F4	4750 K				
P3	73.9	4A, 4B, 4C, 4D	008E4	4500 K				
13	70.5	4C, 4D, 5A, 5B	008F5	4300 K				
		5A, 5B, 5C, 5D	008E5	4000 K				
		5C, 5D, 6A, 6B	008F6	3700 K				
		3A, 3B, 3C, 3D	009E3	5000 K				
		3C, 3D, 4A, 4B	009F4	4750 K				
P4	00.6	4A, 4B, 4C, 4D	009E4	4500 K				
P4	80.6	4C, 4D, 5A, 5B	009F5	4300 K				
		5A, 5B, 5C, 5D	009E5	4000 K				
		5C, 5D, 6A, 6B	009F6	3700 K				
		3A, 3B, 3C, 3D	00AE3	5000 K				
		3C, 3D, 4A, 4B	00AF4	4750 K				
		4A, 4B, 4C, 4D	00AE4	4500 K				
Q2	87.4	4C, 4D, 5A, 5B	00AF5	4300 K				
		5A, 5B, 5C, 5D	00AE5	4000 K				
		5C, 5D, 6A, 6B	00AF6	3700 K				
		3A, 3B, 3C, 3D	00BE3	5000 K				
		3C, 3D, 4A, 4B	00BF4	4750 K				
Q3	93.9	4A, 4B, 4C, 4D	00BE4	4500 K				
		4C, 4D, 5A, 5B	00BF5	4300 K				
		5A, 5B, 5C, 5D	00BE5	4000 K				
		3A, 3B, 3C, 3D	00CE3	5000 K				
Q4	100	3C, 3D, 4A, 4B	00CF4	4750 K				
		4A, 4B, 4C, 4D	00CE4	4500 K				
		•						

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.



STANDARD ORDER CODES AND BINS (XR-E WARM WHITE)

The following tables list standard kit numbers and performance bins. Kit numbers completely describe an order code's chromaticity regions and luminous flux range.

XLamp XR-E LED Standard Order Codes - White							
Minimum Lum @ 350	ninous Flux (lm) 0 mA*	Chromaticity Regions	Kit Number	сст			
Group	Flux (lm)						
	Warm White (2600 K - 3700 K)						
		6C, 6D, 7A, 7B	005F7	3200 K			
N3	56.8	7A, 7B, 7C, 7D	005E7	3000 K			
IN3	56.8	7C, 7D, 8A, 8B	005F8	2900 K			
		8A, 8B, 8C, 8D	005E8	2700 K			
		6A, 6B, 6C, 6D	006E6	3500 K			
		6C, 6D, 7A, 7B	006F7	3200 K			
N4	62.0	7A, 7B, 7C, 7D	006E7	3000 K			
		7C, 7D, 8A, 8B	006F8	2900 K			
		8A, 8B, 8C, 8D	006E8	2700 K			
	67.2	6A, 6B, 6C, 6D	007E6	3500 K			
		6C, 6D, 7A, 7B	007F7	3200 K			
P2		7A, 7B, 7C, 7D	007E7	3000 K			
		7C, 7D, 8A, 8B	007F8	2900 K			
		8A, 8B, 8C, 8D	007E8	2700 K			
		6A, 6B, 6C, 6D	008E6	3500 K			
		6C, 6D, 7A, 7B	008F7	3200 K			
P3	73.9	7A, 7B, 7C, 7D	008E7	3000 K			
		7C, 7D, 8A, 8B	008F8	2900 K			
		8A, 8B, 8C, 8D	008E8	2700 K			
		6A, 6B, 6C, 6D	009E6	3500 K			
P4	80.6	6C, 6D, 7A, 7B	009F7	3200 K			
		7A, 7B, 7C, 7D	009E7	3000 K			
Q2	87.4	6A, 6B, 6C, 6D	00AE6	3500 K			

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.



STANDARD ORDER CODES AND BINS (XR-E COLOR)

The following tables list standard kit numbers and performance bins. Kit numbers completely describe an order code's dominant-wavelength range and luminous- or radiant-flux range.

XLamp XR-E LED Standard Order Codes - Royal Blue								
Color	Minimum Radiant Flux (mW)		Dominant Wavelength (nm)					
	@ 35	@ 350 mA*		Minimum		Maximum		
	Group	Flux (mW)	Group	DWL (nm)	Group	DWL (nm)		
			D3	450	D5	465	00701	
	12	250	D3	450	D4	460	00702	
			D4	455	D5	465	00703	
	13	300	D3	450	D5	465	00801	
			D3	450	D4	460	00802	
David Dhia			D4	455	D5	465	00803	
Royal Blue		4 350	D3	450	D5	465	00901	
	14		D3	450	D4	460	00902	
			D4	455	D5	465	00903	
	15 425		D3	450	D5	465	00A01	
		425	425 D3	450	D4	460	00A02	
			D4	455	D5	465	00A03	

XLamp XR-E LED Standard Order Codes - Blue and Green							
	Minimum Radiant Flux (mW) @ 350 mA*		Dominant Wavelength (nm)				
Color			Minimum		Maximum		Kit Number
	Group	Flux (mW)	Group	DWL (nm)	Group	DWL (nm)	
			В3	465	В6	485	00J01
		22.5	В3	465	B5	480	00J02
	K	23.5	B4	470	B5	480	00J03
Blue			В3	465	B4	475	00J04
Blue		30.6	В3	465	В6	485	00K01
			В3	465	B5	480	00K02
	K		B4	470	B5	480	00K03
			В3	465	B4	475	00K04
	Р	67.2	G2	520	G4	535	00P01
Green			G2	520	G3	530	00P02
			G3	525	G4	535	00P03

For other flux and dominant wavelength combinations, contact Cree or an authorized distributor.

^{*} Cree XLamp XR Famly LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.