


**Auxiliary contact, for PLS, postal Code, PKNM, ZP-A40...-ASA...IHK...WHK,  
Z-MS, 1N/0+1N/C, 0.5HP**

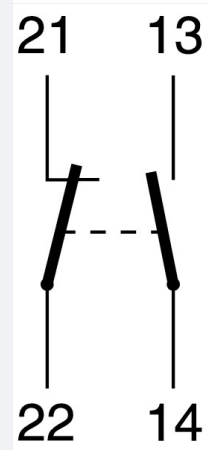

**Part no. ZP-IHK**  
**Article no. 286052**

## Delivery programme

Basic function		Accessories for combined residual-current/power circuit-breakers Accessories for miniature circuit breaker
Basic function accessories		Auxiliary contacts
Application		Switchgear for industrial and commercial applications
Product range		Accessory
Side mounting		for fitting on left to: LS, FI/LS
Contact sequence		

## Design verification as per IEC/EN 61439

Technical data for design verification		
Operating ambient temperature min.	°C	-5
Operating ambient temperature max.	°C	40

## Technical data ETIM 6.0

Devices for distribution board-/surface mounting (EG000062) / Auxiliary contact unit for distribution board (EC001286)		
Electric engineering, automation, process control engineering / Electrical installation, device / Breaker switch component / Auxiliary contact unit for distribution board (ecl@ss8.1-27-14-35-02 [AKE327010])		
Device fitting		Universal
Additional equipment		Auxiliary switch
Attached at delivery		No
Assembly width (TE)		0.5
Number of normally open contacts		1
Number of normally closed contacts		1
Number of change-over contacts		0
Number of fault-signal switches		0
Rated switch current	A	3
Nominal rated voltage	V	230
Control voltage type		AC
With autotest for earth leakage function		No
Suitable for max. number of poles main contact unit (total)		2
Suitable for max. current main contact unit	A	6

## Dimensions

