

Series 71 Aluminum Extractor




MATERIALS AND FINISH

Material:

6061-T6 Aluminum alloy per QQ-A-250/8 **Finish:** Customer specified


WEIGHT


Aluminum: .05 oz. (1.42 g) Stainless Steel: .15 oz. (4.25 g)

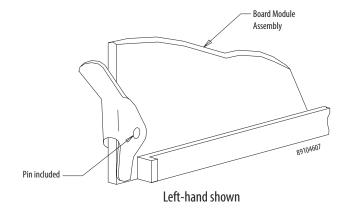


APPLICATION DATA

Two (2) extractors are recommended per board. (One "L" and one "R" per printed circuit board). Provides extraction travel of 11.4 (.45) mininum, with a mechanical advantage of 4.5:1

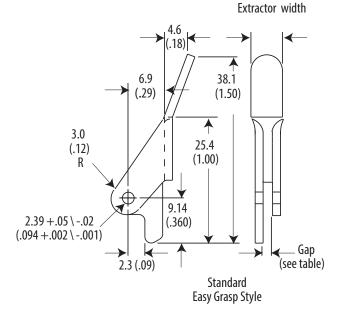


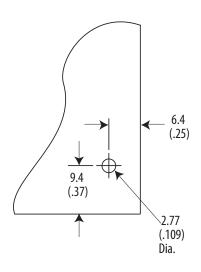

SERIES 71 ALUMINUM EXTRACTOR

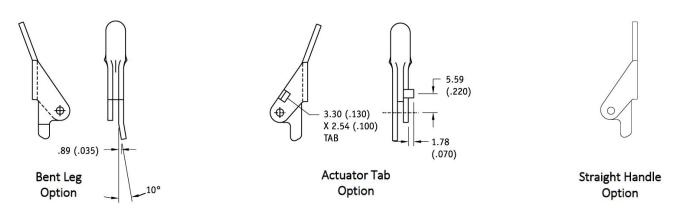

The bent leg option is required when using the extractor with Lok Tainers for PCB retention within sheet metal (non-cold wall) applications. Additionally, if using a lever actuated Lok Tainer, the actuator tab will work in conjunction with the lever to release the PCB.

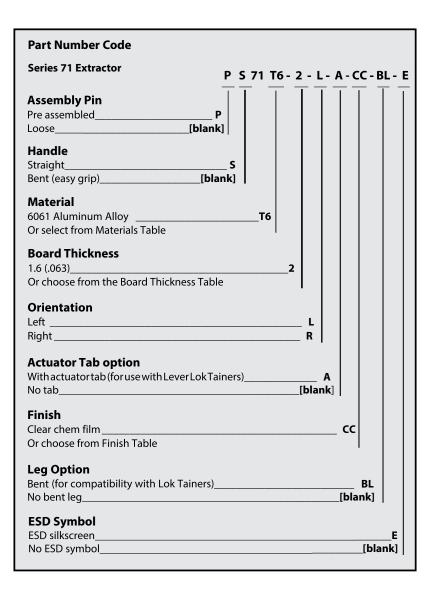

MATERIALS TABLE				
DASH #	MATERIAL			
[blank]	.063 ALUMINUM			
	ALLOY 5052-H32			
	PER QQ-A-250/8			
T6	.063 ALUMINUM			
	ALLOY 6061-T6			
CR	.063 STAINLESS			
	STEEL			

BOARD THICKNESS TABLE					
DASH #	THICKNESS	А	MAX		
-1	0.787 (.031)	6.35 (.25)	6.60 (.26)		
-2	1.600 (.063)	6.35 (.25)	7.37 (.29)		
-3	2.390 (.094)	6.35 (.25)	7.37 (.29)		
-4	3.180 (.125)	7.37 (.29)	8.38 (.33)		
-5	3.960 (.156)	7.37 (.29)	8.38 (.33)		

FINISH TABLE				
DASH #	FINISH	COLOR		
-1	ANODIZE PER MIL-A-8625	RED		
-2	ANODIZE PER MIL-A-8625	BLUE		
-3	ANODIZE PER MIL-A-8625	GREEN		
-4	ANODIZE PER MIL-A-8625	YELLOW		
-5	ANODIZE PER MIL-A-8625	BLACK		
-6	ANODIZE PER MIL-A-8625	ORANGE		
-7	ANODIZE PER MIL-A-8625	PURPLE		
-8	ANODIZE PER MIL-A-8625	GRAY		
-9	ANODIZE PER MIL-A-8625	BROWN		
-10	ANODIZE PER MIL-A-8625	CLEAR		
-CC	CHEM FILM PER MIL-C-5541	CLEAR		
[blank]	CHEM FILM PER MIL-C-5541	GOLD		



nVent may modify standard parts without prior notice to or approval from customers. These modifications may change product appearance, but will not have a detrimental effect on form, fit or function. ©2018 nVent. All nVent marks and logos are owned or licensed by nVent Services GmbH or its affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without notice.