## **SIEMENS**

## Data sheet

## 3RH2911-1HA31



AUX.SWITCH BLOCK,FRONT,3NO+1NC, CURR.PATH: 1NC, 1NO, 1NO, 1NO, F. CONT. RELAYS A. MOTOR CONT., 3RT2 SCREW TERMINAL .1/.2,.3/.4,.3/.4,.3/.4

	SIRIUS Contactor relay and power contactor
	• •
	IP20
°C	-55 +80
°C	-25 +60
	10 000 000
	200 000
	one incorrect switching operation of 100 million switching operations (17 V, 1 mA)
	1 faulty switching per 100 million (17 V, 1 mA)
V	690
kV	6
	1
	0
	3
	0
А	10
	°C V kV

a at 220 M	٨	10
• at 230 V	A	
• maximum	A	10
Operating current		
of the auxiliary contacts		
— at AC-14		
— at 125 V	A	6
— at 250 V	A	6
— at AC-15		
— at 24 V	A	6
— at 230 V	A	6
— at 400 V	A	3
<ul> <li>at AC-15 at 690 V Rated value</li> </ul>	А	1
Operating current	_	
<ul> <li>with 2 current paths in series at DC-12</li> </ul>		
— at 24 V Rated value	А	10
— at 60 V Rated value	А	10
— at 110 V Rated value	А	4
— at 220 V Rated value	А	2
— at 440 V Rated value	А	1.3
— at 600 V Rated value	А	0.65
<ul> <li>with 3 current paths in series at DC-12</li> </ul>		
— at 24 V Rated value	А	10
— at 60 V Rated value	А	10
— at 110 V Rated value	А	10
— at 220 V Rated value	А	3.6
— at 440 V Rated value	А	2.5
— at 600 V Rated value	А	1.8
Operating current	_	
<ul> <li>of the auxiliary contacts at DC-13</li> </ul>		
— at 24 V	А	6
— at 60 V	А	2
— at 110 V	А	1
— at 220 V	А	0.3
<ul> <li>with 2 current paths in series at DC-13</li> </ul>		
— at 24 V Rated value	А	10
— at 60 V Rated value	А	3.5
— at 110 V Rated value	А	1.3
— at 220 V Rated value	А	0.9
— at 440 V Rated value	А	0.2
— at 600 V Rated value	А	0.1
<ul> <li>with 3 current paths in series at DC-13</li> </ul>		
with o burront patho in ochoo at DO-10		

— at 24 V Rated value	А	10
— at 60 V Rated value	А	4.7
— at 110 V Rated value	А	3
— at 220 V Rated value	А	1.2
— at 440 V Rated value	А	0.5
— at 600 V Rated value	А	0.26

Installation/ mounting/ dimensions:			
Mounting type		snap-on mounting	
Width	mm	36	
Height	mm	37.5	
Depth	mm	43.7	

Connections/ Terminals:		
Type of electrical connection for auxiliary and control	screw-type terminals	
current circuit		
Type of connectable conductor cross-section		
<ul> <li>for auxiliary contacts</li> </ul>		
— finely stranded		
— with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
<ul> <li>for AWG conductors for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)	
Safety related data:		
Product function Mirror contact acc. to IEC 60947-4-1	Yes	
Note	with 3RT2	
Product function positively driven operation acc. to	Yes	
IEC 60947-5-1		
Note	with 3RH2	

General Produc	t Approval			Declaration of Conformity	Test Certificates
	(SA) CSA		EHC	EG-Konf.	<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>
Test Certificates	Shipping App	proval			
<u>Special Test</u> <u>Certificate</u>	ABS	BUREAU VERITAS	ĴÅ DNV DNV	GL	Lloyd's Kegister LRS
Shipping Approv	val		other		
PRS	RINA	RMRS	Environmental Confirmations	VDE	

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) http://www.siemens.com/industrymall

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RH29111HA31

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RH29111HA31/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/index.aspx?attID9=3RH29111HA31&lang=en

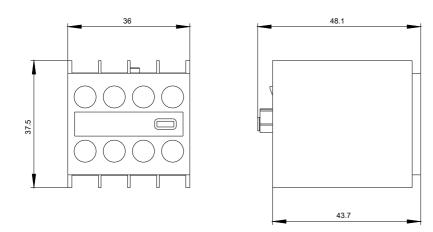

3RT2

