LTO 150 Vishay Sfernice

RoHS

COMPLIANT

Clip Mount Power Resistor Thick Film Technology




www.vishay.com

LTO150 are the extension of LTO series. The component is used in direct contact with heatsink. Fixation done by clip.

FEATURES

- 150 W at 45 °C case temperature heatsink mounted
- Direct mounting ceramic on heatsink
- Broad resistance range: 0.03 Ω to 1.3 $M\Omega$
- Non inductive
- TO-247 package: compact and easy to mount
- Designed for clip mounting
- UL 94 V-0 material used Compliant with EN45545-2
- AEC-Q200 qualified
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

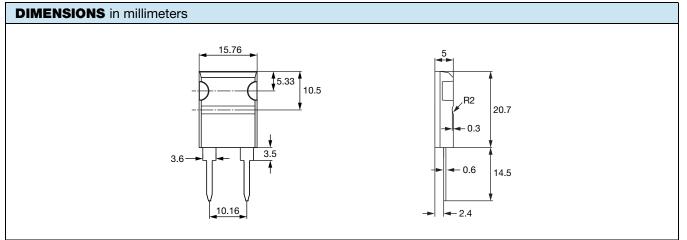

Note

Tolerances unless stated: ± 0.3 mm

STANDARD ELECTRICAL SPECIFICATIONS							
MODEL	SIZE	RESISTANCE RANGE Ω	RATED POWER P _{45 °C} W	LIMITING ELEMENT VOLTAGE U _L V	TOLERANCE ± %	TEMPERATURE COEFFICIENT ± ppm/°C	$\begin{array}{c} \textbf{CRITICAL}\\ \textbf{RESISTANCE}\\ \Omega \end{array}$
LTO 150	TO-247	0.03 to 1.3M	150	500	1, 2, 5, 10	200, 350, 900	1.66K

MECHANICAL SPECIFICATIONS			
Mechanical Protection	Molded		
Resistive Element	Thick film		
Substrate	Alumina		
Connections	Tinned copper		
Weight	4 g max.		
Clip Assembly Force	60 N to 110 N		

ENVIRONMENTAL SPECIFICATIONS			
Temperature Range-55 °C to +175 °C			
Climatic Category	55 / 175 / 56		
Flammability	IEC 60695-11-5 2 applications 30 s separated by 60 s		

TECHNICAL SPECIFICATIONS				
Dissipation and Associated	Onto a heatsink + clip			
Power Rating and Thermal Resistance of the Component	150 W at +45 °C (case temp.) R _{TH (j - c)} : 0.87 °C/W Free air: 4.5 W at +25 °C			
Temperature Coefficient	See Performance table ± 200 ppm/°C			
Dielectric Strength IEC 60115-1	3000 V _{RMS} - 1 min 10 mA max.			
Insulation Resistance	$\geq 10^4 \text{ M}\Omega$			
Inductance	≤ 0.1 μH			

Revision: 13-Apr-18

1 For technical questions, contact: <u>sferfixedresistors@vishay.com</u> Document Number: 50071

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000



www.vishay.com

Vishay Sfernice

PERFORMANCE					
TESTS	CONDITIONS	REQUIREMENTS			
Momentary Overload	IEC 60115-1 1.5 Pr/5 s <i>U</i> _S < 1.5 <i>U</i> _L	± (0.5 % + 0.005 Ω)			
Load Life	IEC 60115-1 1000 h Pr (free air) at +25 °C 90/30	± (1 % + 0.005 Ω)			
High Temperature Exposure	AEC-Q200 REV D conditions: MIL-STD-202 method 108 1000 h, +175 °C, unpowered	± (0.5 % + 0.005 Ω)			
Temperature Cycling	AEC-Q200 REV D conditions: JESD22 method JA-104 1000 cycles, -55 °C to +125 °C dwell time -15 min	± (1 % + 0.005 Ω)			
Biased Humidity	AEC-Q200 REV D conditions: MIL-STD-202 method 103 1000 h, 85 °C, 85 % RH (10 % of free air power)	± (1 % +0.005 Ω)			
Operational Life	AEC-Q200 REV D conditions: MIL-STD-202 method 108 1000 h, 90/30, powered (free air) at +125 °C	± (1 % +0.005 Ω)			
ESD Human Body Model	AEC-Q200 REV D conditions: AEC-Q200-002 IEC 61000-4-2 25 kV _{AD}	± (0.5 % +0.005 Ω)			
Vibration	AEC-Q200 REV D conditions: MIL-STD-202 method 204 5 g's for 20 min, 12 cycles test from 10 Hz to 2000 Hz	± (0.5 % +0.005 Ω)			
Mechanical Shock	AEC-Q200 REV D conditions: MIL-STD-202 method 213 100 g's, 6 ms, 3.75 m/s 3 shocks/direction	± (0.5 % +0.005 Ω)			
Terminal Strength	AEC-Q200 REV D conditions: AEC-Q200-006 2 kgf, 60 s	± (0.25 % +0.01 Ω)			

SPECIAL FEATURES					
Resistance Values	≥ 0.015	≥ 0.1 > 20			
Tolerances	± 1 % at ± 10 %				
Typical Temperature Coefficient (-55 ° to +175 °C)	± 900 ppm/°C	± 350 ppm/°C	± 200 ppm/°C		

CHOICE OF THE HEATSINK

The user must choose according to the working conditions of the component (power, room temperature).

Maximum working temperature must not exceed 175 °C. The dissipated power is simply calculated by the following ratio:

$$P = \frac{\Delta T}{[R_{TH (j-c)}] + [R_{TH (c-h)}] + [R_{TH (h-a)}]}^{(1)}$$

P: Expressed in W

 ΔT : Difference between maximum working temperature and room temperature

R_{TH (j - c)}: Thermal resistance value measured between resistive layer and outer side of the resistor. It is the thermal resistance of the component.

R_{TH (c - h}): Thermal resistance value measured between outer side of the resistor and upper side of the heatsink. This is the thermal resistance of the interface (grease, thermal pad), and the quality of the fastening device.

 $R_{TH (h - a)}$: Thermal resistance of the heatsink

Example:

 $R_{TH\ (c\ -\ h)}+R_{TH\ (h\ -\ a)}$ for LTO 150 power rating 10 W at ambient temperature +25 °C Thermal resistance $R_{TH\ (j\ -\ c)}$: 0.87 °C/W Considering equation $^{(1)}$ we have:

 $\begin{array}{l} \Delta T = 175 \ ^{\circ}\text{C} - 25 \ ^{\circ}\text{C} = 150 \ ^{\circ}\text{C} \\ \text{R}_{\text{TH} \ (j \ - \ c)} + \text{R}_{\text{TH} \ (c \ - \ h)} + \text{R}_{\text{TH} \ (h \ - \ a)} = \frac{\Delta T}{P} = \frac{150}{10} = 15 \ ^{\circ}\text{C/W} \\ \text{R}_{\text{TH} \ (c \ - \ h)} + \text{R}_{\text{TH} \ (h \ - \ a)} = 15 \ ^{\circ}\text{C/W} - 0.87 \ ^{\circ}\text{C/W} = 14.13 \ ^{\circ}\text{C/W} \end{array}$

Example with a thermal grease $R_{TH (c-h)} = 0.5$ °C/W, we need a heatsink with $R_{TH (h-a)} = 13.63$ °C/W

Revision: 13-Apr-18

Document Number: 50071

LTO 150



Vishay Sfernice

	CONFIGURATION 1	CONFIGURATION 2	CONFIGURATION 3
Power Dissipation (W)	150	35	26
T° Resistive Element (°C)	175	175	175
R _{тн (j - c)} Max. (°C/W)	0.87	0.87	0.87
R _{TH (c - h)} Typ. (°C/W)	0.127	0.33	0.33
R _{TH (h - a)} Max. (°C/W)	0.069	3.09	4.57
Fluid T° (°C)	15 (water)	25 (air)	25 (air)

CONFIGURATION 1: Water cooling heatsink CP15 from Lytron (304 mm x 95.3 mm x 8 mm) with water flow rate 4 LPM and thermal grease Bluesil Past 340 from BlueStar silicones. MAX08NG from AAVID screwed clip mounting.

CONFIGURATION 2: Air cooling heatsink 0S552 from AAVID (48 mm x 80 mm x 70 mm) and thermal grease Bluesil Past 340 from BlueStar silicones. MAX03HNG from AAVID clipped mounting.


CONFIGURATION 3: Air cooling heatsink 0S550 from AAVID (31.75 mm x 58.7 mm x 70 mm) and thermal grease Bluesil Past 340 from BlueStar silicones. MAX03HNG from AAVID clipped mounting.

MOMENTARY OVERLOAD


In any case the applied voltage must be lower than the maximum overload voltage of 750 V during 5 s.

ENERGY CURVE (SINGLE PULSE)

The values indicated on the graph below are applicable to resistors in air or mounted onto a heatsink.




POWER CURVE



POWER RATING

The temperature of the case should be maintained within the limits specified.




PACKAGING	
Tube of 30 units	

MARKING

Model, style, resistance value (in Ω), tolerance (in %), manufacturing date, Vishay Sfernice trademark according IEC 60062.

Revision: 13-Apr-18

3

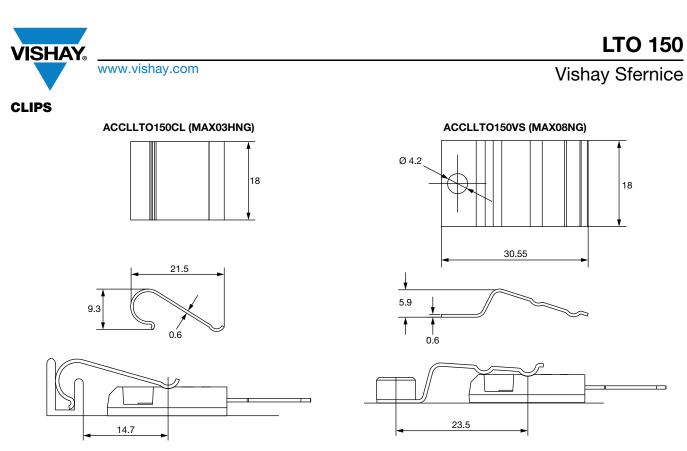

CLIP MOUNTING RECOMMENDATION

To improve the thermal conductivity, all surface of ceramic has to be coated with a thermal silicon grease. If you not use our clipped or screwed clip, it is recommended that a mounting force of 60 N to 110 N be applied to the center of the molding case of the component. Tightening torque 2 Nm when mounting screwed clip MAX08NG on heatsink.

ORDERING INFORMATION							
LTO MODEL	150 STYLE	F CONNECTIONS	2.7 k Ω RESISTANCE VALUE	± 1 % TOLERANCE ± 1 % ± 2 % ± 5 % ± 10 %	xxx CUSTOM DESIGN Optional on request: special TCR, shape etc.	TU30 PACKAGING	e3 LEAD (Pb)-FREE
GLOBAL	. PART	NUMBER INFO	RMATION				
GLOBAL MODEL LTO			lial leads The first significant last digi number of R designat 48701 10002 R010 R4701	27IIC VALUEfour digits are t figures and the t specifies the f zeros to follow.res decimal point. $70 = 48.7 \Omega$ = 48 700 \Omega= 100 000 \Omega $00 = 0.01 \Omega$ $00 = 0.47 \Omega$ 2700 $\Omega = 2.7 \text{ k}\Omega$	K = 10 %	J T PACKAGING T = tube Tube 30 pieces	E 3 LEAD (Pb)-FREE E3 = pure tin
CLIP PART NUMBER INFORMATION							
REFERENCE				PART NUMBER FOR ORDERING			
Screwed clip MAX08NG				ACCLLTO150VS			
Clipped clip MAX03HNG				ACCLLT0150CL			

Revision: 13-Apr-18

For technical questions, contact: sferfixedresistors@vishay.com

Document Number: 50071

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

4