

APPROVAL SHEET

WF12R, WF08R, WF06R

 $\pm 0.5\%$, $\pm 0.25\%$, $\pm 0.1\%$, $\pm 0.05\%$

TC25

High Precision Power Thin Film chip resistors

Size 1206, 0805, 0603

*Contents in this sheet are subject to change without prior notice.



FEATURE

- 1. SMD metal film resistor
- 2. High reliability and stability of \pm 0.5% and below per customer request
- 3. High performance of TCR: 25 ppm/K and below per customer request
- High power rating
- 5. Low current noise

APPLICATION

- 1. Medical equipment
- 2. Measuring instrument
- 3. Communication device
- 4. Computer
- Printer

DESCRIPTION

The resistors are constructed in a high grade ceramic body (aluminum oxide). Internal metal electrodes are added at each end and connected by a resistive layer that is applied to the top surface of the substrate. The composition of the resistive layer is adjusted to give the approximate resistance required and the value is trimmed to nominated value within tolerance which controlled by laser trimming of this resistive layer.

The resistive layer is covered with a protective coat. Finally, the two external end terminations are added. For environmental soldering issue, the outer layer of these end terminations is a Lead-free solder.

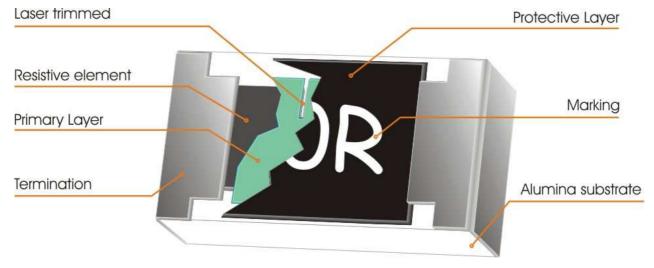


Fig 1. Construction of Chip-R WFxxR



QUICK REFERENCE DATA


Item	General Specification				
Series No.	WF12R	WF08R	WF06R		
Size code	1206 (3216)	0805 (2012)	0603(1608)		
Resistance Tolerance	±0.5%, ±0.25%, ±0.1%, ±0.05%				
Resistance Range	$4.7\Omega \sim 1M\Omega$	$4.7\Omega \sim 1M\Omega$ $4.7\Omega \sim 1M\Omega$			
	(E24 +E192)	(E24 +E192)	(E24 +E192)		
TCR (ppm/°C)		+25 ~ -25 ppm/°C			
Max. dissipation at T _{amb} =70°C	1/4W	1/8W	1/10W		
Max. Operation Voltage (DC or RMS)	200V	150V	75V		
Max. Overload Voltage (DC or RMS)	400V	300V	150V		
Operation temperature	- 55~ +155'C				

Note:

- 1. This is the maximum voltage that may be continuously supplied to the resistor element, see "IEC publication 60115-8"
- 2. Max. Operation Voltage : So called RCWV (Rated Continuous Working Voltage) is determined by $RCWV = \sqrt{Rated Power \times Resistance \ Value} \ or \ Max. \ RCWV \ listed \ above, \ whichever \ is \ lower.$
- 3. Tolerance $\pm 0.05\%$ is upon requested

DIMENSIONS:(unit:mm)

Туре	WF12R	WF08R	WF06R
L	3.05 ± 0.15	2.00 ± 0.10	1.55 ± 0.10
W	1.55 ± 0.15	1.25 ± 0.10	0.80 ± 0.10
Α	0.40 ± 0.20	0.25 ± 0.20	0.25 ± 0.15
В	0.40 ± 0.20	0.40 ± 0.20	0.30 ± 0.15
t	0.55 ± 0.15	0.50 ± 0.15	0.45 ± 0.15





MARKING

• 3-digits marking for 0603 size

WFxxR has same marking rule as commodity ±1%.

3-digits marking (±1%:0603)

Nominal	resistan	ce			Description										
1.E-24 s	eries			As <i>060</i> 3	s 0603 WR06X ±5%.										
2.E-96 s	eries			The 1st t	he 1st two digit codes are referring to the CODE on the table, the 3rd code is the index of resistar alue :					stance					
				$Y=10^{-2}$, $X=10^{-1}$, $A=10^{0}$, $B=10^{1}$, $C=10^{2}$, $D=10^{3}$, $E=10^{4}$, $F=10^{5}$											
				EX: $17.8\Omega = 25X \cdot 178\Omega = 25A \cdot 1K78 = 25B$											
							17K8=2	25C · 17	78K=25D	, 1M78	=25E				
3. Rema	ark			There is	no marki	ng for th	e items a	re not u	nder E-24	and E-	96 series				
CODE	R_value	CODE	R_value	CODE	R_Value	CODE	R_value	CODE	R_value	CODE	R_value	CODE	R_value	CODE	R_value
01	100	13	133	25	178	37	237	49	316	61	422	73	562	85	750
02	102	14	137	26	182	38	243	50	324	62	432	74	576	86	768
03	105	15	140	27	187	39	249	51	332	63	442	75	590	87	787
04	107	16	143	28	191	40	255	52	340	64	453	76	604	88	806
05	110	17	147	29	196	41	261	53	348	65	464	77	619	89	825
06	113	18	150	30	200	42	267	54	357	66	475	78	634	90	845
07	115	19	154	31	205	43	274	55	365	67	487	79	649	91	866
08	118	20	158	32	210	44	280	56	374	68	499	80	665	92	887
09	121	21	162	33	215	45	287	57	383	69	511	81	681	93	909
10	124	22	165	34	221	46	294	58	392	70	523	82	698	94	931
11	127	23	169	35	226	47	301	59	402	71	536	83	715	95	953
12	130	24	174	36	232	48	309	60	412	72	549	84	732	96	976

• 4-digits marking for 0805/1206 size

Each resistor is marked with a four digits code on the protective coating to designate the nominal resistance value of E24+E96. For values below $97\Omega6$ the R is used as a digit. For values of 100Ω or greater, the first 3 digits are significant, the fourth digit indicates the number of multiple to follow.

Example

RESISTANCE	10Ω	12Ω	100Ω	6800Ω	47000Ω
4-digits marking	10R0	12R0	1000	6801	4702

FUNCTIONAL DESCRIPTION

Product characterization

Standard values of nominal resistance are taken from the E24 & E192 series for resistors with a tolerance of $\pm 0.5\%$, $\pm 0.25\%$, $\pm 0.1\%$. The values of the E24/E192 series are in accordance with "IEC publication 60063".

Derating

The power that the resistor can dissipate depends on the operating temperature; see Fig.2




Fig.2 Maximum dissipation in percentage of rated power As a function of the ambient temperature

MOUNTING

Due to their rectangular shapes and small tolerances, Surface Mountable Resistors are suitable for handling by automatic placement systems.

Chip placement can be on ceramic substrates and printed-circuit boards (PCBs).

Electrical connection to the circuit is by individual soldering condition.

The end terminations guarantee a reliable contact.

SOLDERING CONDITION

The robust construction of chip resistors allows them to be completely immersed in a solder bath of 260°C for 10 seconds. Therefore, it is possible to mount Surface Mount Resistors on one side of a PCB and other discrete components on the reverse (mixed PCBs).

Surface Mount Resistors are tested for solderability at 235°C during 2 seconds within lead-free solder bath. The test condition for no leaching is 260°C for 30 seconds. Typical examples of soldering processes that provide reliable joints without any damage are given in Fig 3.

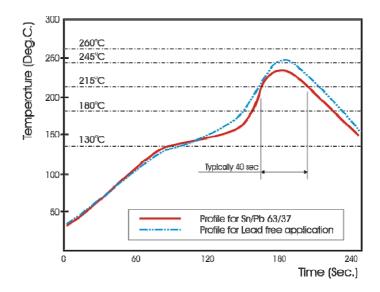


Fig 3. Infrared soldering profile for Chip Resistors



CATALOGUE NUMBERS

The resistors have a catalogue number starting with .

WF08	R	xxxx	D	Т	L
Size code	Type code	Resistance code	Tolerance	Packaging code	Termination code
WF12: 1206	R: TCR 25ppm	E24+E192:	A:±0.05%	T:Reeled	L = Sn base (lead free)
WF08: 0805	& High power	3 significant digits followed by no. of zeros	B:±0.10%		nee)
WF06: 0603		102Ω =1020	C:±0.25%		
		37.4KΩ =3742	D:±0.50%		
		220Ω =2200			

^{1.} Reeled tape packaging: 8mm width paper taping.

^{5,000}pcs/reel for WF12R, WF08R, WF06R;




TEST AND REQUIREMENTS(JIS C 5201-1: 1998)

TEST	PROCEDURE	REQUIREMENT
DC resistance Clause 4.5	DC resistance values measured <10Ω@0.1V, <100Ω@0.3V, <1KΩ@1.0V,	Within the specified tolerance
	<10ΚΩ@3V, <100ΚΩ@10V,<1ΜΩ@25V, <10ΜΩ@30V	
Temperature Coefficient of Resistance(T.C.R) Clause 4.8	Natural resistance change per change in degree centigrade. $\frac{R_2-R_1}{R_1(t_2-t_1)}\!\!\times\!10^6 \; \text{(ppm/°C)}$	Refer to "QUICK REFERENCE DATA"
	R ₁ : Resistance at reference temperature	
	R ₂ : Resistance at test temperature	
	t₁:20℃+5℃-1℃	
	t2 : 125℃+5℃-1℃	
Short time overload (S.T.O.L) Clause 4.13	Permanent resistance change after a 5second application of a voltage 2.5 times RCWV or the maximum overload voltage specified in the above list, whichever is less.	Δ R/R max. ±(0.5%+0.05 Ω)
Resistance to soldering heat(R.S.H)	Un-mounted chips completely immersed for 10±1second in	no visible damage
Clause 4.18	a SAC solder bath at 260°C±5°C	Δ R/R max. ±(0.25%+0.05 Ω)
Solderability	Un-mounted chips completely immersed for 2±0.5 second	good tinning (>95% covered)
Clause 4.17	in a SAC solder bath at 235℃±5℃	no visible damage
Temperature cycling	30 minutes at -55°C±3°C, 2~3 minutes at 20℃+5℃-	no visible damage
Clause 4.19	1°C, 30 minutes at +155 °C±3°C, 2~3 minutes at 20°C+5°C-1°C, total 5 continuous cycles	Δ R/R max. ±(0.5%+0.05Ω)
Load life (endurance) Clause 4.25	70±2°C, 1000 hours, loaded with RCWV or Vmax,1.5 hours on and 0.5 hours off	Δ R/R max. \pm (0.5%+0.05 Ω)
Load life in Humidity Clause 4.24	1000 hours, at rated continuous working voltage in humidity chamber controller at 40°C±2°C and 90~95% relative humidity, 1.5hours on and 0.5 hours off	Δ R/R max. \pm (0.5%+0.05 Ω)
Bending strength Clause 4.33	Resistors mounted on a 90mm glass epoxy resin PCB(FR4); bending : 3 mm, once for 10 seconds.	Δ R/R max. ±(0.1%+0.05 Ω)
Adhesion	Pressurizing force: 5N, Test time: 10±1sec.	No remarkable damage or removal of
Clause 4.32		the terminations.
Insulation Resistance	Apply the maximum overload voltage (DC) for 1minute	R≥10GΩ
Clause 4.6		
Dielectric Withstand	Apply the maximum overload voltage (AC) for 1 minute	No breakdown or flashover
Voltage		
Clause 4.7		



PACKAGING


Paper Tape specifications (unit :mm)

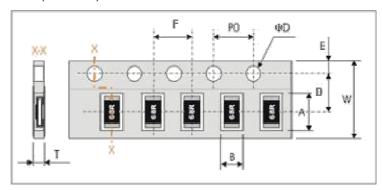

Series No.	А	В	W	D	E
WF12	3.60±0.20	2.00±0.20	8.00±0.30	3.50±0.20	1.75±0.10
WF08	2.40±0.20	1.65±0.20	8.00±0.30	3.50±0.20	1.75±0.10
WF06	1.90±0.20	1.10±0.20	8.00±0.30	3.50±0.20	1.75±0.10

Series No.	F	P0	ΦD	T
WF12	4.00±0.10	4.00±0.10	Ф1.50 ^{+0.1} _{-0.0}	Max. 1.0
WF08	4.00±0.10	4.00±0.10	Ф1.50 ^{+0.1} _{-0.0}	Max. 1.0
WF06	4.00±0.10	4.00±0.10	Ф1.50 ^{+0.1} _{-0.0}	0.65±0.05

Reel dimensions



Symbol	Α	В	С	D
(unit : mm)	Φ178.0±2.0	Φ60.0±1.0	13.0±0.2	9.0±0.5

Taping quantity

- Chip resistors 5,000 pcs per reel (WF12R, WF08R, WF06R)