


MIRO TR 24VDC 20KHZ IN<(><<>>1MA FK OPTO-COUPLER MODULE

IN: 30 VDC - OUT: 48 VDC / 0.2 A




Transistor 0.2 A
24 V DC
Control current 0.1 mA (5 V DC)
Spring clamp terminals

[Link to Product](#)

Illustration

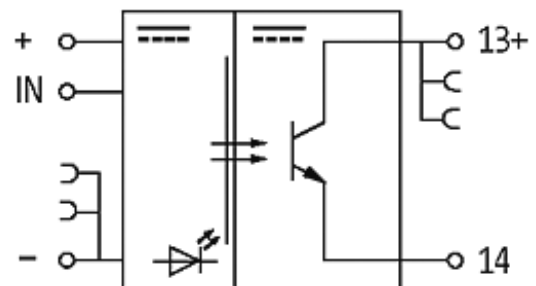


stay connected

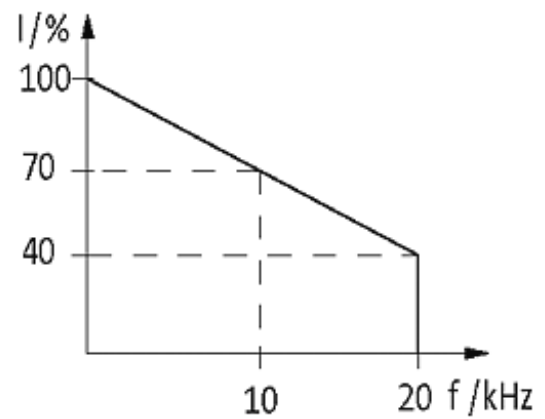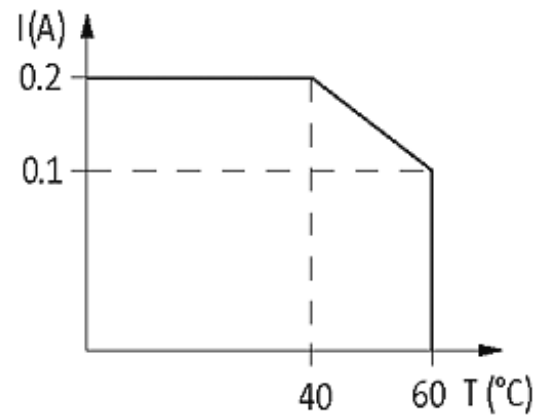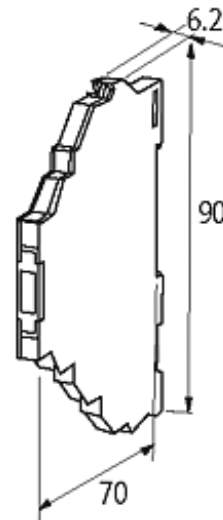

Product may differ from Image

Approvals

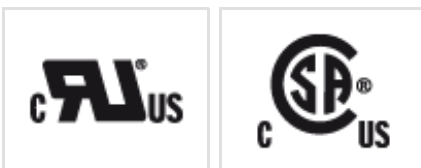

Input

Voltage range ON

4.2...30 V DC

Voltage range OFF	0...2 V DC
Control current	0.1 mA (5 V)
LED display	LED (yellow)

General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H × W × D	90×6.2×65 mm

Output

Switching voltage	5...48 V DC
Switching current per output	0.1 mA...0.2 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	10/18 µs
Switching frequency	max. 20 kHz

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1