# PMR209 Series Metallized Impregnated Paper, Class X2, 250 VAC



#### Overview

The PMR209 Series is constructed of multilayer metallized paper encapsulated and impregnated in self-extinguishing material meeting the requirements of UL 94 V–0.

## **Applications**

Typical applications include worldwide use in contact protection, contact interference suppression and transient suppression.

#### **Benefits**

· Approvals: ENEC, UL, cUL

Rated voltage: 250 VAC 50/60 Hz
Capacitance range: 0.047 – 0.47 µF

• Capacitance tolerance:  $\pm 20\%$  • Resistance range: 22 – 470  $\Omega$ 

Resistance tolerance: ±30%
Lead spacing: 15.2 – 25.4 mm

Climatic category: 40/085/56/B, IEC 60068–1

Tape and reel packaging in accordance with IEC 60286–2

· RoHS Compliant and lead-free terminations

• Operating temperature range of -40°C to +85°C

- Excellent self-healing properties which ensure long life even when subjected to frequent over voltages
- Good resistance to ionization due to impregnated paper dielectric
- High dV/dt capability
- Impregnated paper ensures excellent stability and reliability properties, particularly in applications with continuous operation



## **Legacy Part Number System**

PMR209	M	В	5470	M	047	R30
Series	Rated Voltage (VAC)	Lead Spacing (mm)	Capacitance Code (pF)	Capacitance Tolerance	Resistance (Ω)	Lead and Packaging Code
RC Snubber, Metallized Paper	M = 250	B = 15.2 C = 20.3 E = 25.4	Digits 2 – 4 (3) indicates the first three digits of the capacitance value. First digit indicates the total number of digits in the capacitance value.	M = ±20%	Resistance Value in Ω	See Ordering Options Table

## **New KEMET Part Number System**

Р	409	Q	M	473	M	250	А	H470
Capacitor Class	Series	Lead Spacing (mm)	Size Code	Capacitance Code (pF)	Capacitance Tolerance	Rated Voltage (VAC)	Lead and Packaging Code	Resistance (Ω)
P= Metallized Paper	RC Snubber	Q = 15.2 C = 20.3 E = 25.4	See Dimension Table	First two digits represent significant figures. Third digit specifies number of zeros.	M = ±20%	250 = 250	See Ordering Options Table	H + first two digits representing significant figures. Third digit specifies number of zeros.

One world. One KEMET




## **Ordering Options Table**

Lead Spacing Nominal (mm)	Type of Leads and Packaging	Lead Length (mm)	KEMET Lead and Packaging Code	Legacy Lead and Packaging Code
	Standard Lead and Packaging Options			
	Bulk (Bag) – Short Leads	6 +0/-1	С	R06
15.2	Bulk (Bag) – Max Length Leads	30 +5/-0	Α	R30
15.2	Tape & Reel (Standard Reel)	H <sub>0</sub> = 18.5 +/-0.5	L	R19T0
	Other Lead and Packaging Options			
	Tape & Reel (Large Reel)	H <sub>0</sub> = 18.5 +/-0.5	Р	R19T1
	Standard Lead and Packaging Options			
	Bulk (Tray) – Short Leads	6 +0/-1	С	R06
20.3	Bulk (Bag) – Max Length Leads	30 +5/-0	Α	R30
20.3	Tape & Reel (Standard Reel)	H <sub>0</sub> = 18.5 +/-0.5	L	R19T0
	Other Lead and Packaging Options			
	Tape & Reel (Large Reel)	H <sub>0</sub> = 18.5 +/-0.5	Р	R19T1
	Standard Lead and Packaging Options			
25.4	Bulk (Bag) – Short Leads	6 +0/-1	С	R06
	Bulk (Tray) – Max Length Leads	30 +5/-0	Α	R30



## **Dimensions - Millimeters**

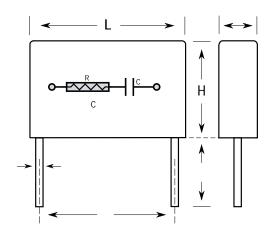

Size Code	р		В		Н		L		d	
Size Code	Nominal	Tolerance								
QM	15.2	+/-0.4	7.3	Maximum	13	Maximum	18.5	Maximum	0.8	+/-0.05
CE	20.3	+/-0.4	7.6	Maximum	14	Maximum	24	Maximum	0.8	+/-0.05
CP	20.3	+/-0.4	11.3	Maximum	16.5	Maximum	24	Maximum	0.8	+/-0.05
EJ	25.4	+/-0.4	12.1	Maximum	19	Maximum	30.5	Maximum	1.0	+/-0.05
EL	25.4	+/-0.4	15.3	Maximum	22	Maximum	30.5	Maximum	1.0	+/-0.05

Note: See Ordering Options Table for lead length (LL) options.



## **Performance Characteristics**

Rated Voltage	250 VAC 50/60 Hz				
Capacitance Range	0.047 – 0.47 μF				
Capacitance Tolerance	±20%				
Resistance Range	22 – 470 Ω				
Resistance Tolerance	±30%				
Temperature Range	-40°C to +85°C				
Climatic Category	40/085/56/B				
Approvals	ENEC, UL, cUL				
Peak Pulse Voltage	1,000 V				
Series Resistance	The series resistance is defined at 1 k for RC < 50 µs	Hz for RC ≥ 50 μs and at 100 kHz			
	Minimum Values Be	tween Terminals			
Insulation Resistance	C ≤ 0.33 µF	≥ 3,000 MΩ			
	C > 0.33 µF	≥ 1,000 MΩ • µF			
Pulse Current	Maximum 12 A repetitive. Maximum 20	A peak for occasional transients.			
Test Voltage Between Terminals	The 100% screening factory test is car level is selected to meet the requirement standards. All electrical characteristics	ents in applicable equipment			
In DC Applications	Recommended voltage ≤ 630 VDC				
Power Ratings	The average losses may reach 0.5 W does not exceed + 85°C. For maximur temperature, see Derating Curves.				
Derating Curves	Maximum Allowable Power Dissipation Case Sizes.  O.5  Pmax W 1 2 3 4 5  O40 50 60 70  Curve 1 2 3 4	Temb			



## **Environmental Test Data**

Test	IEC Publication	Procedure
Vibration	IEC 60068-2-6 Test Fc	3 directions at 2 hours each 10 – 500 Hz at 0.75 mm or 98 m/s <sup>2</sup>
Bump	IEC 60068-2-29 Test Eb	4,000 bumps at 390 m/s <sup>2</sup>
Solderability	IEC 60068-2-20 Test Ta	Wetting time d or d > 0.8 < 1.5 seconds
Active Flammability	IEC 60384-14	V <sub>R</sub> + 20 surge pulses at 2.5 kV (pulse every 5 seconds)
Passive Flammability	IEC 60384-14	IEC 60384-1, IEC 60695-11-5 Needle-flame test
Damp Heat Steady State	IEC 60068-2-78 Test Cab	+40°C and 93% RH, 56 days

## **Approvals**

Certification Body	Mark	Specification	File Number
Intertek Semko AB		EN/IEC 60384-14	SE/0140-28C
UL	c <b>Flu</b> us	UL 60384-14 CAN/ CSA-E60384-14-09	E73869

## **Environmental Compliance**

All KEMET EMI capacitors are RoHS Compliant.





## **Table 1 – Ratings & Part Number Reference**


Lead	Capacitance	Resistance	Maximun	n Dimensio	ns in mm	New KEMET	Legacy Part Number
Spacing (p)	Value (µF)	(Ω)	В	Н	L	Part Number	Legacy Part Number
15.2	0.047	47	7.3	13	18.5	P409QM473M250(1)H470	PMR209MB5470M047(1)
15.2	0.047	100	7.3	13	18.5	P409QM473M250(1)H101	PMR209MB5470M100(1)
20.3	0.1	22	7.6	14	24	P409CE104M250(1)H220	PMR209MC6100M022(1)
20.3	0.1	33	7.6	14	24	P409CE104M250(1)H330	PMR209MC6100M033(1)
20.3	0.1	47	7.6	14	24	P409CE104M250(1)H470	PMR209MC6100M047(1)
20.3	0.1	68	7.6	14	24	P409CE104M250(1)H680	PMR209MC6100M068(1)
20.3	0.1	100	7.6	14	24	P409CE104M250(1)H101	PMR209MC6100M100(1)
20.3	0.1	150	11.3	16.5	24	P409CP104M250(1)H151	PMR209MC6100M150(1)
20.3	0.1	220	11.3	16.5	24	P409CP104M250(1)H221	PMR209MC6100M220(1)
20.3	0.1	330	11.3	16.5	24	P409CP104M250(1)H331	PMR209MC6100M330(1)
20.3	0.1	470	11.3	16.5	24	P409CP104M250(1)H471	PMR209MC6100M470(1)
20.3	0.22	22	11.3	16.5	24	P409CP224M250(1)H220	PMR209MC6220M022(1)
20.3	0.22	33	11.3	16.5	24	P409CP224M250(1)H330	PMR209MC6220M033(1)
20.3	0.22	47	11.3	16.5	24	P409CP224M250(1)H470	PMR209MC6220M047(1)
20.3	0.22	68	11.3	16.5	24	P409CP224M250(1)H680	PMR209MC6220M068(1)
20.3	0.22	100	11.3	16.5	24	P409CP224M250(1)H101	PMR209MC6220M100(1)
20.3	0.22	150	11.3	16.5	24	P409CP224M250(1)H151	PMR209MC6220M150(1)
20.3	0.22	220	11.3	16.5	24	P409CP224M250(1)H221	PMR209MC6220M220(1)
25.4	0.22	330	12.1	19	30.5	P409EJ224M250(1)H331	PMR209ME6220M330(1)
25.4	0.22	470	15.3	22	30.5	P409EL224M250(1)H471	PMR209ME6220M470(1)
25.4	0.47	33	15.3	22	30.5	P409EL474M250(1)H330	PMR209ME6470M033(1)
25.4	0.47	47	15.3	22	30.5	P409EL474M250(1)H470	PMR209ME6470M047(1)
25.4	0.47	68	15.3	22	30.5	P409EL474M250(1)H680	PMR209ME6470M068(1)
25.4	0.47	100	15.3	22	30.5	P409EL474M250(1)H101	PMR209ME6470M100(1)
25.4	0.47	150	15.3	22	30.5	P409EL474M250(1)H151	PMR209ME6470M150(1)
25.4	0.47	220	15.3	22	30.5	P409EL474M250(1)H221	PMR209ME6470M220(1)
Lead Spacing (p)	Capacitance Value (µF)	Resistance Ω	B (mm)	H (mm)	L (mm)	New KEMET Part Number	Legacy Part Number

<sup>(1)</sup> Insert lead and packaging code. See Ordering Options Table for available options.



## **Soldering Process**

The implementation of the RoHS Directive has required the use of SnAuCu (SAC) or SnCu alloys as primary solder. These alloys require a higher liquidus temperature (217°C – 221°C) as compared to SnPb eutectic alloy (183°C). Due to the higher pre-heat and wave temperatures, the heat stress to components has increased considerably. Polypropylene capacitors are especially sensitive to soldering temperature due to the relatively low melting point of polypropylene material (160°C – 170°C). As a result, wave soldering can be destructive, especially to mechanically small polypropylene capacitors with lead spacings of 5 –10 mm. For more information, please refer to KEMET's Recommended Soldering Profiles or contact a KEMET representative. IEC Publication 61760–1 Edition 2 may also be consulted for general guidelines.

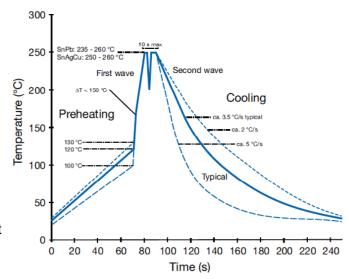

## **Marking**

- · KEMET's logo
- Series
- · RC unit
- Capacitance
- · Rated resistance
- · Rated voltage
- · IEC climatic category
- · Circuit diagram
- · Passive flammability class
- · Manufacturing date code


## **Packaging Quantities**

Size Code	Lead Spacing (mm)	Thickness (mm)	Height (mm)	Length (mm)	Bulk Short Leads	Bulk Long Leads	Standard Reel ø 360 mm
QM	15.2	7.3	13	18.5	500	100	600
CE	20.3	7.6	14	24	250	1500	250
CP	20.3	11.3	16.5	24	150	1000	180
EJ	25.4	12.1	19	30.5	100	800	
EL	25.4	15.3	22	30.5	75	600	



## Lead Taping & Packaging (IEC 60286-2)

L

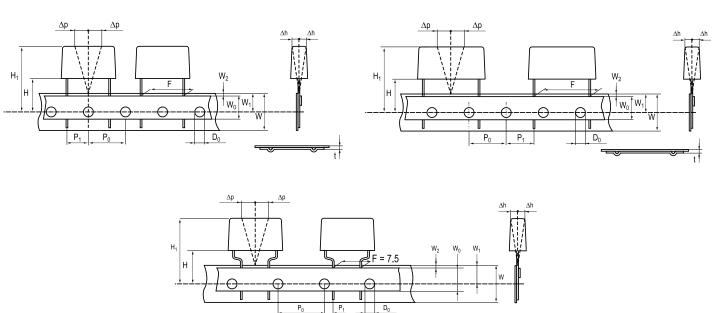

## **Taping Specification**

	Dimensions in mm										
Lead spacing	+6/-0.1	F	Formed 7.5	10.2	15.2	20.3	22.5	F			
Carrier tape width	+/-0.5	W	18	18	18	18	18	18+1/-0.5			
Hold-down tape width	+/-0.3	$W_{0}$	9	12	12	12	12				
Position of sprocket hole	+/-0.5	W <sub>1</sub>	9	9	9	9	9	9+0.75/-0.5			
Distance between tapes	Maximum	$W_2$	3	3	3	3	3	3			
Sprocket hole diameter	+/-0.2	$D_0$	4	4	4	4	4	4			
Feed hole lead spacing	+/-0.3	P <sub>0</sub> <sup>(1)</sup>	12.7(4)	12.7	12.7	12.7	12.7	12.7			
Distance lead – feed hole	+/-0.7	P <sub>1</sub>	3.75	7.6	5.1	8.9	5.3	P¹			
Deviation tape – plane	Maximum	Δр	1.3	1.3	1.3	1.3	1.3	1.3			
Lateral deviation	Maximum	Δh	2	2	2	2	2	2			
Total thickness	+/-0.2	t	0.7	0.7	0.7	0.7	0.9 <sup>MAX</sup>	0.9 <sup>MAX</sup>			
Sprocket hole/cap body	Nominal	H <sub>0</sub> <sup>(2)</sup>	18+2/-0	18+2/-0	18+2/-0	18+2/-0	18.5+/-0.5	18+2/-0			
Sprocket hole/top of cap body	Maximum	H <sub>1</sub> <sup>(3)</sup>	35	35	35	35	58	58 <sup>MAX</sup>			

<sup>(1)</sup> Maximum cumulative feed hole error, 1 mm per 20 parts.

<sup>(2) 16.5</sup> mm available on request.

<sup>(3)</sup> Depending on case size.


<sup>(4) 15</sup> mm available on request.



## Lead Taping & Packaging (IEC 60286-2) cont'd


## **Ammo Specifications**

Series	Dimensions (mm)					
Series	Н	W	Т			
R4x, R4x+R, R7x, RSB						
F5A, F5B, F5D	360	340	59			
F6xx, F8xx						
PHExxx, PMExxx, PMRxxx	330	330	50			



## **Reel Specifications**

Carias	Dimensions (mm)					
Series	D	Н	W			
R4x, R4x+R, R7x, RSB	0.55	00				
F5A, F5B, F5D	355 500	30 25	55 (Max)			
F6xx, F8xx	300	25				
PHExxx, PMExxx, PMRxxx	360 500	30	46 (Max)			

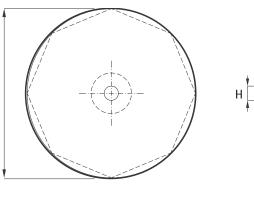

## **Manufacturing Date Code (IEC-60062)**

Y = Year, Z = Month				
Year	Code	Month	Code	
2000	M	January	1	
2001	N	February	2	
2002	Р	March	3	
2003	R	April	4	
2004	S	May	5	
2005	T	June	6	
2006	U	July	7	
2007	V	August	8	
2008	W	September	9	
2009	Χ	October	0	
2010	Α	November	N	
2011	В	December	D	
2012	С			
2013	D			
2014	E			
2015	F			
2016	Н			
2017	J			
2018	K			
2019	L			
2020	M			



## **KEMET Corporation World Headquarters**

2835 KEMET Way Simpsonville, SC 29681

Mailing Address: P.O. Box 5928 Greenville, SC 29606

www.kemet.com Tel: 864-963-6300 Fax: 864-963-6521

### **Corporate Offices**

Fort Lauderdale, FL Tel: 954-766-2800

#### **North America**

#### Southeast

Lake Mary, FL Tel: 407-855-8886

#### **Northeast**

Wilmington, MA Tel: 978-658-1663

#### Central

Novi, MI

Tel: 248-994-1030

#### West

Milpitas, CA Tel: 408-433-9950

Mexico

Guadalajara, Jalisco Tel: 52-33-3123-2141

#### **Europe**

#### Southern Europe

Paris, France Tel: 33-1-4646-1006

Sasso Marconi, Italy Tel: 39-051-939111

#### **Central Europe**

Landsberg, Germany Tel: 49-8191-3350800

Kamen, Germany Tel: 49-2307-438110

#### Northern Europe

Bishop's Stortford, United Kingdom Tel: 44-1279-460122

Espoo, Finland

Tel: 358-9-5406-5000

#### **Asia**

#### **Northeast Asia**

Hong Kong

Tel: 852-2305-1168

Shenzhen, China Tel: 86-755-2518-1306

Beijing, China

Tel: 86-10-5829-1711

Shanghai, China Tel: 86-21-6447-0707

Taipei, Taiwan Tel: 886-2-27528585

#### **Southeast Asia**

Singapore

Tel: 65-6586-1900

Penang, Malaysia Tel: 60-4-6430200

Bangalore, India Tel: 91-806-53-76817

Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.



#### Other KEMET Resources

Tools			
Resource	Location		
Configure A Part: CapEdge	http://capacitoredge.kemet.com		
SPICE & FIT Software	http://www.kemet.com/spice		
Search Our FAQs: KnowledgeEdge	http://www.kemet.com/keask		
Electrolytic LifeCalculator	http://www.kemet.com:8080/elc		

Product Information		
Resource	Location	
Products	http://www.kemet.com/products	
Technical Resources (Including Soldering Techniques)	http://www.kemet.com/technicalpapers	
RoHS Statement	http://www.kemet.com/rohs	
Quality Documents	http://www.kemet.com/qualitydocuments	

Product Request			
Resource	Location		
Sample Request	http://www.kemet.com/sample		
Engineering Kit Request	http://www.kemet.com/kits		

Contact			
Resource	Location		
Website	www.kemet.com		
Contact Us	http://www.kemet.com/contact		
Investor Relations	http://www.kemet.com/ir		
Call Us	1-877-MyKEMET		
Twitter	http://twitter.com/kemetcapacitors		

#### **Disclaimer**

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product—related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicted or that other measures may not be required.



Digitally signed by Jeannette Calvo

DN: c=US, st=FL, l=Fort Lauderdale, o=KEMET Corp., ou=Marketing Communications,

cn=Jeannette Calvo, email=jeannettecalvo@kemet.com

Date: 2013.04.29 09:47:51 -04'00'