
# **DIN SIZE TIMERS COMMON OPTIONS**

## Terminal sockets (Unit: mm inch, Tolerance: ±1 ±.039)

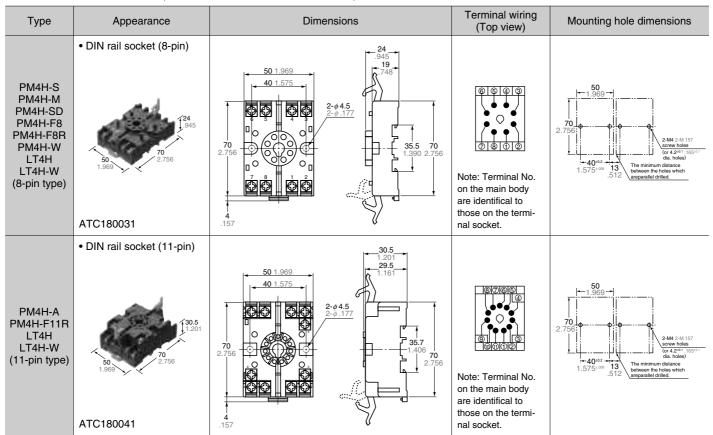


Note: The socket's numbering system matches that of the timer terminals.


## Sockets (Unit: mm inch, Tolerance: ±1 ±.039)


Туре	Appearance	Dimensions	Terminal wiring (Top view)	Mounting hole dimensions
PM4H-S PM4H-M PM4H-SD PM4H-F8 PM4H-F8R PM4H-W LT4H LT4H-W (8-pin type)	• Rear terminal socket  AT78041.496  AT78041.496	38 1.496 1.496 1.614 2 1 8 7 41 1.614 2 1 8 7		_
	• 8P cap 34.6 -1.362	φ31.4 φ1.236 φ1.236 φ32.5 φ1.280 φ31.5 γ1.24 (34.6) (1.362)	100 K	_
PM4H-A PM4H-F11R LT4H LT4H-W (11-pin type)	• Rear terminal socket  121 827 AT78051 772 1.709	5 21 197 187 187 167 187 187 187 187 187 187 187 187 187 187 187	@ @ @ @  @ @ @ @ 0 @ @	_
	• 11P cap  34.6  -1.362  -1.362  931.4  91.236  01.181  AT8-DP11	\$\delta_0^{\delta}1.4\\ \phi_1.236\\ \phi_1.236\\ \phi_1.236\\ \phi_1.236\\ \phi_1.236\\ \phi_1.236\\ \phi_1.236\\ \phi_1.236\\ \phi_1.280\\ \phi_1.	(3 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	_


Note: The terminal socket's numbering system matches that of the timer terminals.

# **Mounting parts**










### **ACCESSORIES**

#### **PM4H series**

• Panel cover (Black)

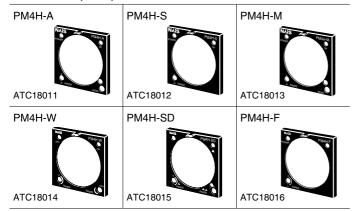


#### Set ring



When you control the fixed time range, the setting rings (a set of 2 pcs.) make it easy to do the time setting and keep the time range all the time. (Excluding PM4H-W)

#### LT4H series

Panel cover (Black)



The black panel cover is also available so that you can change the appearance of the panel by changing the panel cover. The color of the standard panel cover is ash gray.