# multicomp PRO

### RoHS Compliant



### Specifications:

Inductance	: 15µH
Inductance Tolerance	: ± 20%
DC Resistance Max	: 0.19Ω
DC Current Rating	: 1.05A
Self Resonant Frequency	: 27MHz
Inductor Case Style	: SMD
No. of Pins	: 2
Lead Spacing	: 2mm
Core Material	: Ferrite
External Depth	: 4.8mm
External Length / Height	: 3mm
External Width	: 5mm
Resonant Frequency	: 1kHz
Series	: SDC503

### **Electrical Characteristics (at 25°C)**

1kHz 1V	L	15µH ± 20%
at 25°C	DCR	190mΩ (Max.)
1kHz 1V Irms = 1.05A	ΔT	Temperature Rise 40°C (Max.)

Operating temperature: -55°C to +130°C

#### **Material List**

No.	ltem	Material Description
1	Core	R5A CDR5 × 3 (ST) B2 F1.5
2	Wire	Ø0.2mm × 1P 2UEF1/U 155°C
3	Solder (Lead Free)	Sn99.3%/Cu0.7%


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



### Inductor

# multicomp PRO


### **Schematic Diagram**



#### Note:

1. Wire Ø0.2mm x 1P 2UEF1/U 155°C 2. 24.5TS (Reference)


### **Electric Characteristics**

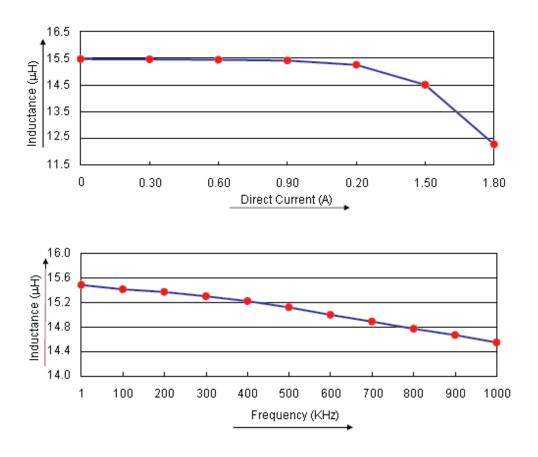

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



### **Configurations and Dimensions**

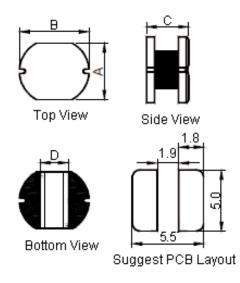

A	4.8 ±0.5mm	-
В	5 ±0.3mm	-
С	5 ±0.3mm	-
D	2mm	Reference

**Dimensions : Millimetres** 

### Part Number Table

Description	Part Number
Inductor, 15µH, 20%, SMD	MCSDC0503-150MU

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

